


投光照明器具特性

品名(品番)	NNQ3 2 0 7 2 BK+NTS9 1 0 2 3 B	
光源	LED3500_70_537 ×1	537.0 lm
管理番号	K0160403(0)DJ1 TF	


配光の区分・種類	軸対称配光 狭角形	主ビ-ム効率	72.3 %		
器具点灯角度		ビ-ム範囲	$I_{0/2}$	$I_{0/10}$	$I_{0/20}$
器具効率	100.0 %	ビ-ム効率	33.0%	65.2%	76.4%
最大光度	12845 cd/1000 lm	ビ-ム角	12.4	24.3	33.9

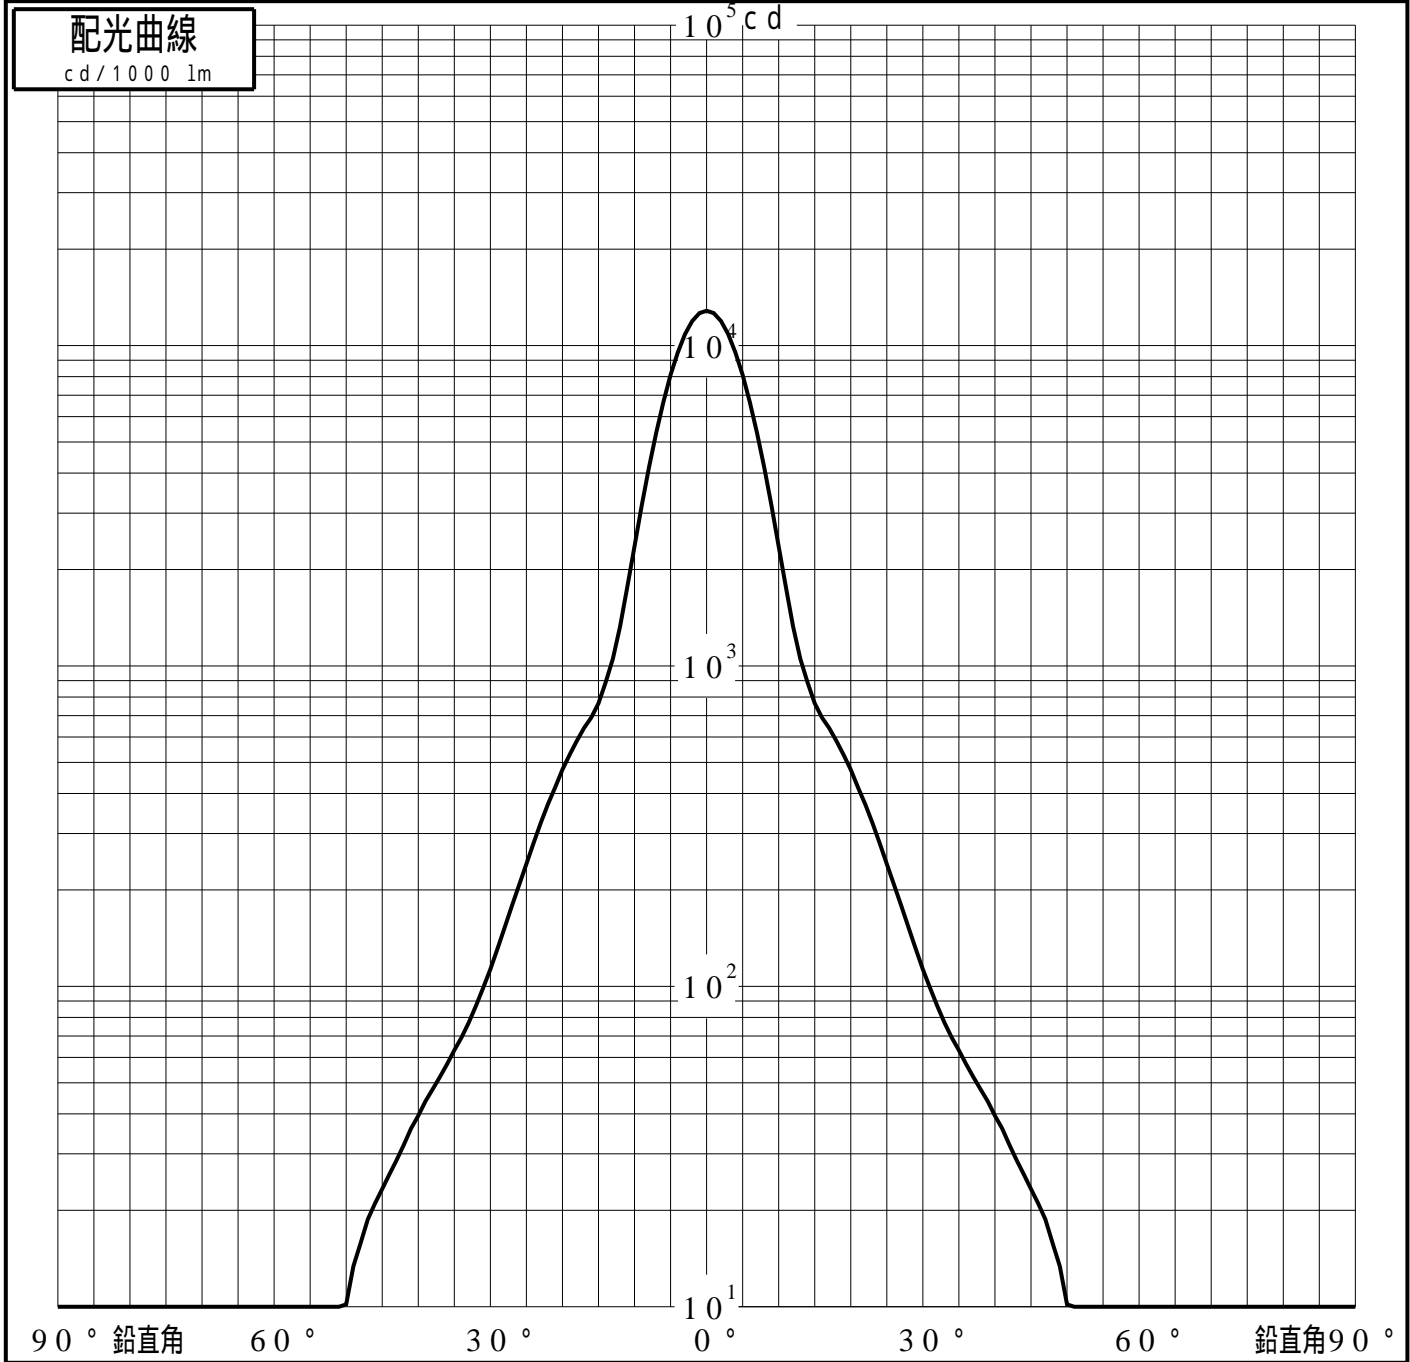

投光照明器具特性

品番 (品名)	NNQ32072BK+NTS91023B	光源	LED3500_70_537 ×1
管理番号	K0160403(0)DJ1 TF		

累積光束曲線

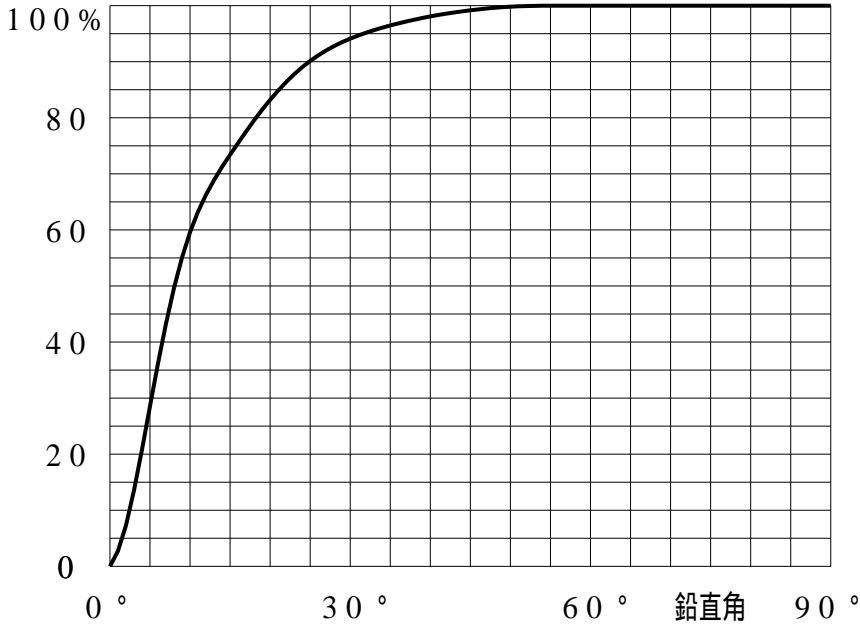

等光度曲線

(座標系)
cd/1000 lm

