


屋外照明器具特性

品番(品名)	NNY2 2 1 2 5 Z																		
光源	LED5000_70_3285 ×1 3285.0 lm																		
管理番号	K0167849(0)DB1																		
JISC8131-1999 による配光形式																			
器具効率 上方光束 下方光束	99.9%			直下光度			444.8 cd/1000lm												
	0.0%			最大光度			562.9 cd/1000lm												
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	444	447	428	391	339	284	233	190	155	124	96	71	50	33	21	12	4	0	0
90°	444	449	463	487	513	542	558	551	515	453	381	309	240	179	126	80	41	12	0
180°	444	423	387	340	289	242	200	165	135	109	85	66	49	35	23	14	6	1	0
270°	444	449	463	487	513	542	558	551	515	453	381	309	240	179	126	80	41	12	0
I _{max} を含む鉛直面	444	450	465	489	517	546	562	556	520	458	385	312	243	181	127	81	41	12	0

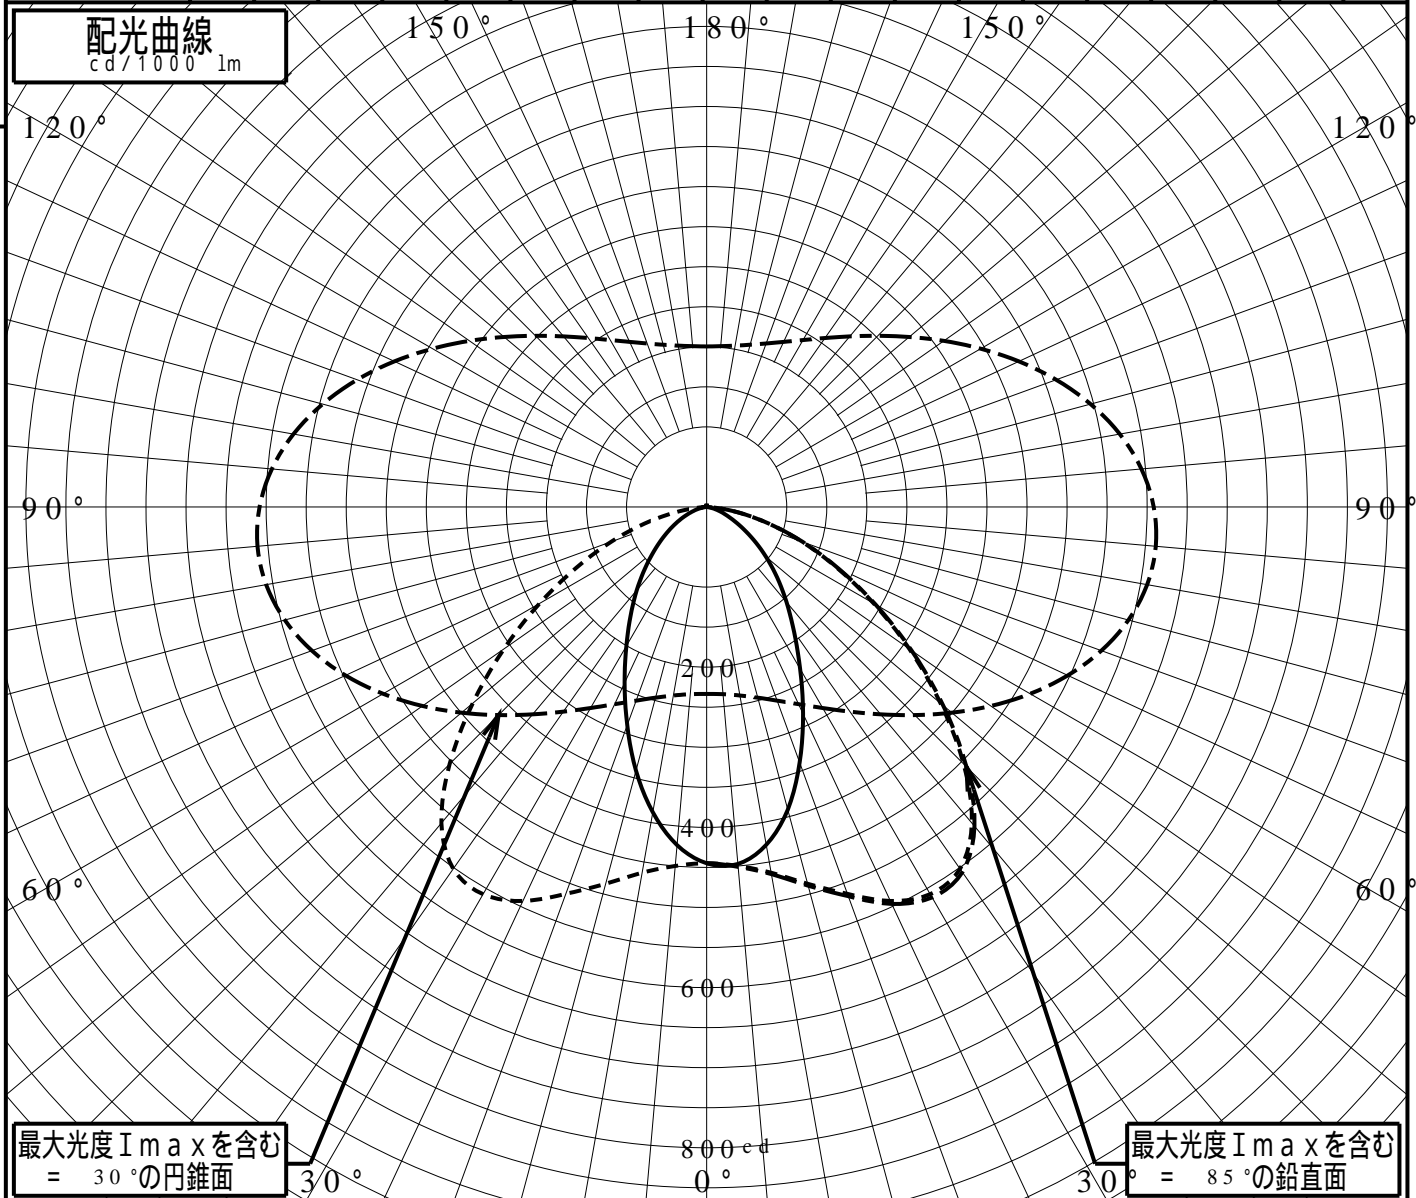

正弦等光度曲線

品番(品名)	NNY2 2 1 2 5 Z	光源	LED5000_70_3285 ×1
管理番号	K0167849(0)DB 1		

