


屋外照明器具特性

品番(品名)	NNY2 2 3 5 2 + YK3 4 0 5 0																		
光源	LED5000_70_1590 ×1 1590.0 lm																		
管理番号	K0167584(0)DB1																		
JISC8131-1999 による配光形式																			
器具効率	100.0%																		
直下光度	316.0 cd/1000lm																		
上方光束	0.9%																		
下方光束	99.1%																		
最大光度	382.7 cd/1000lm																		
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	316	338	358	372	379	381	376	365	350	330	304	273	238	199	161	125	92	60	34
90°	316	315	314	312	308	303	292	278	262	242	218	193	167	139	111	86	62	40	21
180°	316	292	268	243	215	185	156	128	101	75	51	30	13	4	1	0	0	0	0
270°	316	315	314	312	308	303	292	278	262	242	218	193	167	139	111	86	62	40	21
I _{max} を含む鉛直面	316	338	358	372	379	381	376	365	350	330	304	273	238	199	161	125	92	60	34

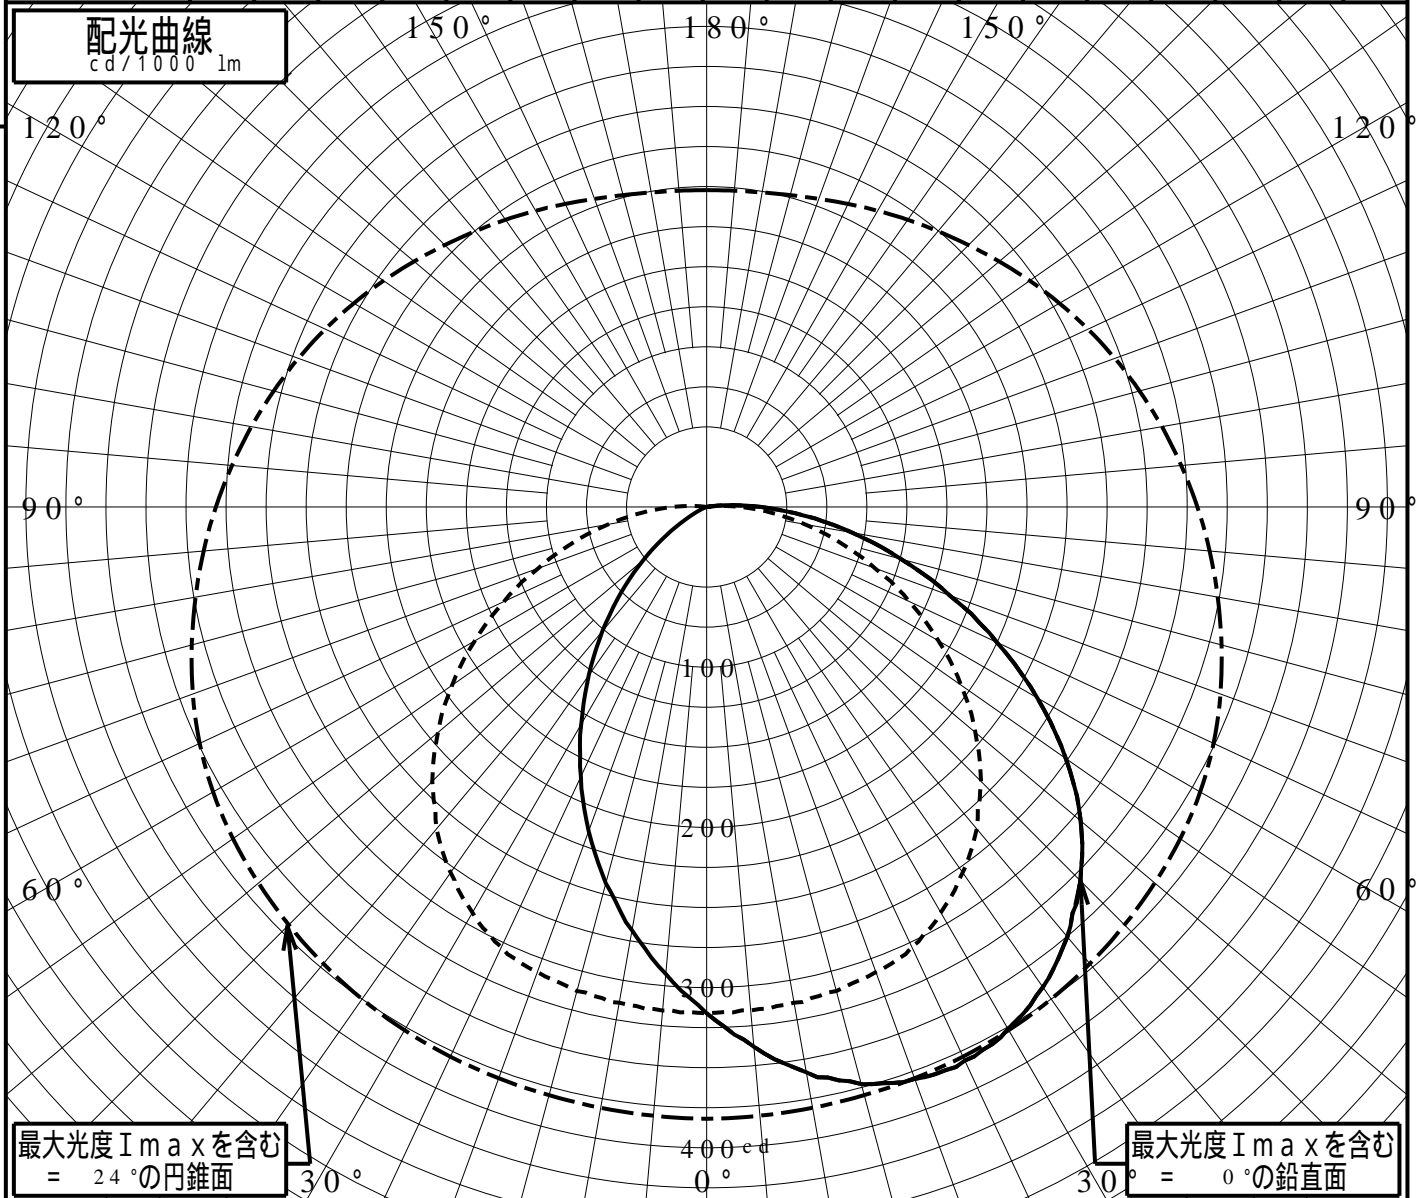

正弦等光度曲線

品番(品名)	NNY2 2 3 5 2 + YK3 4 0 5 0	光源	LED5000_70_1590 ×1
管理番号	K0167584(0)DB 1		

