


屋外照明器具特性

品番(品名)	NNY2 2 3 6 0 + YK3 4 0 5 0																			
光源	LED5000_70_7760 ×1 7760.0 lm																			
管理番号	K0153860(0)DB1																			
JISC8131-1999 による配光形式																				
器具効率	100.0%					直下光度	390.8 cd/1000lm													
上方光束	0.0%					最大光度	770.3 cd/1000lm													
下方光束	99.9%																			
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	
=0°鉛直面	390	394	593	572	448	322	298	342	367	377	343	248	111	49	25	15	7	0	0	
90°	390	380	377	366	354	338	341	341	339	370	476	515	483	335	158	41	7	0	0	
180°	390	363	326	268	197	44	17	12	9	7	0	0	0	0	0	0	0	0	0	
270°	390	380	377	366	354	338	341	341	339	370	476	515	483	335	158	41	7	0	0	
I _{max} を含む鉛直面	390	381	380	369	362	368	404	440	473	546	687	767	741	539	211	49	11	0	0	

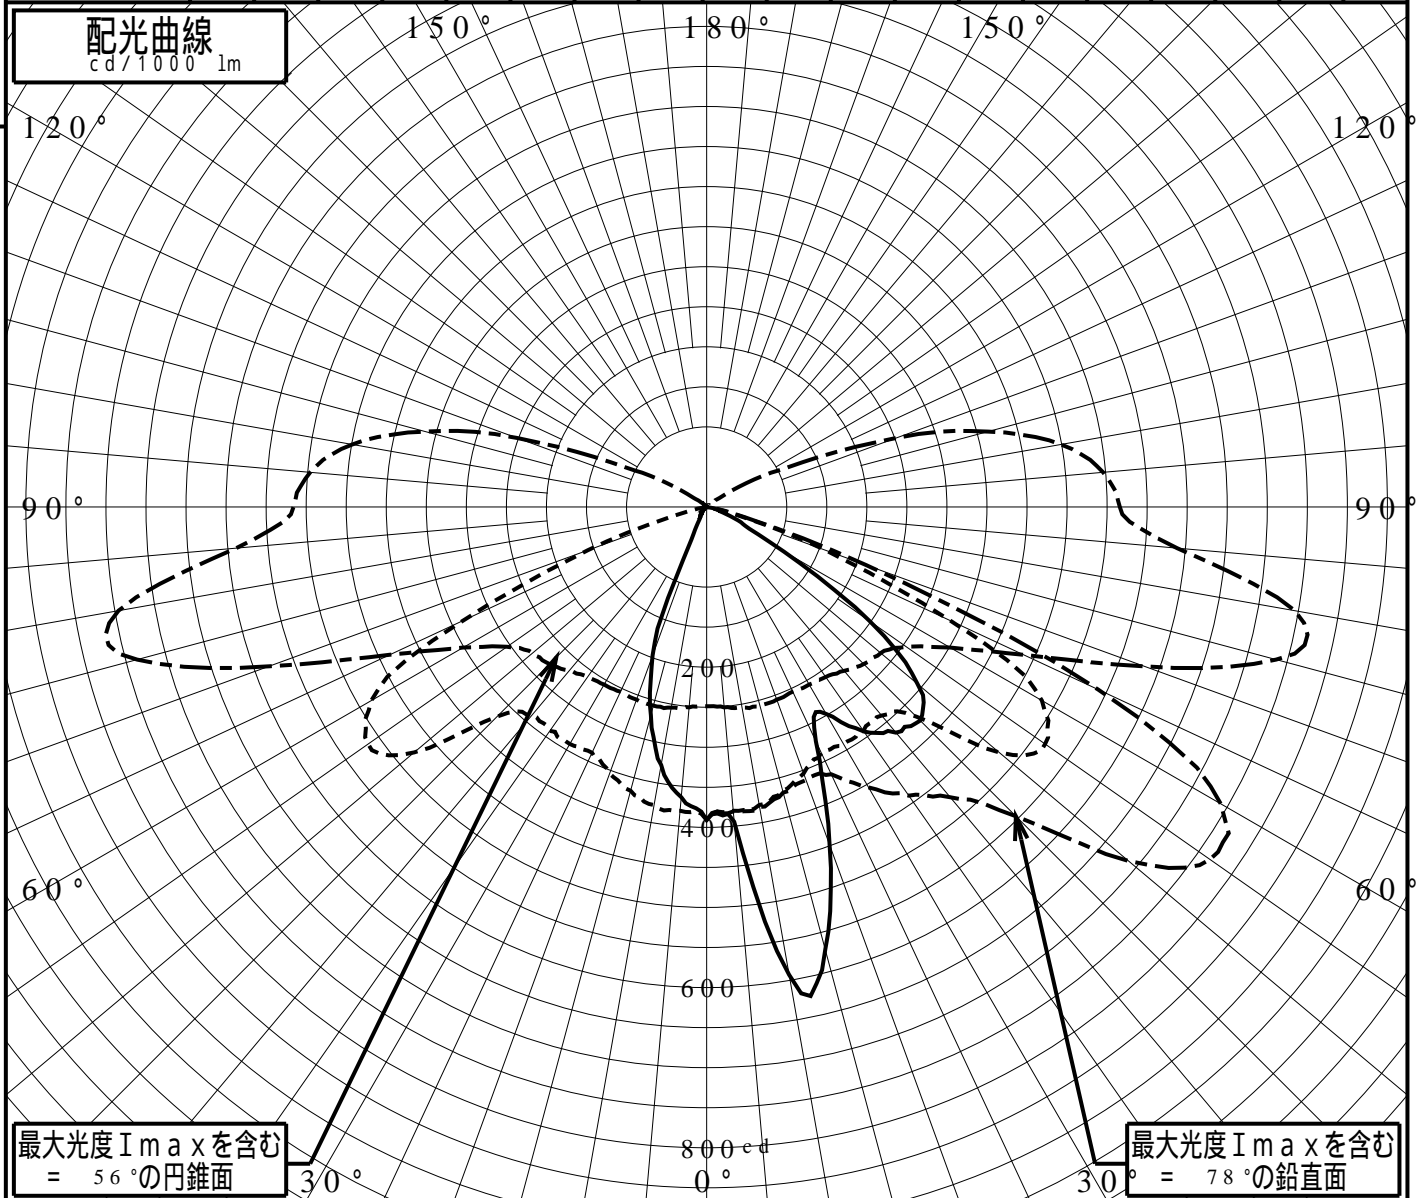

正弦等光度曲線

品番(品名)	NNY2 2 3 6 0 + YK3 4 0 5 0	光源	LED5000_70_7760 ×1
管理番号	K0153860(0)DB 1		

