


# 投光照明器具特性



品名(品番)	NNY24920+NNY28477_0 DEG					
光源	LED5000_80_3820 x1      3820.0 lm					
管理番号	K0157158(0)DR1 TF					
配光の区分・種類	一面对称配光	主ビ-ム効率	%			
器具点灯角度		ビ-ム範囲	$I_{0/2}$	$I_{0/10}$	$I_{0/20}$	
器具効率	100.1 %	ビ-ム効率	65.0%	96.6%	98.9%	
最大光度	1613 cd/1000 lm	ビ-ム角	AA' 42.6 BB 68.2	70.2 105.6	76.1 108.9	

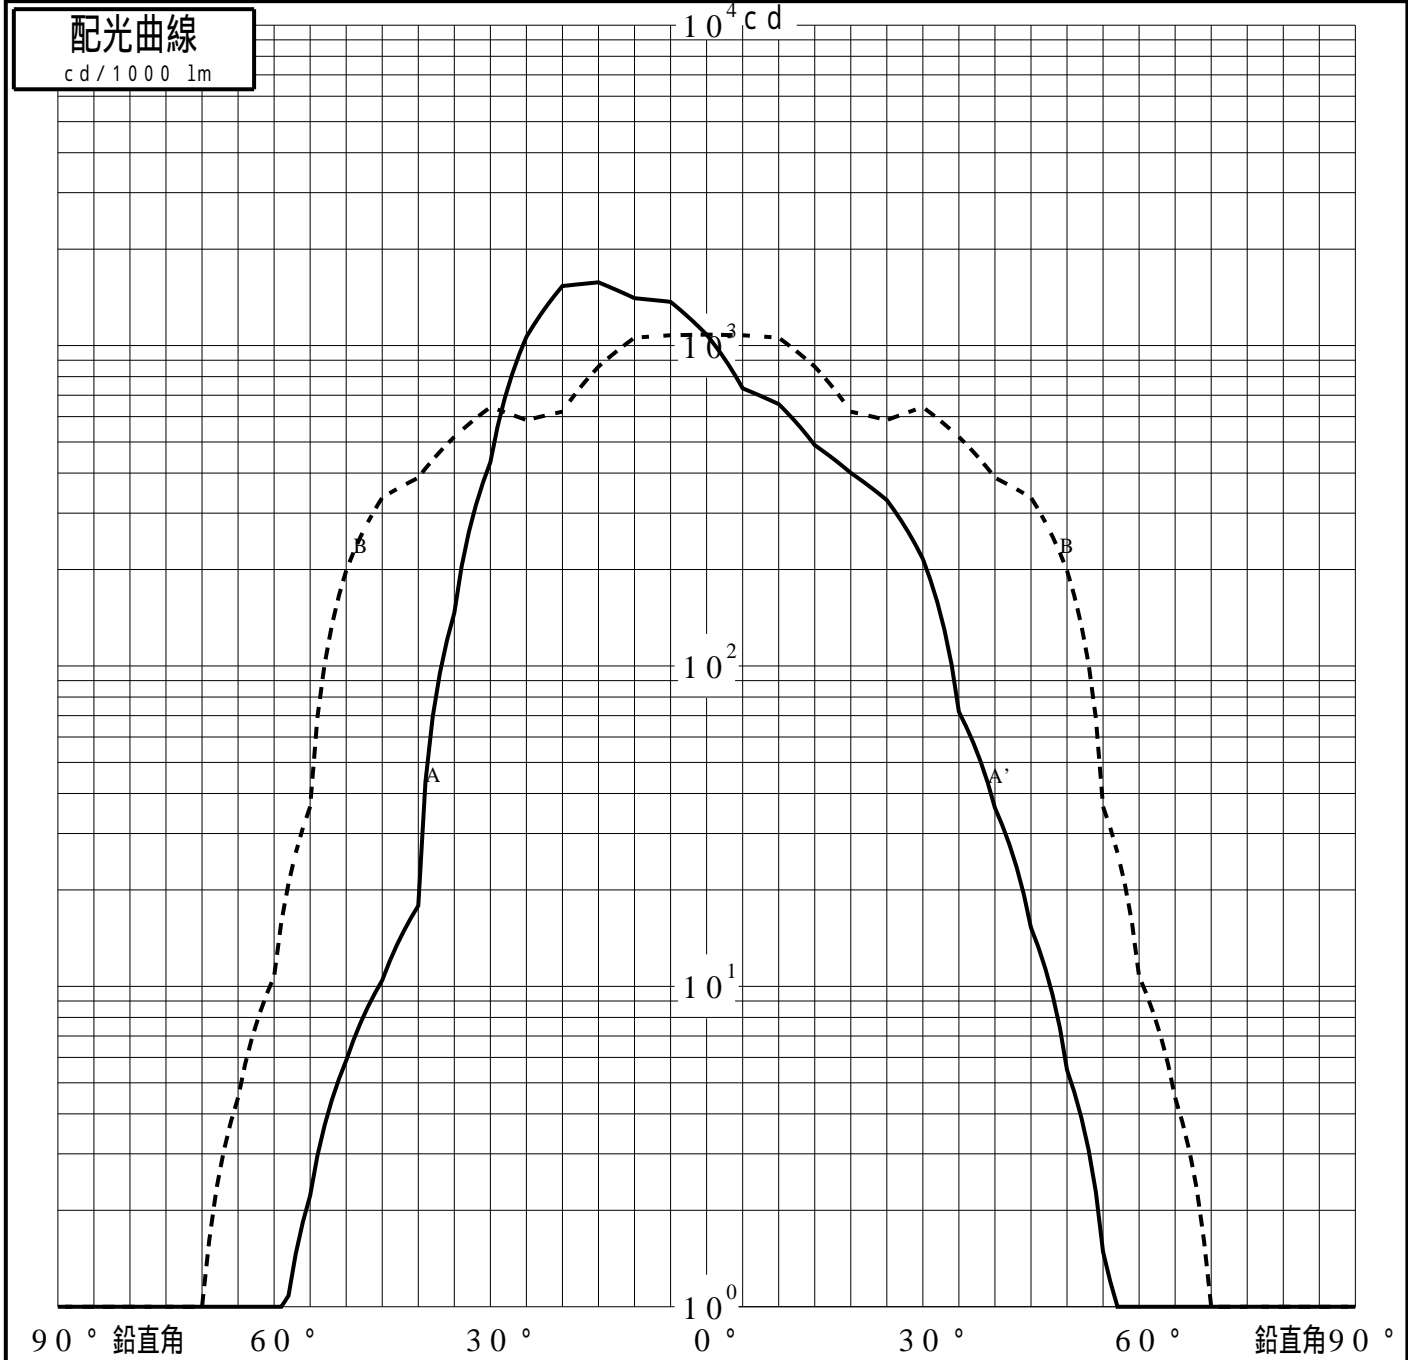

# 投光照明器具特性

品番 (品名)	NNY24920+NNY28477_0 DEG	光源	LED5000_80_3820 ×1
管理番号	K0157158(0) DR1 TF		

## 累積光束曲線

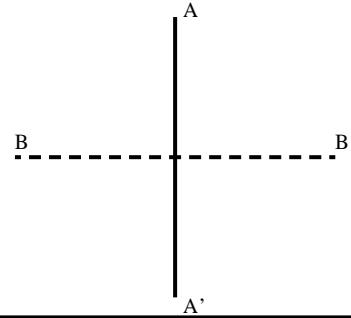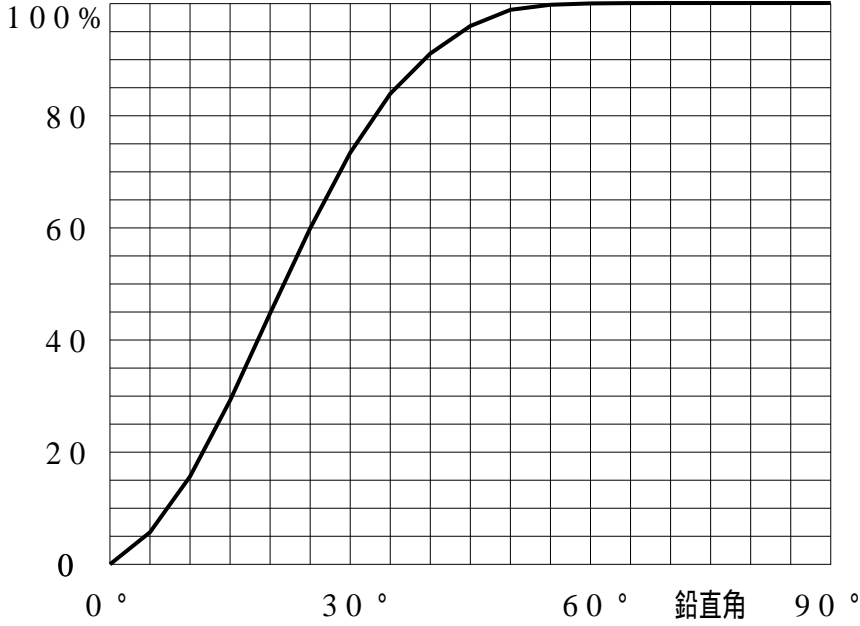

## 等光度曲線

(座標系)  
cd/1000 lm

