


屋外照明器具特性

| | | | |
|--------|---------------------|------------|--|
| 品番(品名) | NNY27830Z_0DEG | | |
| 光源 | LED5000_80_12000 ×1 | 12000.0 lm | |
| 管理番号 | K0143335(*)DR1 | | |

| | | | |
|--------------------------|---------|------|-----------------|
| JISC8131-1999 による配光形式 | CUT-OFF | | |
| 器具効率 | 100.0% | 直下光度 | 241.7 cd/1000lm |
| 上方光束 | 0.0% | 最大光度 | 993.7 cd/1000lm |
| 下方光束 | 100.0% | | |



| 鉛直角 | 0° | 5° | 10° | 15° | 20° | 25° | 30° | 35° | 40° | 45° | 50° | 55° | 60° | 65° | 70° | 75° | 80° | 85° | 90° |
|-------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| =0°鉛直面 | 241 | 274 | 315 | 356 | 463 | 740 | 868 | 563 | 227 | 99 | 63 | 49 | 42 | 32 | 20 | 17 | 2 | 0 | 0 |
| 90° | 241 | 240 | 235 | 239 | 253 | 261 | 268 | 275 | 279 | 279 | 274 | 264 | 258 | 233 | 181 | 80 | 10 | 0 | 0 |
| 180° | 241 | 205 | 167 | 143 | 121 | 103 | 96 | 88 | 82 | 82 | 86 | 76 | 65 | 39 | 26 | 14 | 1 | 0 | 0 |
| 270° | 241 | 240 | 235 | 240 | 253 | 262 | 269 | 276 | 281 | 280 | 275 | 266 | 260 | 235 | 183 | 78 | 10 | 0 | 0 |
| I _{max} を含む鉛直面 | 241 | 255 | 270 | 294 | 328 | 364 | 420 | 514 | 697 | 926 | 983 | 765 | 444 | 191 | 73 | 32 | 7 | 0 | 0 |

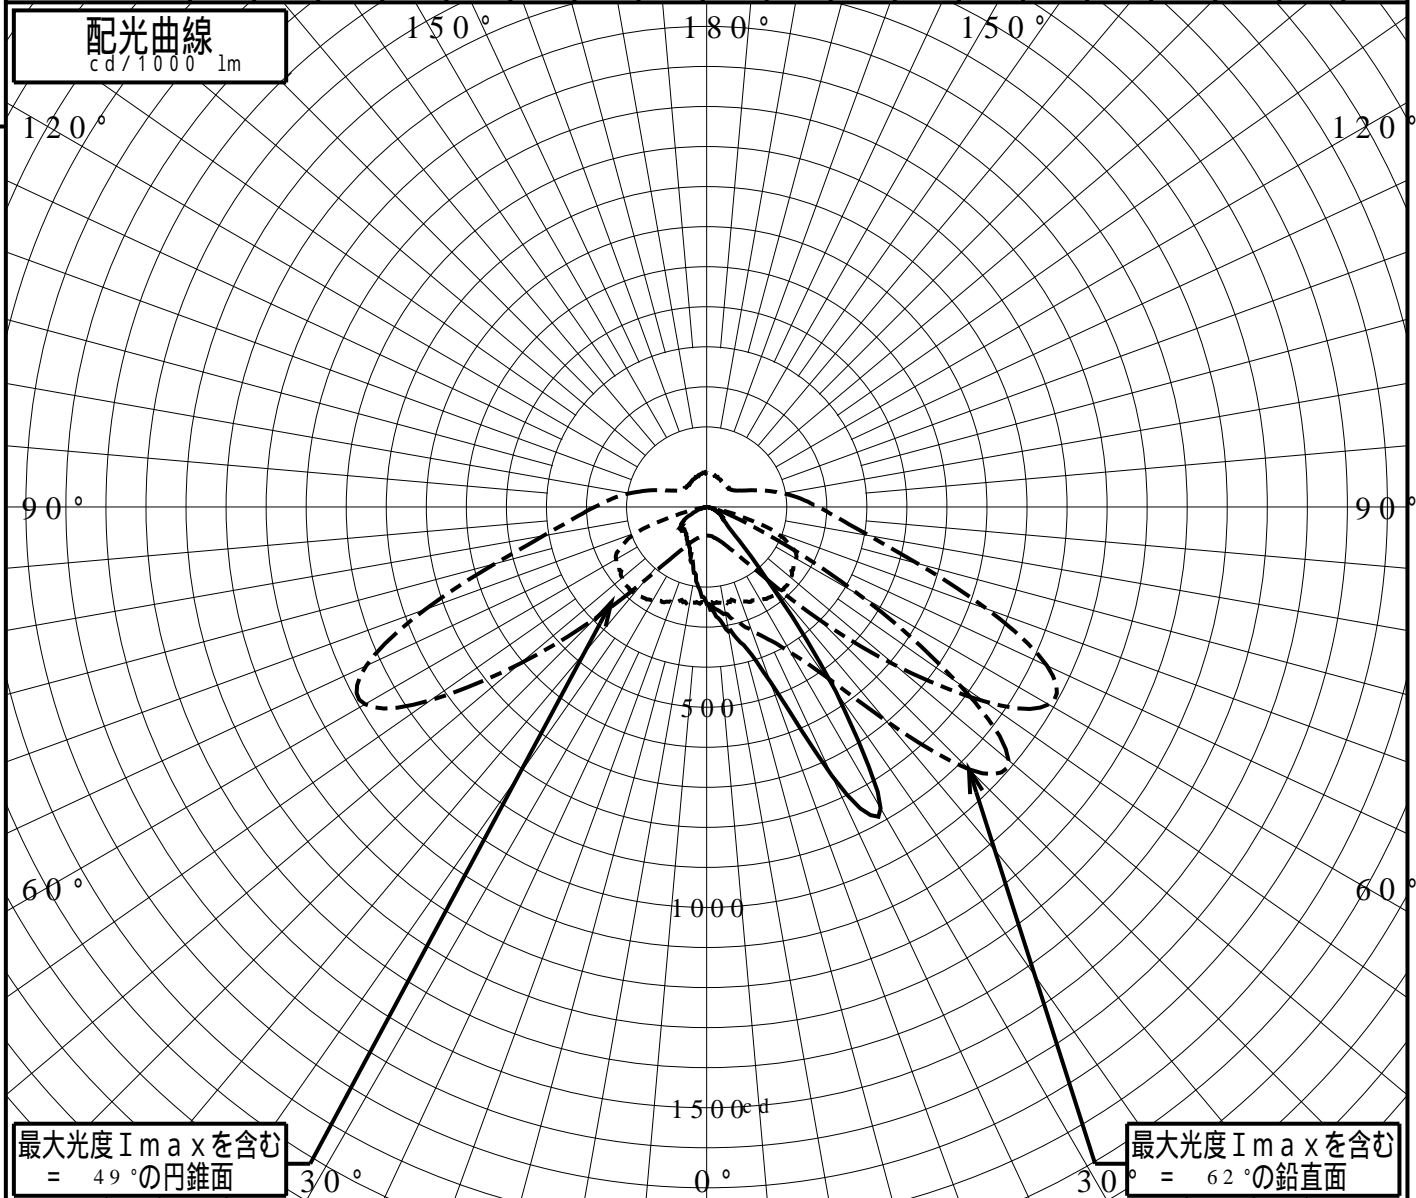

道路・トンネル照明率曲線

品番(品名)

NNY27830Z_0DEG

光源

LED5000_80_12000 x1


管理番号

K0143335 (*)DR 1

————— = 0.0°

H: 取付高さ(MOUNTING HEIGHT)


| 照明率(= 0°) | | |
|------------|-------|-------|
| 幅 | 歩道側 | 車道側 |
| 0.0H | 0.000 | 0.000 |
| 0.2H | 0.082 | 0.115 |
| 0.4H | 0.130 | 0.278 |
| 0.6H | 0.157 | 0.537 |
| 0.8H | 0.176 | 0.689 |
| 1.0H | 0.189 | 0.732 |
| 1.2H | 0.200 | 0.747 |
| 1.4H | 0.208 | 0.755 |
| 1.6H | 0.214 | 0.760 |
| 1.8H | 0.218 | 0.764 |
| 2.0H | 0.221 | 0.766 |
| 2.2H | 0.223 | 0.768 |
| 2.4H | 0.224 | 0.770 |
| 2.6H | 0.225 | 0.771 |
| 2.8H | 0.226 | 0.772 |
| 3.0H | 0.227 | 0.772 |
| 3.2H | 0.227 | 0.773 |
| 3.4H | 0.228 | 0.773 |
| 3.6H | 0.228 | 0.773 |

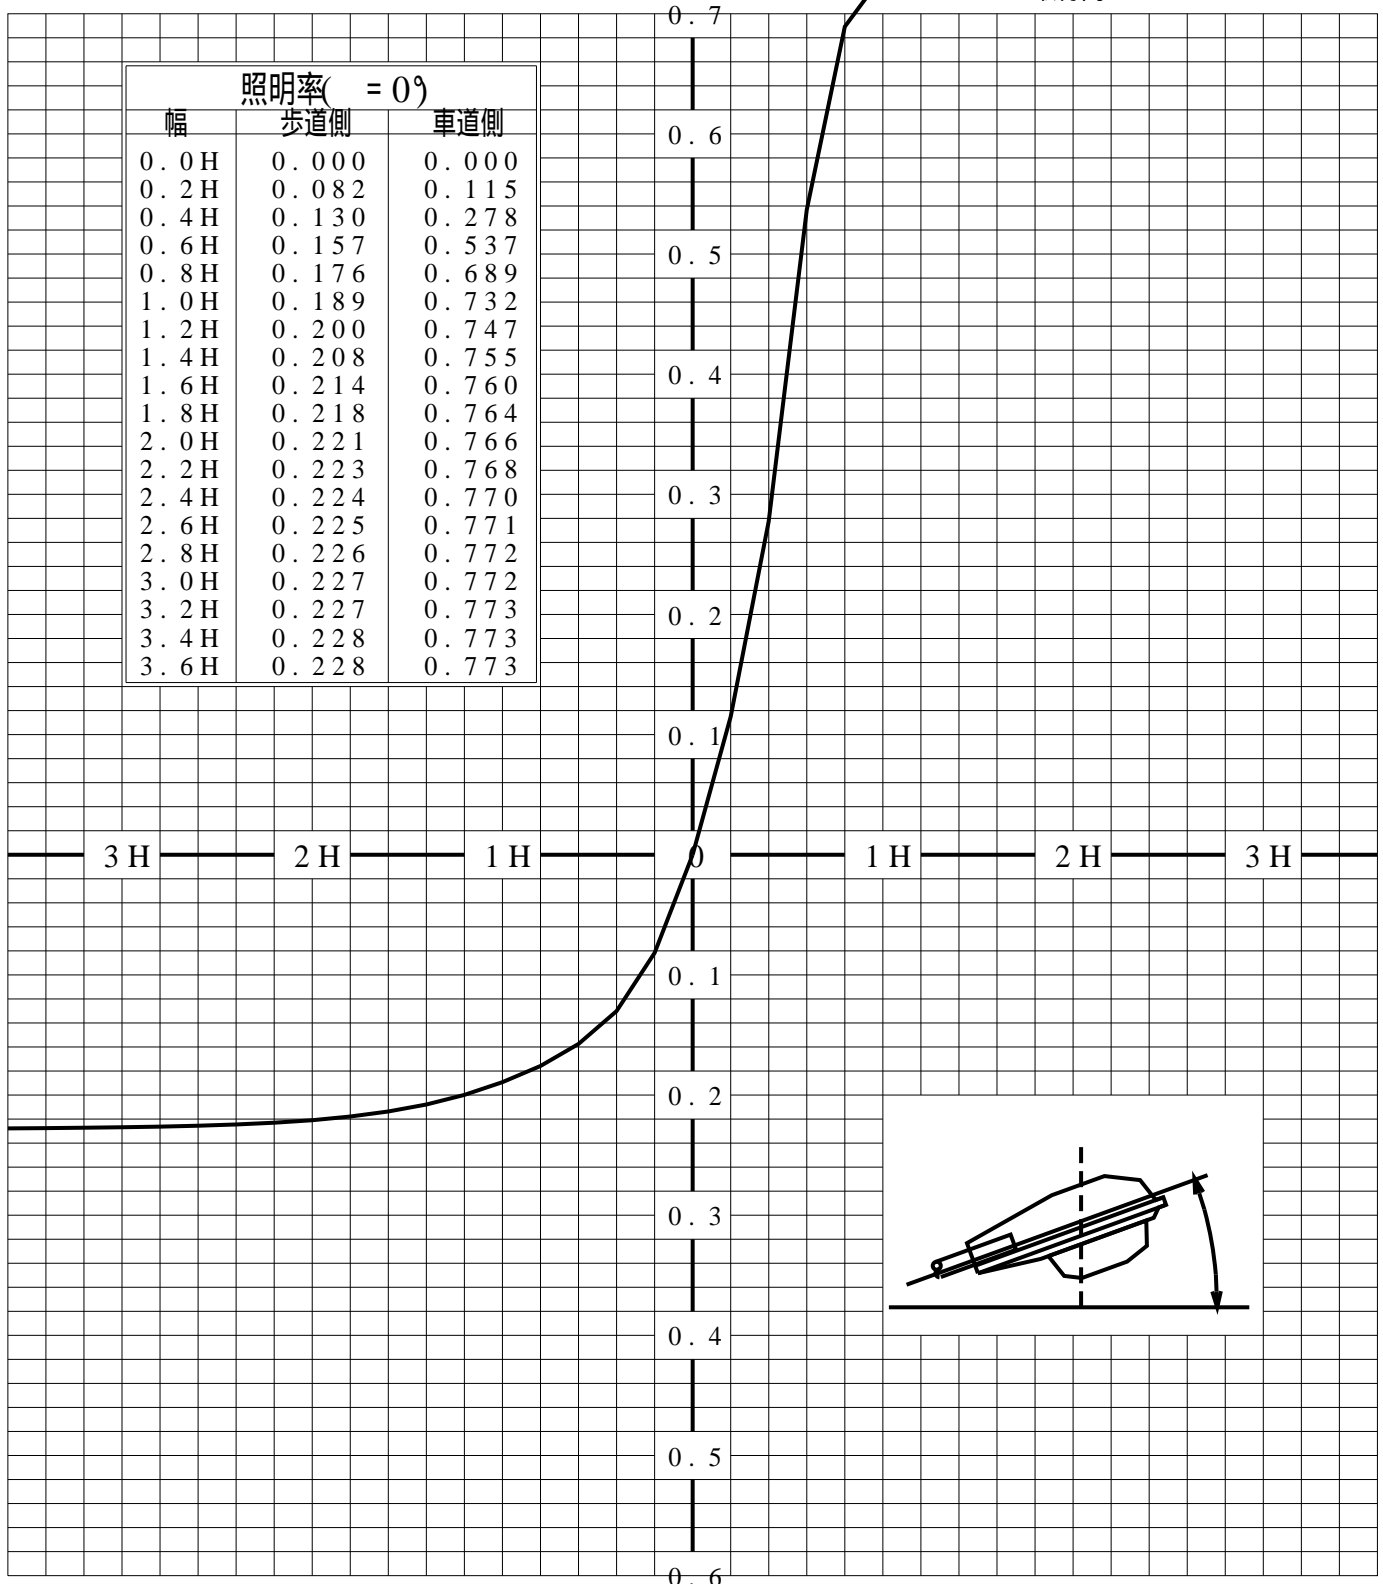

歩道側 ← → 車道側

正弦等光度曲線

| | | | |
|--------|-----------------|----|---------------------|
| 品番(品名) | NNY27830Z_0 DEG | 光源 | LED5000_80_12000 x1 |
| 管理番号 | K0143335(*)DR 1 | | |

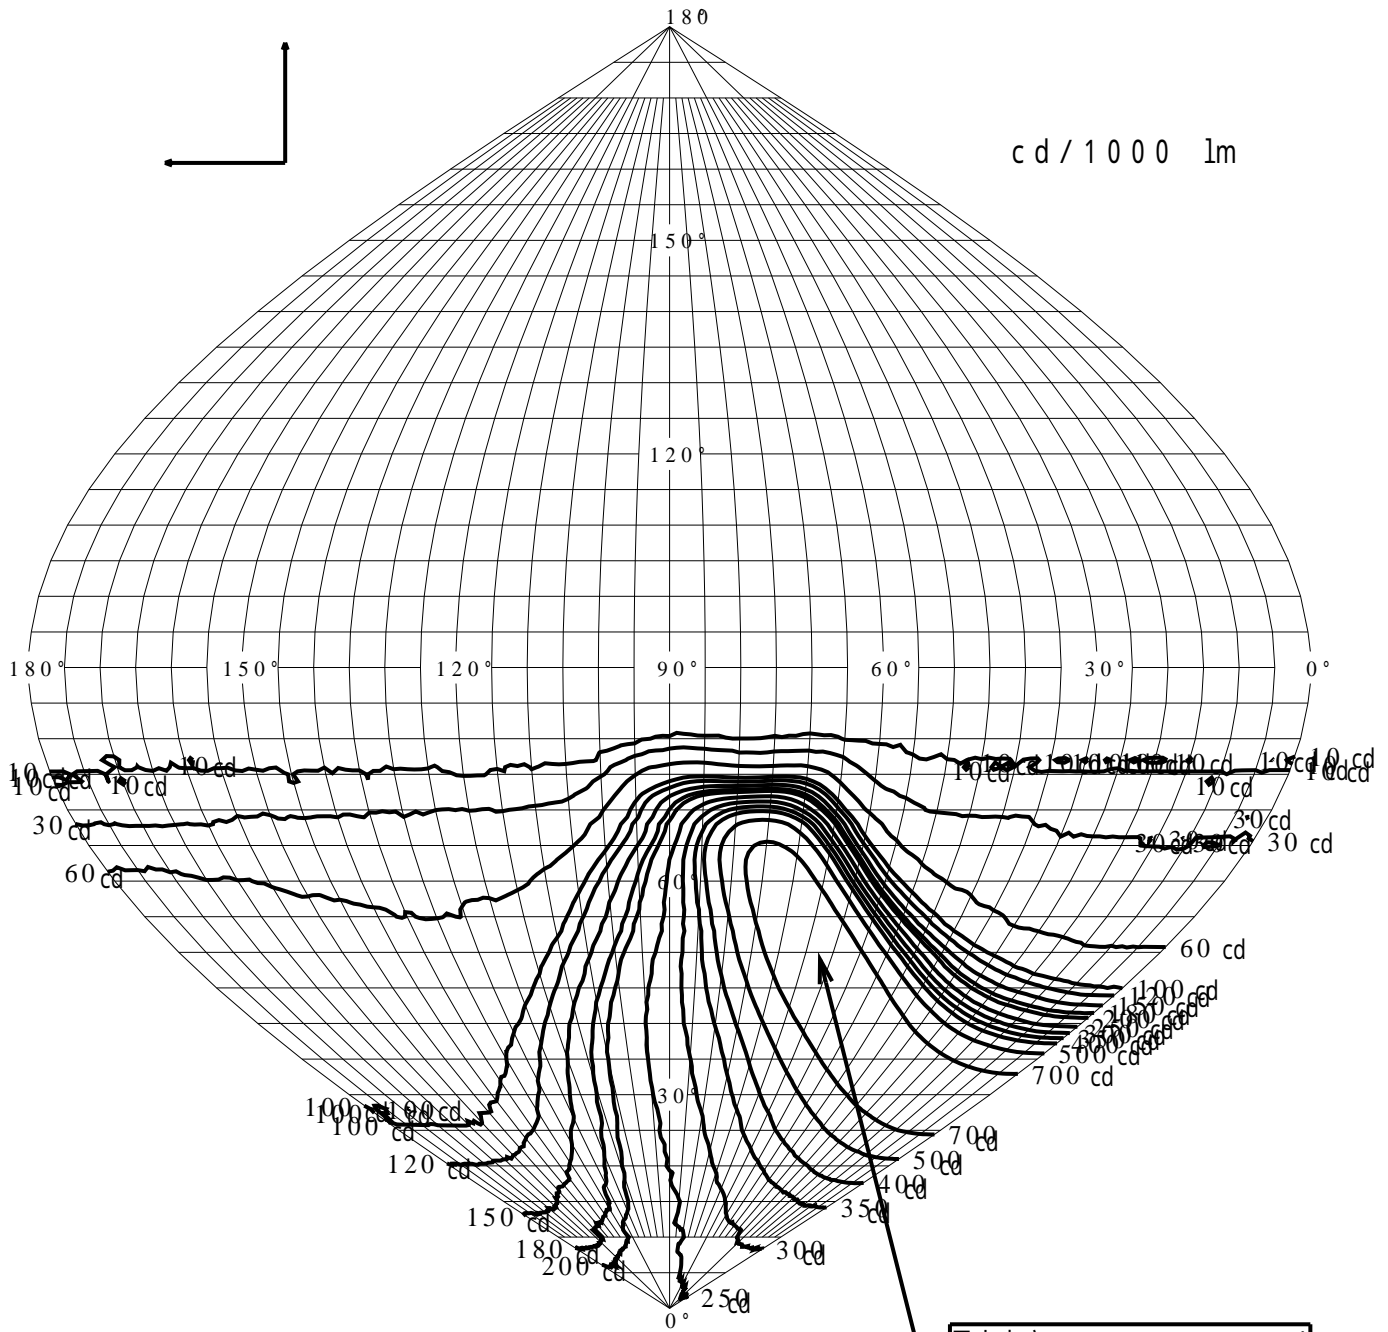

最大光度 I_{max} 993.7 cd

直下光度 I_0 241.7 cd

