


投光照明器具特性

品名(品番)	NS N07082B+NNN89052	
光源	LED3500_70_3030 x1	3030.0 lm
管理番号	K0171847(0)DJ1 XY	


配光の区分・種類	非対称配光	主ビ-ム効率	%			
器具点灯角度		ビ-ム範囲	$I_0 / 2$	$I_0 / 10$	$I_0 / 20$	
器具効率	100.0 %	ビ-ム効率	52.7%	89.0%	94.7%	
最大光度	976 cd/1000 lm	ビ-ム角	AA' 38.9 BB' 75.3	74.6 124.1	98.1 138.4	

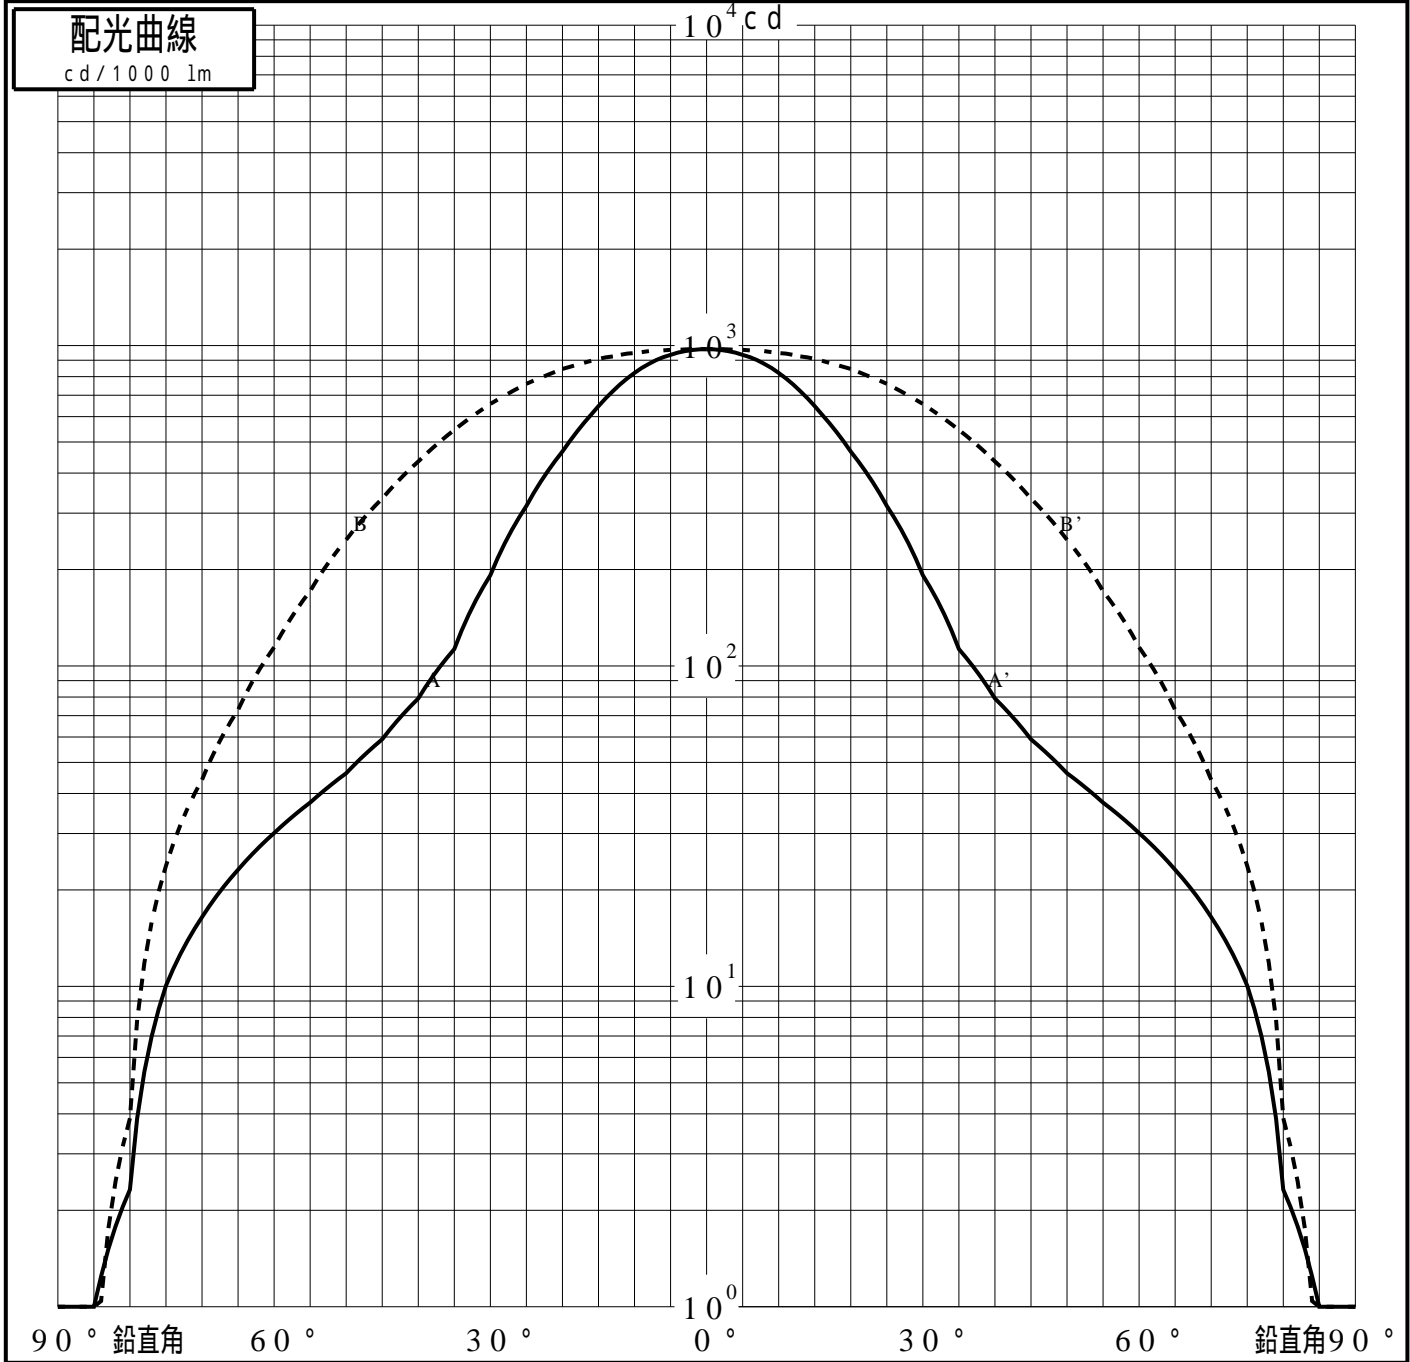

投光照明器具特性

品番(品名)	NSN07082B+NNN89052	光源	LED3500_70_3030 ×1
管理番号	K0171847(0)DJ1 XY		

累積光束曲線

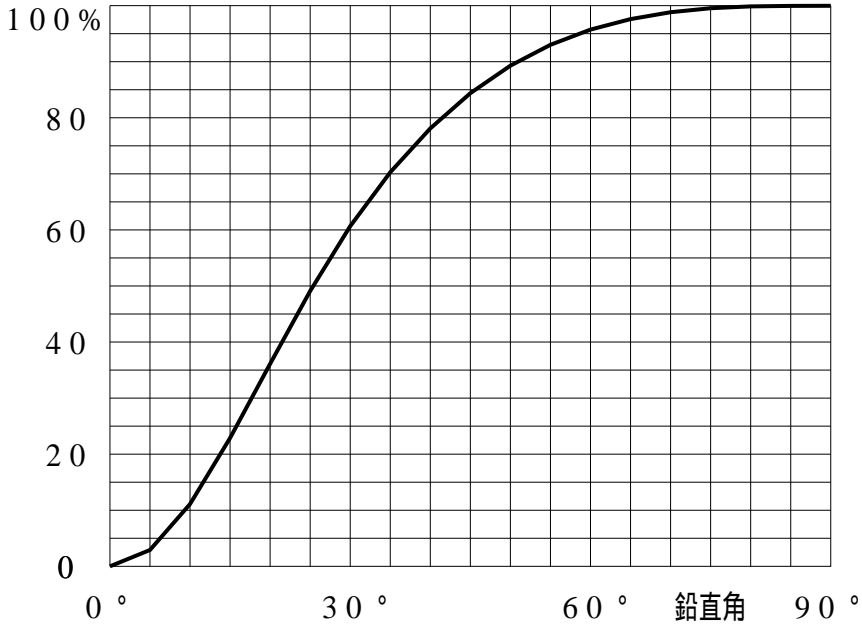

等光度曲線

(座標系)
cd/1000 lm

