


# 投光照明器具特性

品名(品番)	NS N07092 W+ NNN89052	
光源	LED9999_70_2145 ×1	2145.0 lm
管理番号	K0171894(0)DJ1 XY	


配光の区分・種類	非対称配光	主ビ-ム効率	%		
器具点灯角度		ビ-ム範囲	$I_0 / 2$	$I_0 / 10$	$I_0 / 20$
器具効率	100.0 %	ビ-ム効率	52.9%	88.8%	94.6%
最大光度	984 cd/1000 lm	ビ-ム角	AA' 38.5	74.5	97.9
			BB' 75.3	123.9	138.3

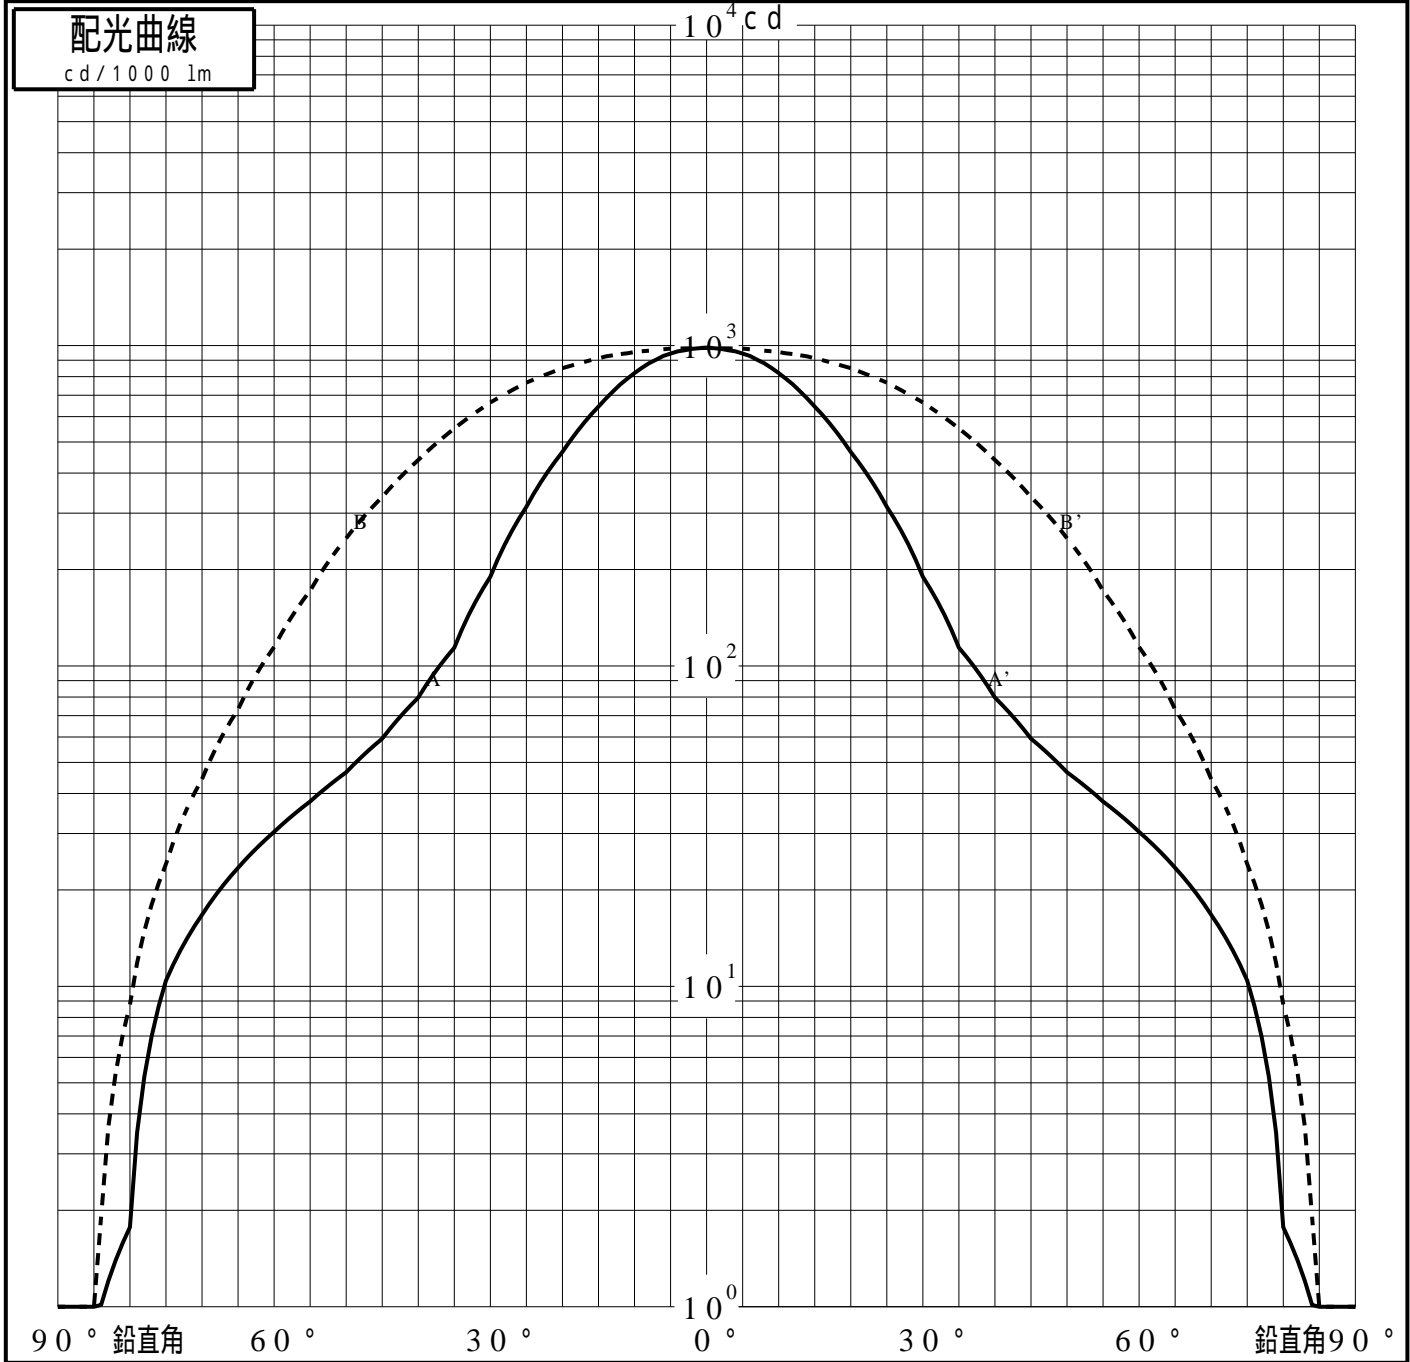

# 投光照明器具特性

品番 (品名)	NS N07092W+ NNN89052	光源	LED9999_70_2145 ×1
管理番号	K0171894(0)DJ1 XY		

## 累積光束曲線

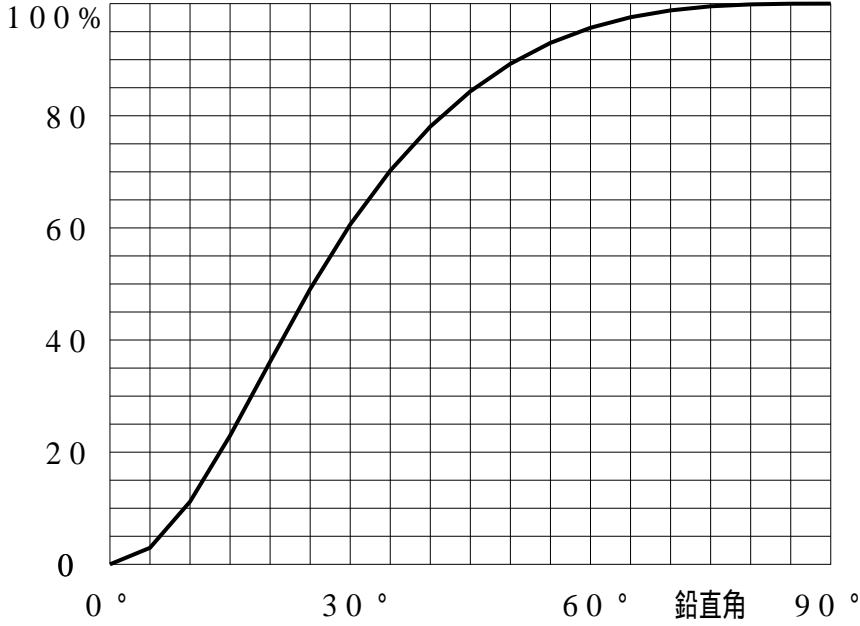

## 等光度曲線

(座標系)  
cd/1000 lm

