
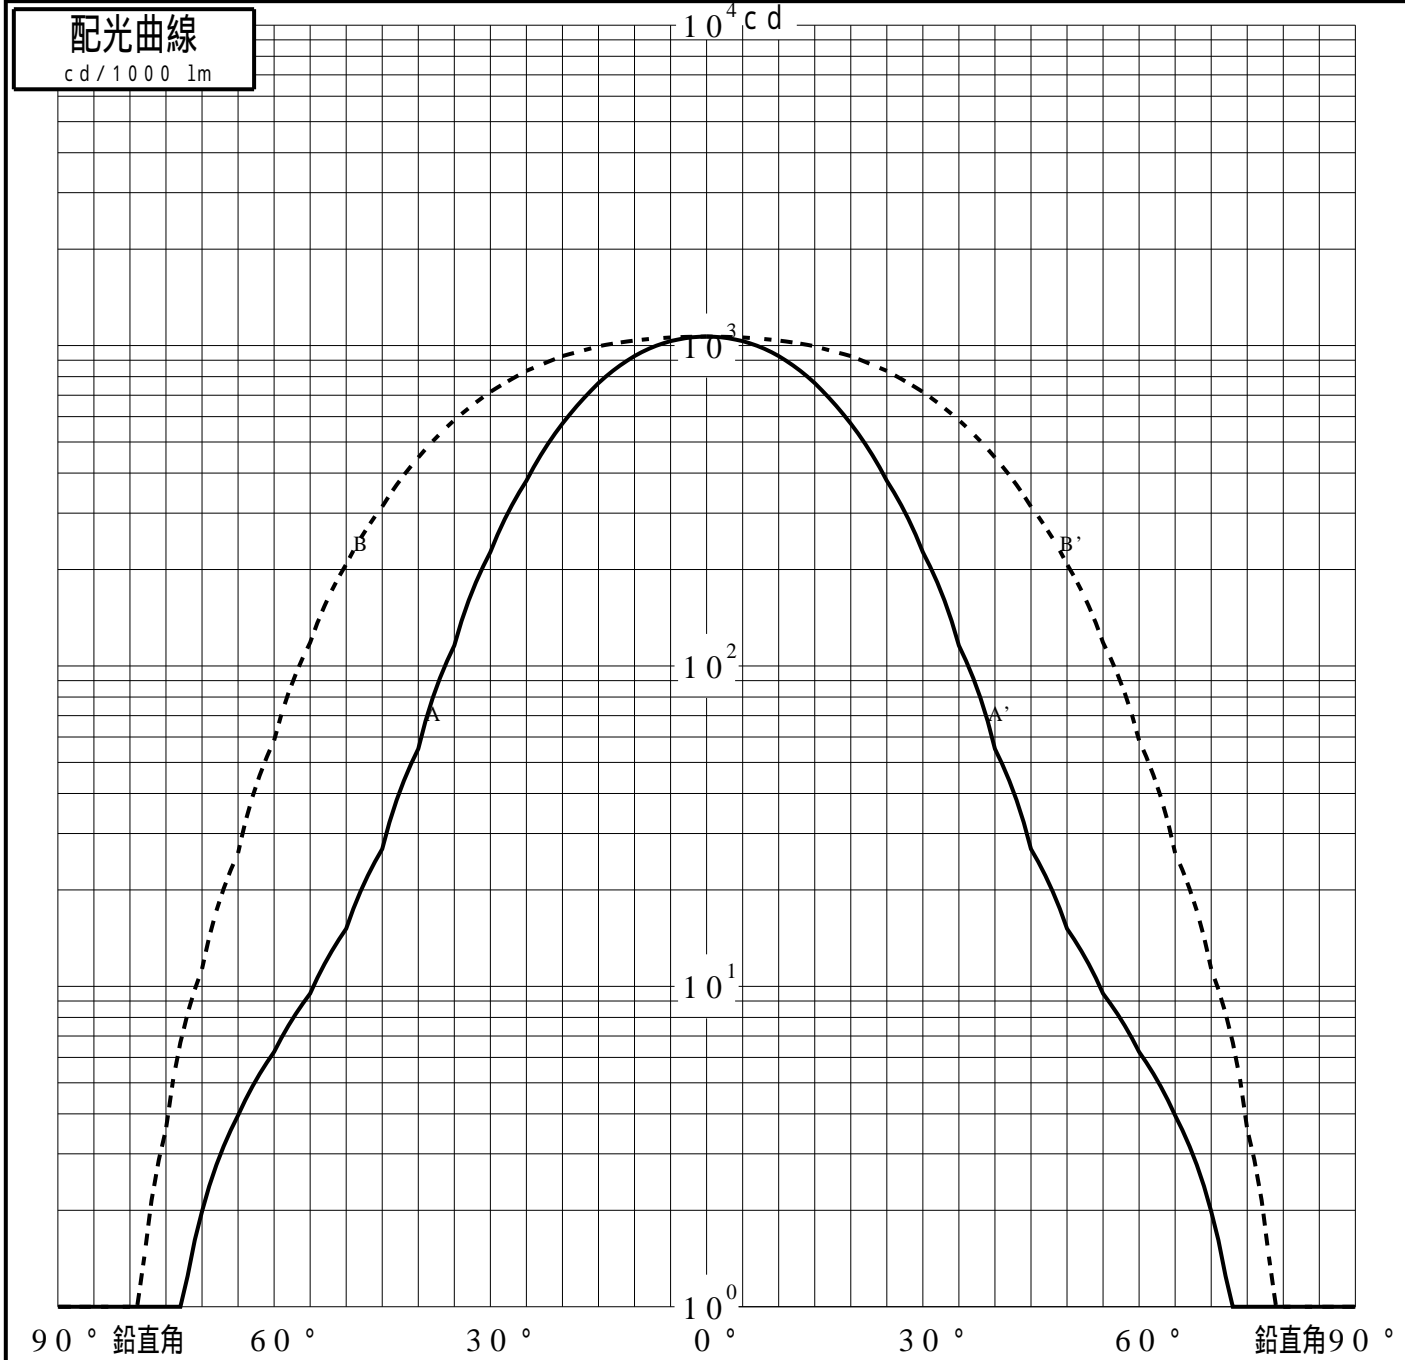


投光照明器具特性

品名(品番)	NTS01595B(45 DEG) + NTS9103		
光源	LED4000_70_905 ×1	905.0 lm	
管理番号	K0185336(0)DJ1 XY		



配光の区分・種類	非対称配光	主ビ-ム効率	%		
器具点灯角度		ビ-ム範囲	$I_{0/2}$	$I_{0/10}$	$I_{0/20}$
器具効率	100.0 %	ビ-ム効率	60.8%	93.5%	96.7%
最大光度	1067 cd/1000 lm	ビ-ム角	AA' 41.9	71.5	80.6
			BB' 73.7	111.9	121.6

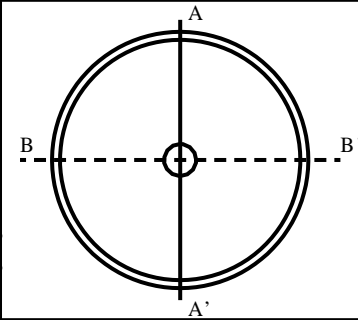

投光照明器具特性

品番 (品名)	NTS01595B(45 DEG) + NTS9103	光源	LED4000_70_905 ×1
管理番号	K0185336(0) DJ1 XY		

累積光束曲線

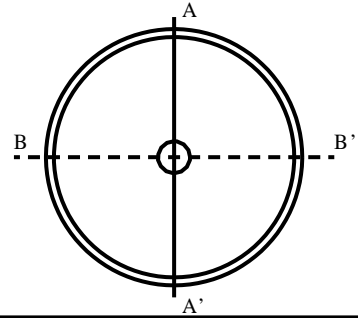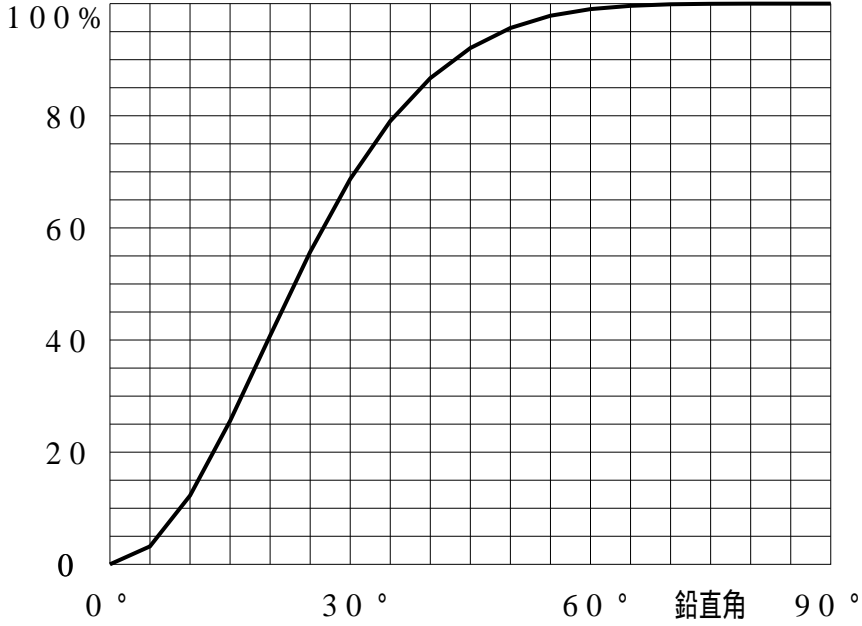

等光度曲線

(座標系)
cd/1000 lm

