


# 投光照明器具特性

品名(品番)	NTS02501W+NTS91033(17DEG)	
光源	LED4000_70_1305 x1	1305.0 lm
管理番号	K0170863(0)DJ1 XY	



配光の区分・種類	非対称配光	主ビ-ム効率	%		
器具点灯角度		ビ-ム範囲	$I_0 / 2$	$I_0 / 10$	$I_0 / 20$
器具効率	100.0 %	ビ-ム効率	51.8%	85.3%	90.0%
最大光度	2670 cd/1000 lm	ビ-ム角	AA' 61.2 BB' 16.8	92.0 34.3	103.1 42.5

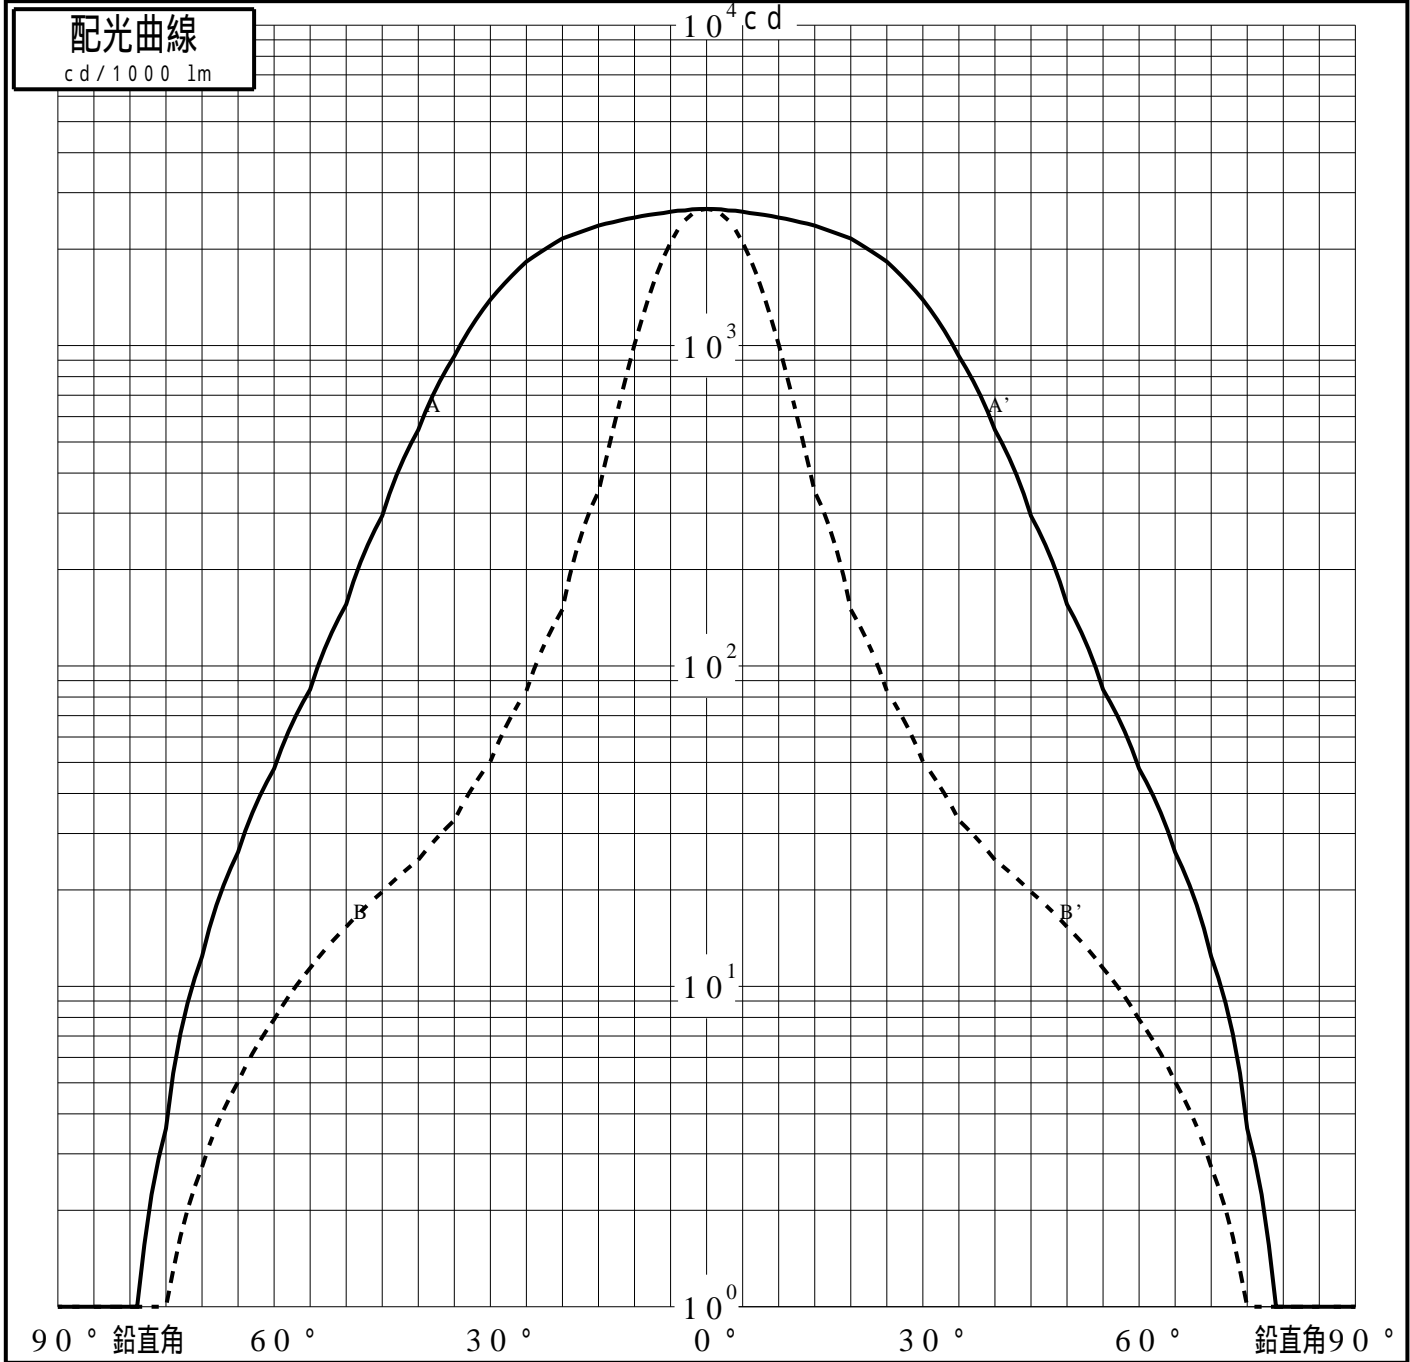

# 投光照明器具特性


品番 (品名)	NTS02501W+NTS91033(17DEG)	光源	LED4000_70_1305 ×1
管理番号	K0170863(0)DJ1 XY		

## 累積光束曲線

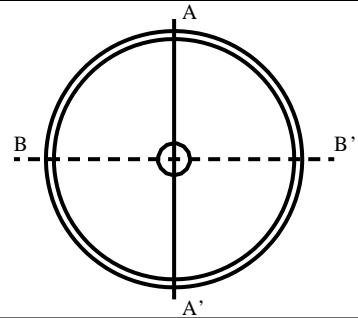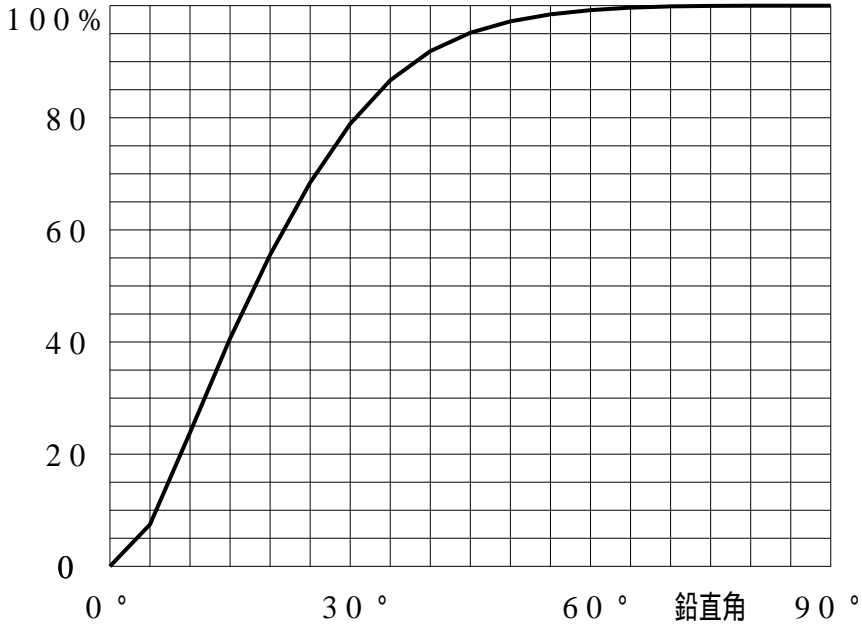

## 等光度曲線

(座標系)  
cd/1000 lm

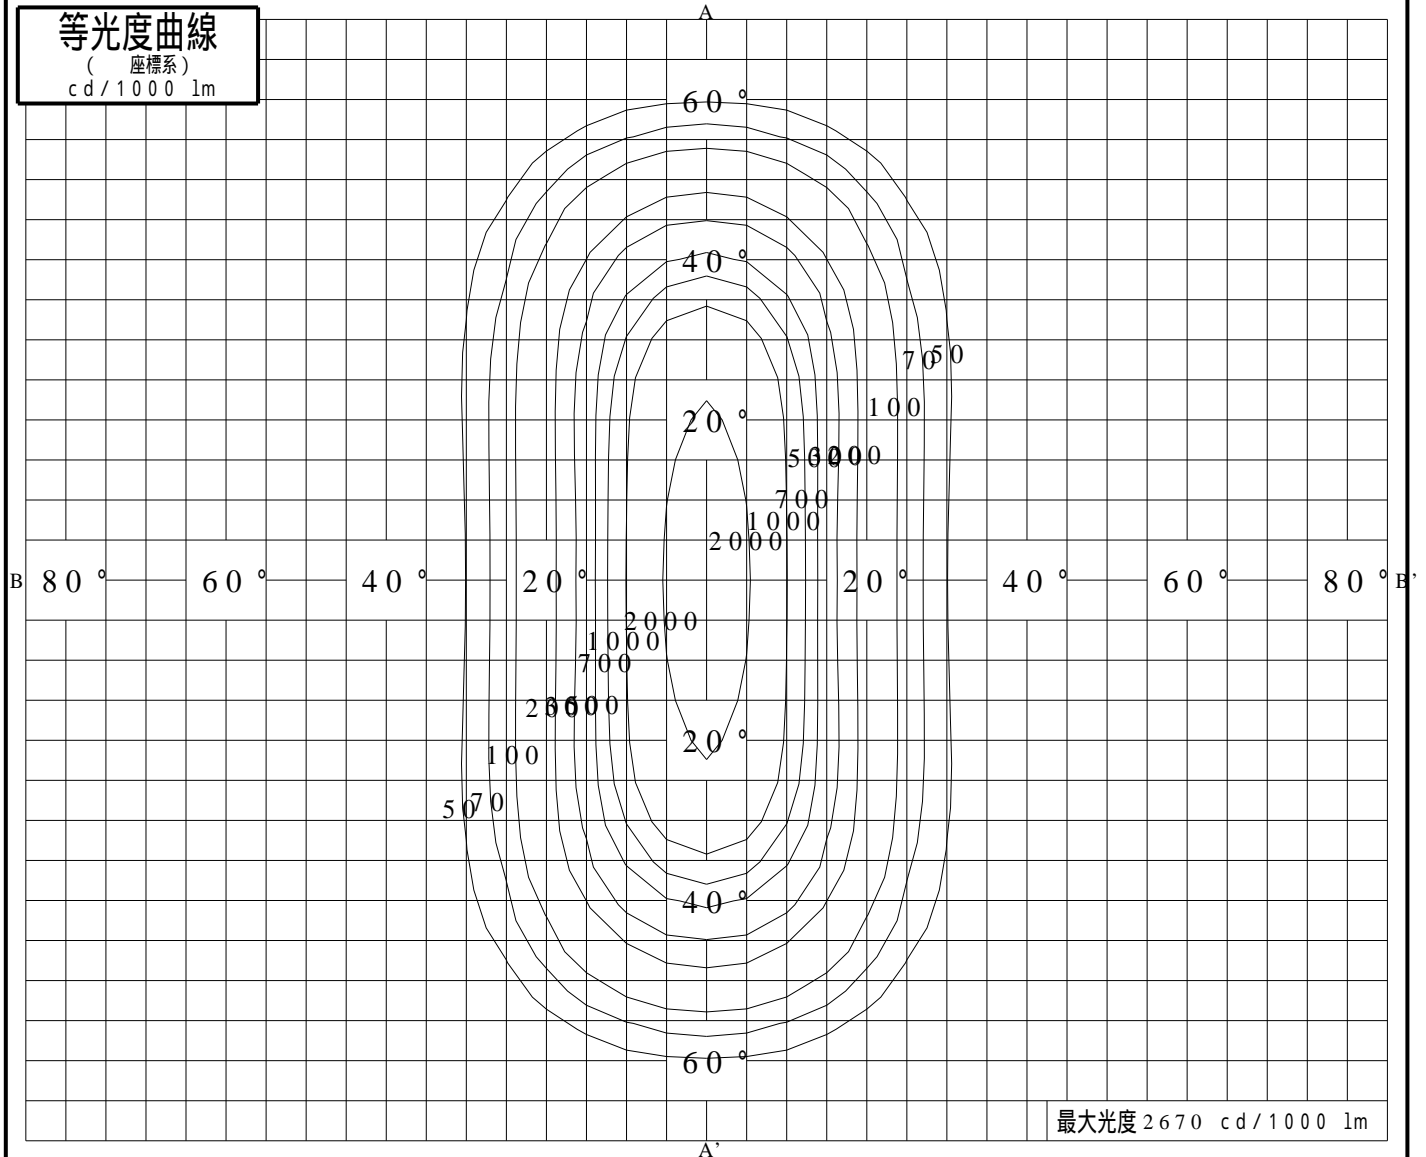

最大光度 2670 cd/1000 lm