


投光照明器具特性

品名(品番)	NTS02506W+NTS91031(21DEG)	
光源	LED4000_70_1225 x1	1225.0 lm
管理番号	K0170852(0)DJ1 TF	


配光の区分・種類	軸対称配光 中角形	主ビーム効率	89.9%		
器具点灯角度		ビーム範囲	$I_{0/2}$	$I_{0/10}$	$I_{0/20}$
器具効率	100.0%	ビーム効率	46.4%	80.3%	86.7%
最大光度	4468 cd/1000 lm	ビーム角	24.3	44.1	53.0

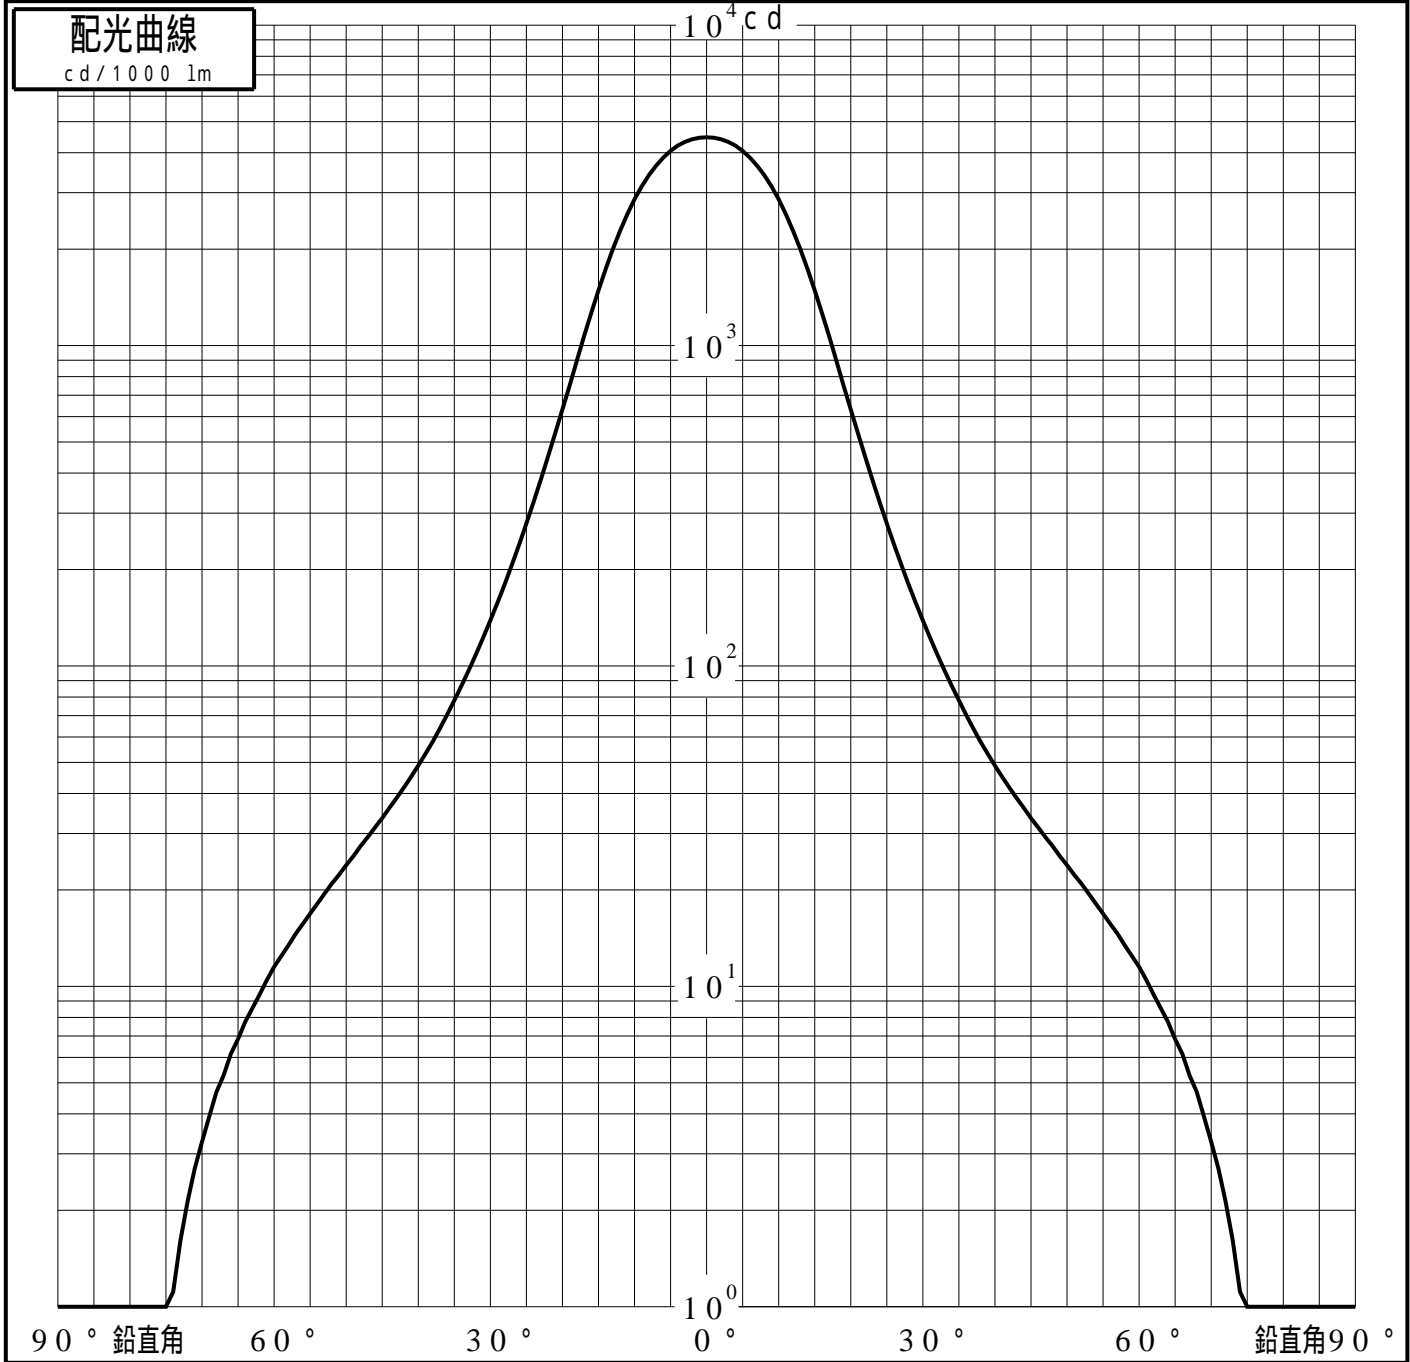

投光照明器具特性

品番 (品名)	NTS02506W+NTS91031(21 DEG	光源	LED4000_70_1225 ×1
管理番号	K0170852(0)DJ1 TF		

累積光束曲線

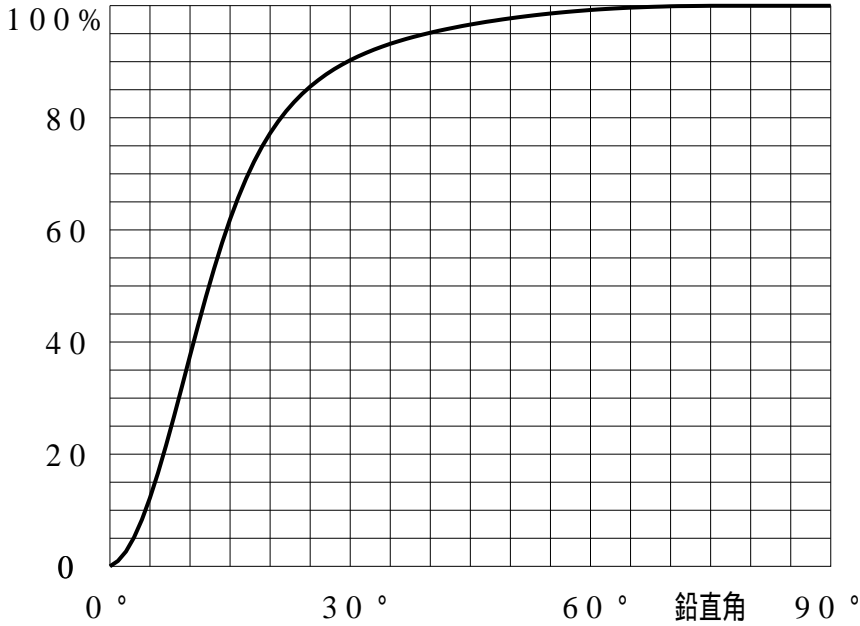

等光度曲線

(座標系)
cd/1000 lm

