


投光照明器具特性

品名(品番)	NTS03503W+NTS91033(17DEG)	
光源	LED3000_70_1800 x1	1800.0 lm
管理番号	K0170859(0)DJ1 XY	


配光の区分・種類	非対称配光	主ビ-ム効率	%		
器具点灯角度		ビ-ム範囲	$I_0 / 2$	$I_0 / 10$	$I_0 / 20$
器具効率	100.0 %	ビ-ム効率	51.9%	85.2%	89.9%
最大光度	2692 cd/1000 lm	ビ-ム角	AA' 60.8	91.7	102.7
			BB' 16.8	34.4	42.7

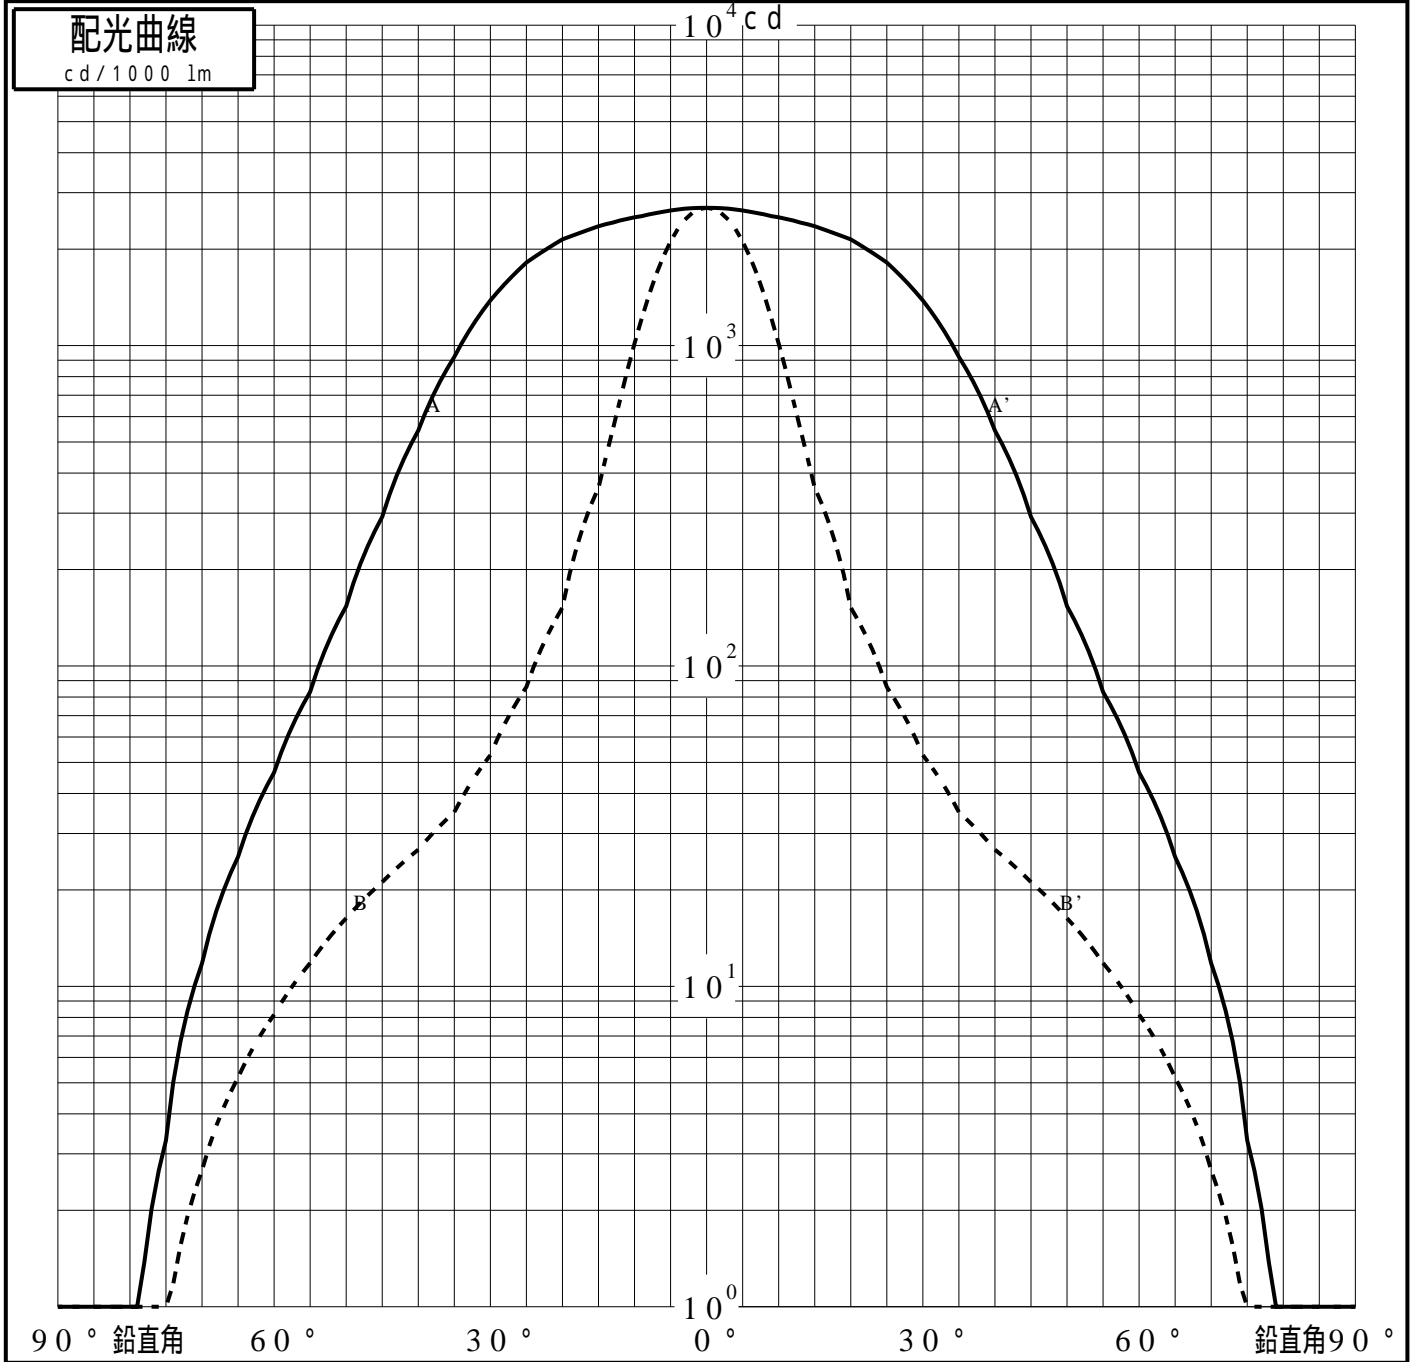

投光照明器具特性

品番 (品名)	NTS03503W+NTS91033(17DEG)	光源	LED3000_70_1800 ×1
管理番号	K0170859(0)DJ1 XY		

累積光束曲線

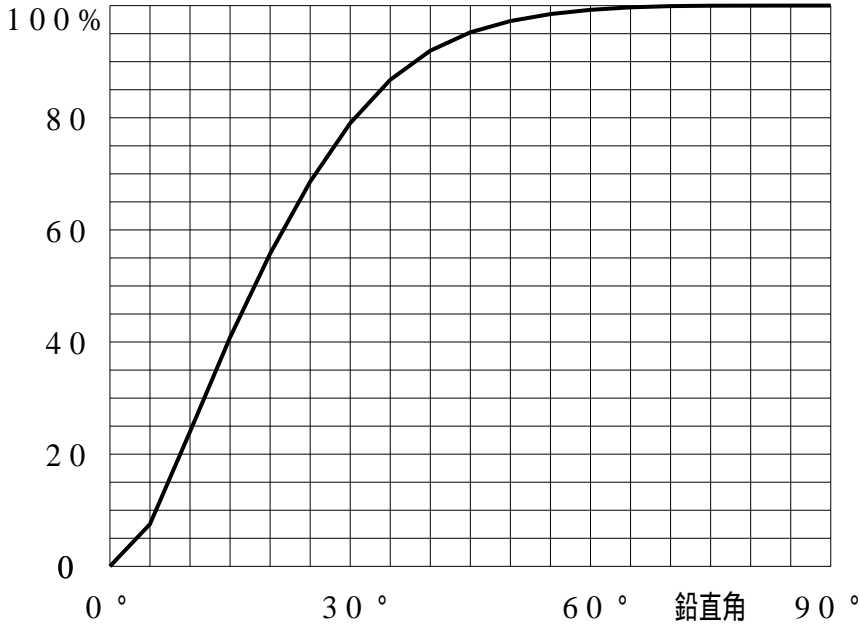

等光度曲線

(座標系)
cd/1000 lm

