


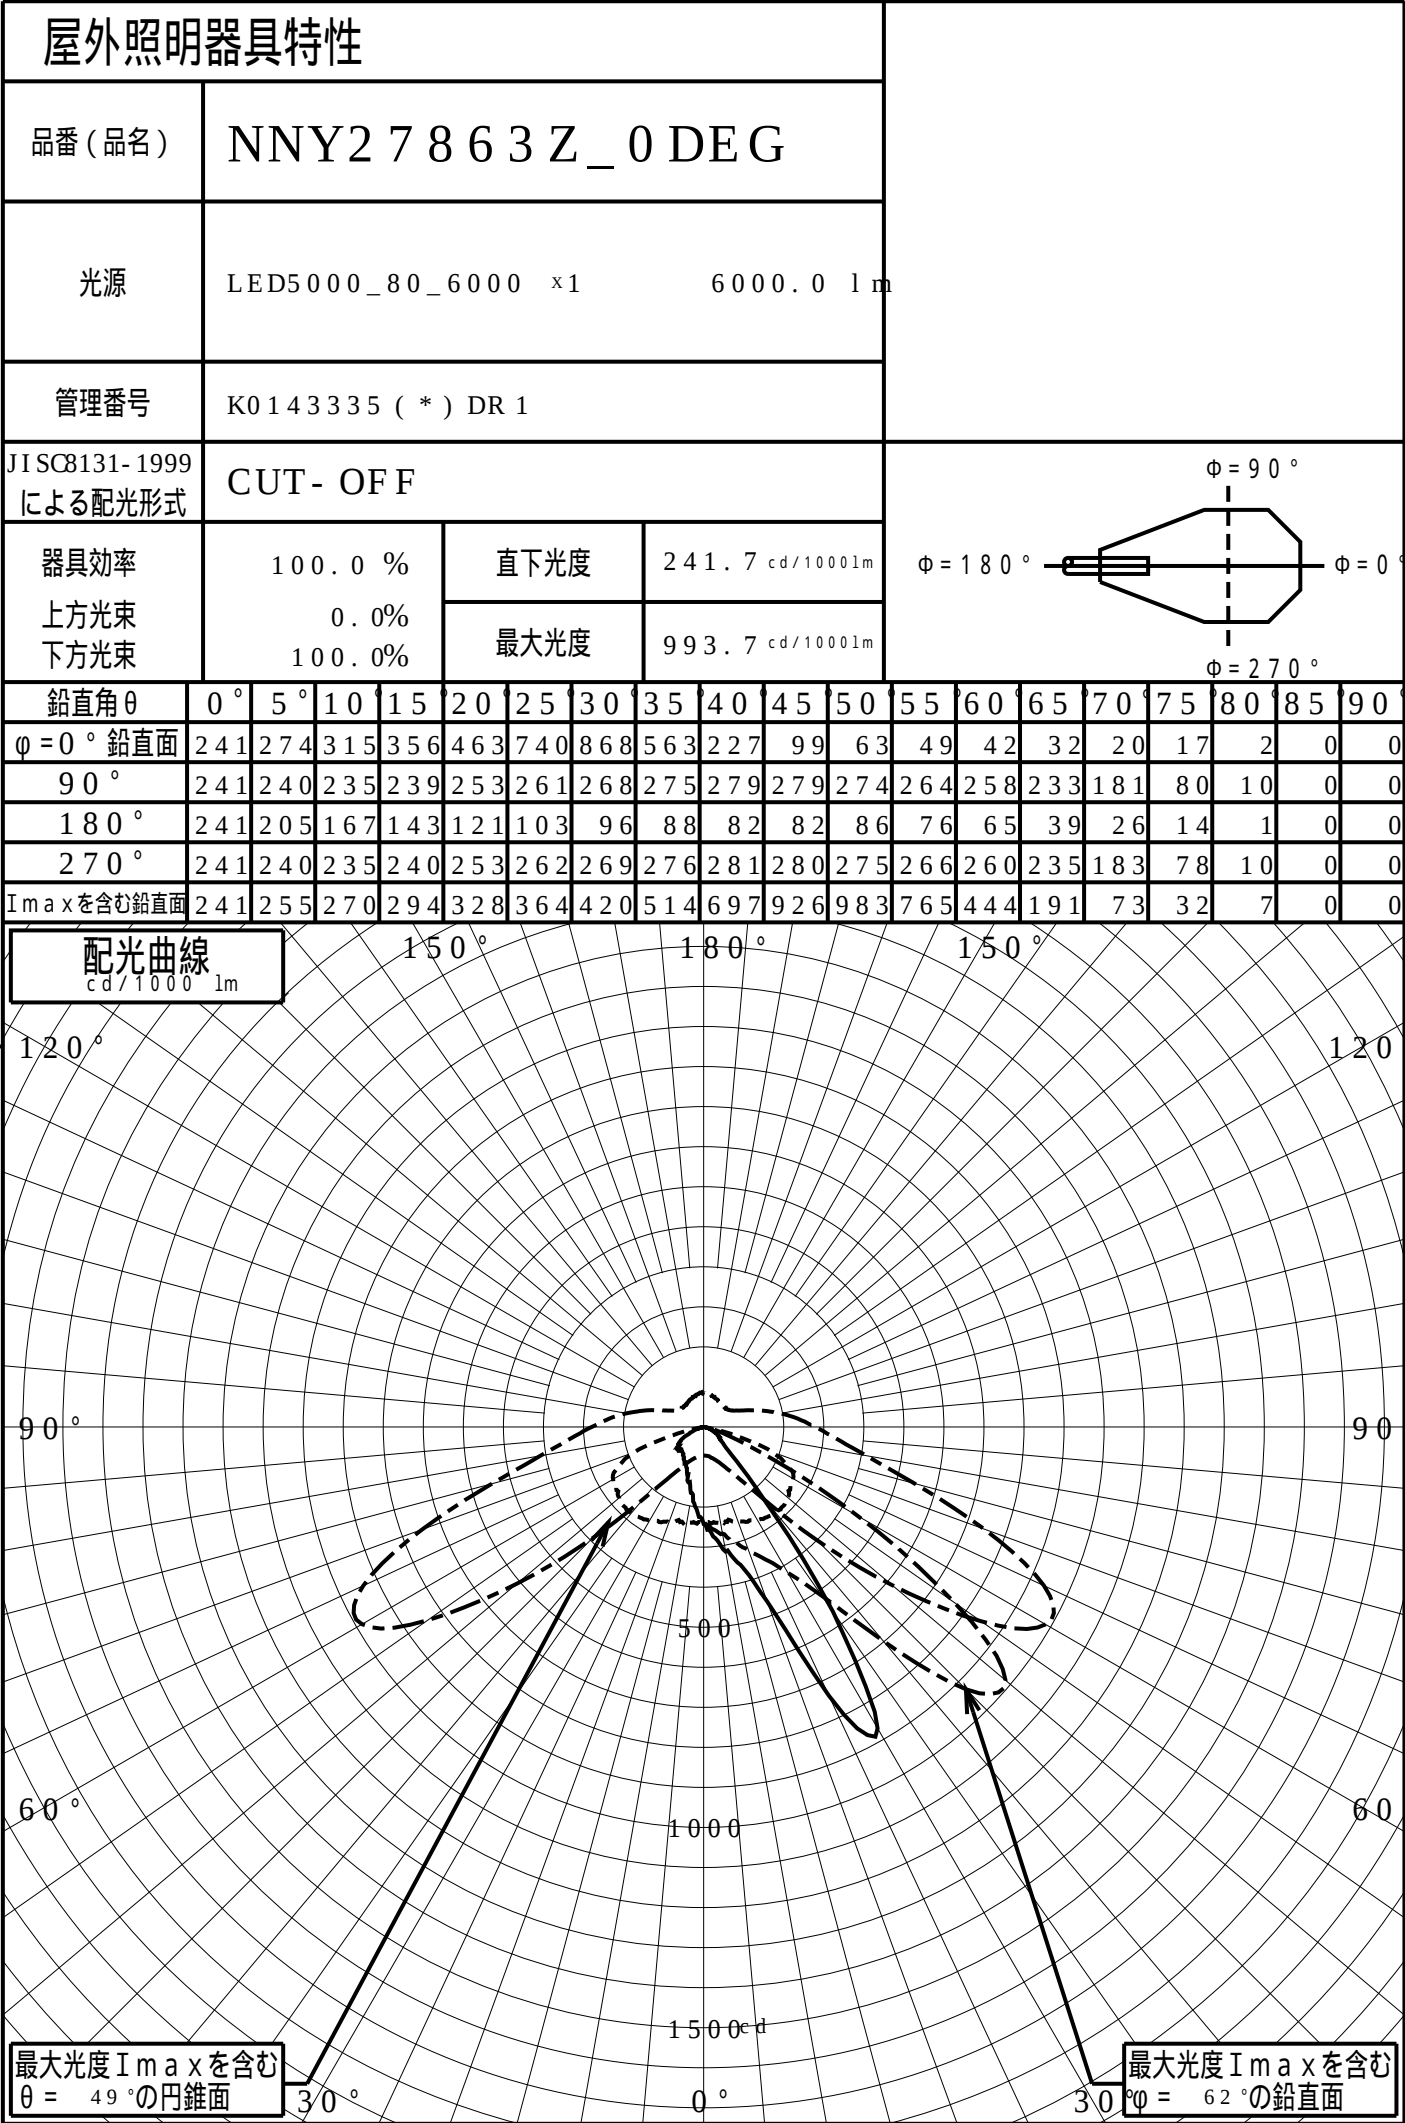


道路・トンネル照明率曲線

品番(品名)	NNY2 7 8 6 3 Z_ 0 DE G	光源	LED5 0 0 0 _ 8 0 _ 6 0 0 0 × 1
管理番号	K0 1 4 3 3 3 5 (*) DR 1		

α = 0 . 0 °

H: 取付高さ(MOUNTI NG HI GHT)

照明率(α = 0°)		
幅	歩道側	車道側
0. 0 H	0. 0 0 0	0. 0 0 0
0. 2 H	0. 0 8 2	0. 1 1 5
0. 4 H	0. 1 3 0	0. 2 7 8
0. 6 H	0. 1 5 7	0. 5 3 7
0. 8 H	0. 1 7 6	0. 6 8 9
1. 0 H	0. 1 8 9	0. 7 3 2
1. 2 H	0. 2 0 0	0. 7 4 7
1. 4 H	0. 2 0 8	0. 7 5 5
1. 6 H	0. 2 1 4	0. 7 6 0
1. 8 H	0. 2 1 8	0. 7 6 4
2. 0 H	0. 2 2 1	0. 7 6 6
2. 2 H	0. 2 2 3	0. 7 6 8
2. 4 H	0. 2 2 4	0. 7 7 0
2. 6 H	0. 2 2 5	0. 7 7 1
2. 8 H	0. 2 2 6	0. 7 7 2
3. 0 H	0. 2 2 7	0. 7 7 2
3. 2 H	0. 2 2 7	0. 7 7 3
3. 4 H	0. 2 2 8	0. 7 7 3
3. 6 H	0. 2 2 8	0. 7 7 3

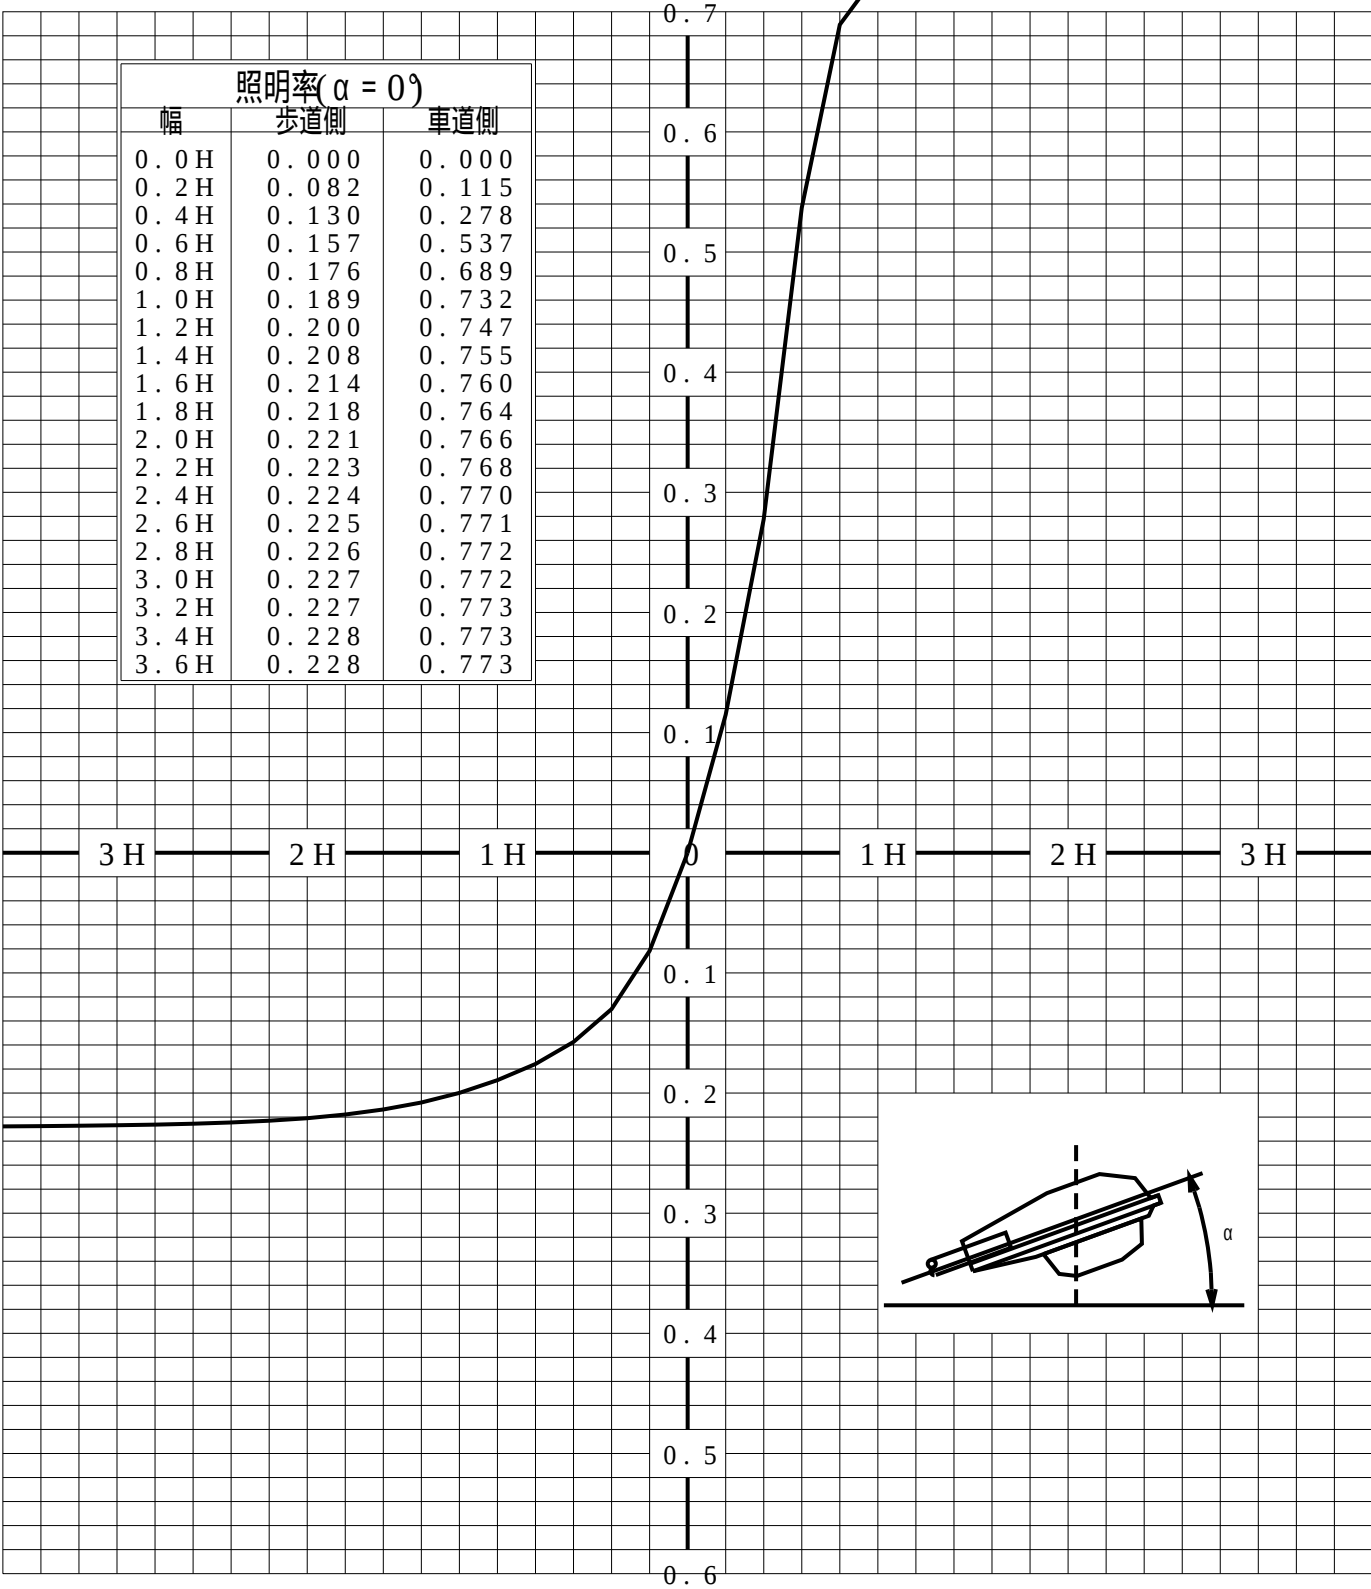

歩道側 車道側

正弦等光度曲線

品番 (品名)


NNY2 7 8 6 3 Z_0 DEG

光源


LED5000_80_6000 ×1

管理番号

K0143335 (*) DR 1

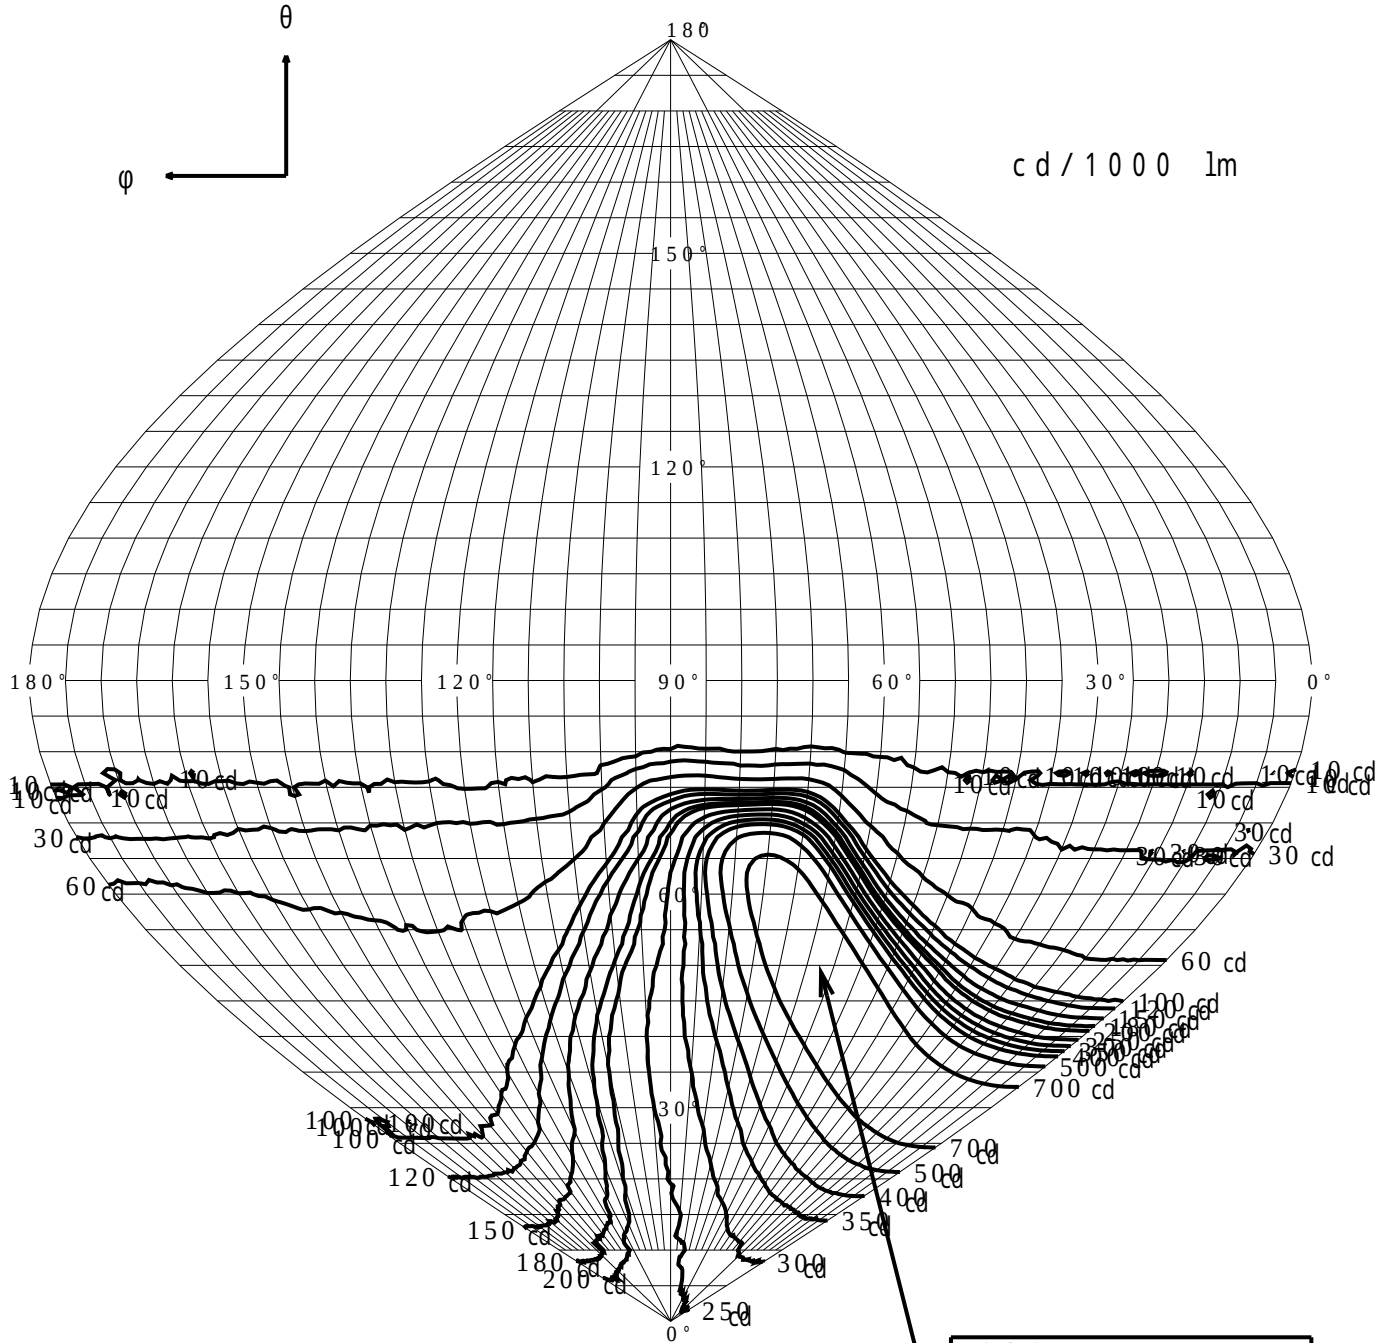

最大光度 I_{max} 993.7 cd

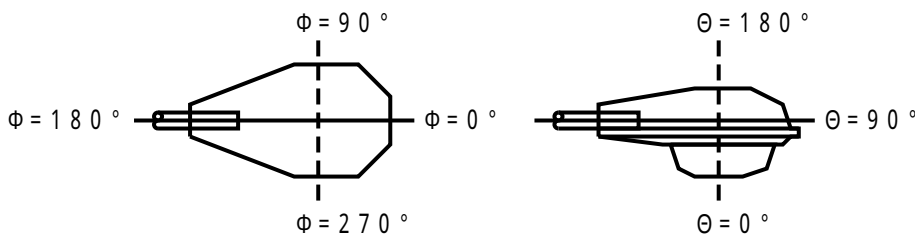

直下光度 I_o 241.7 cd