


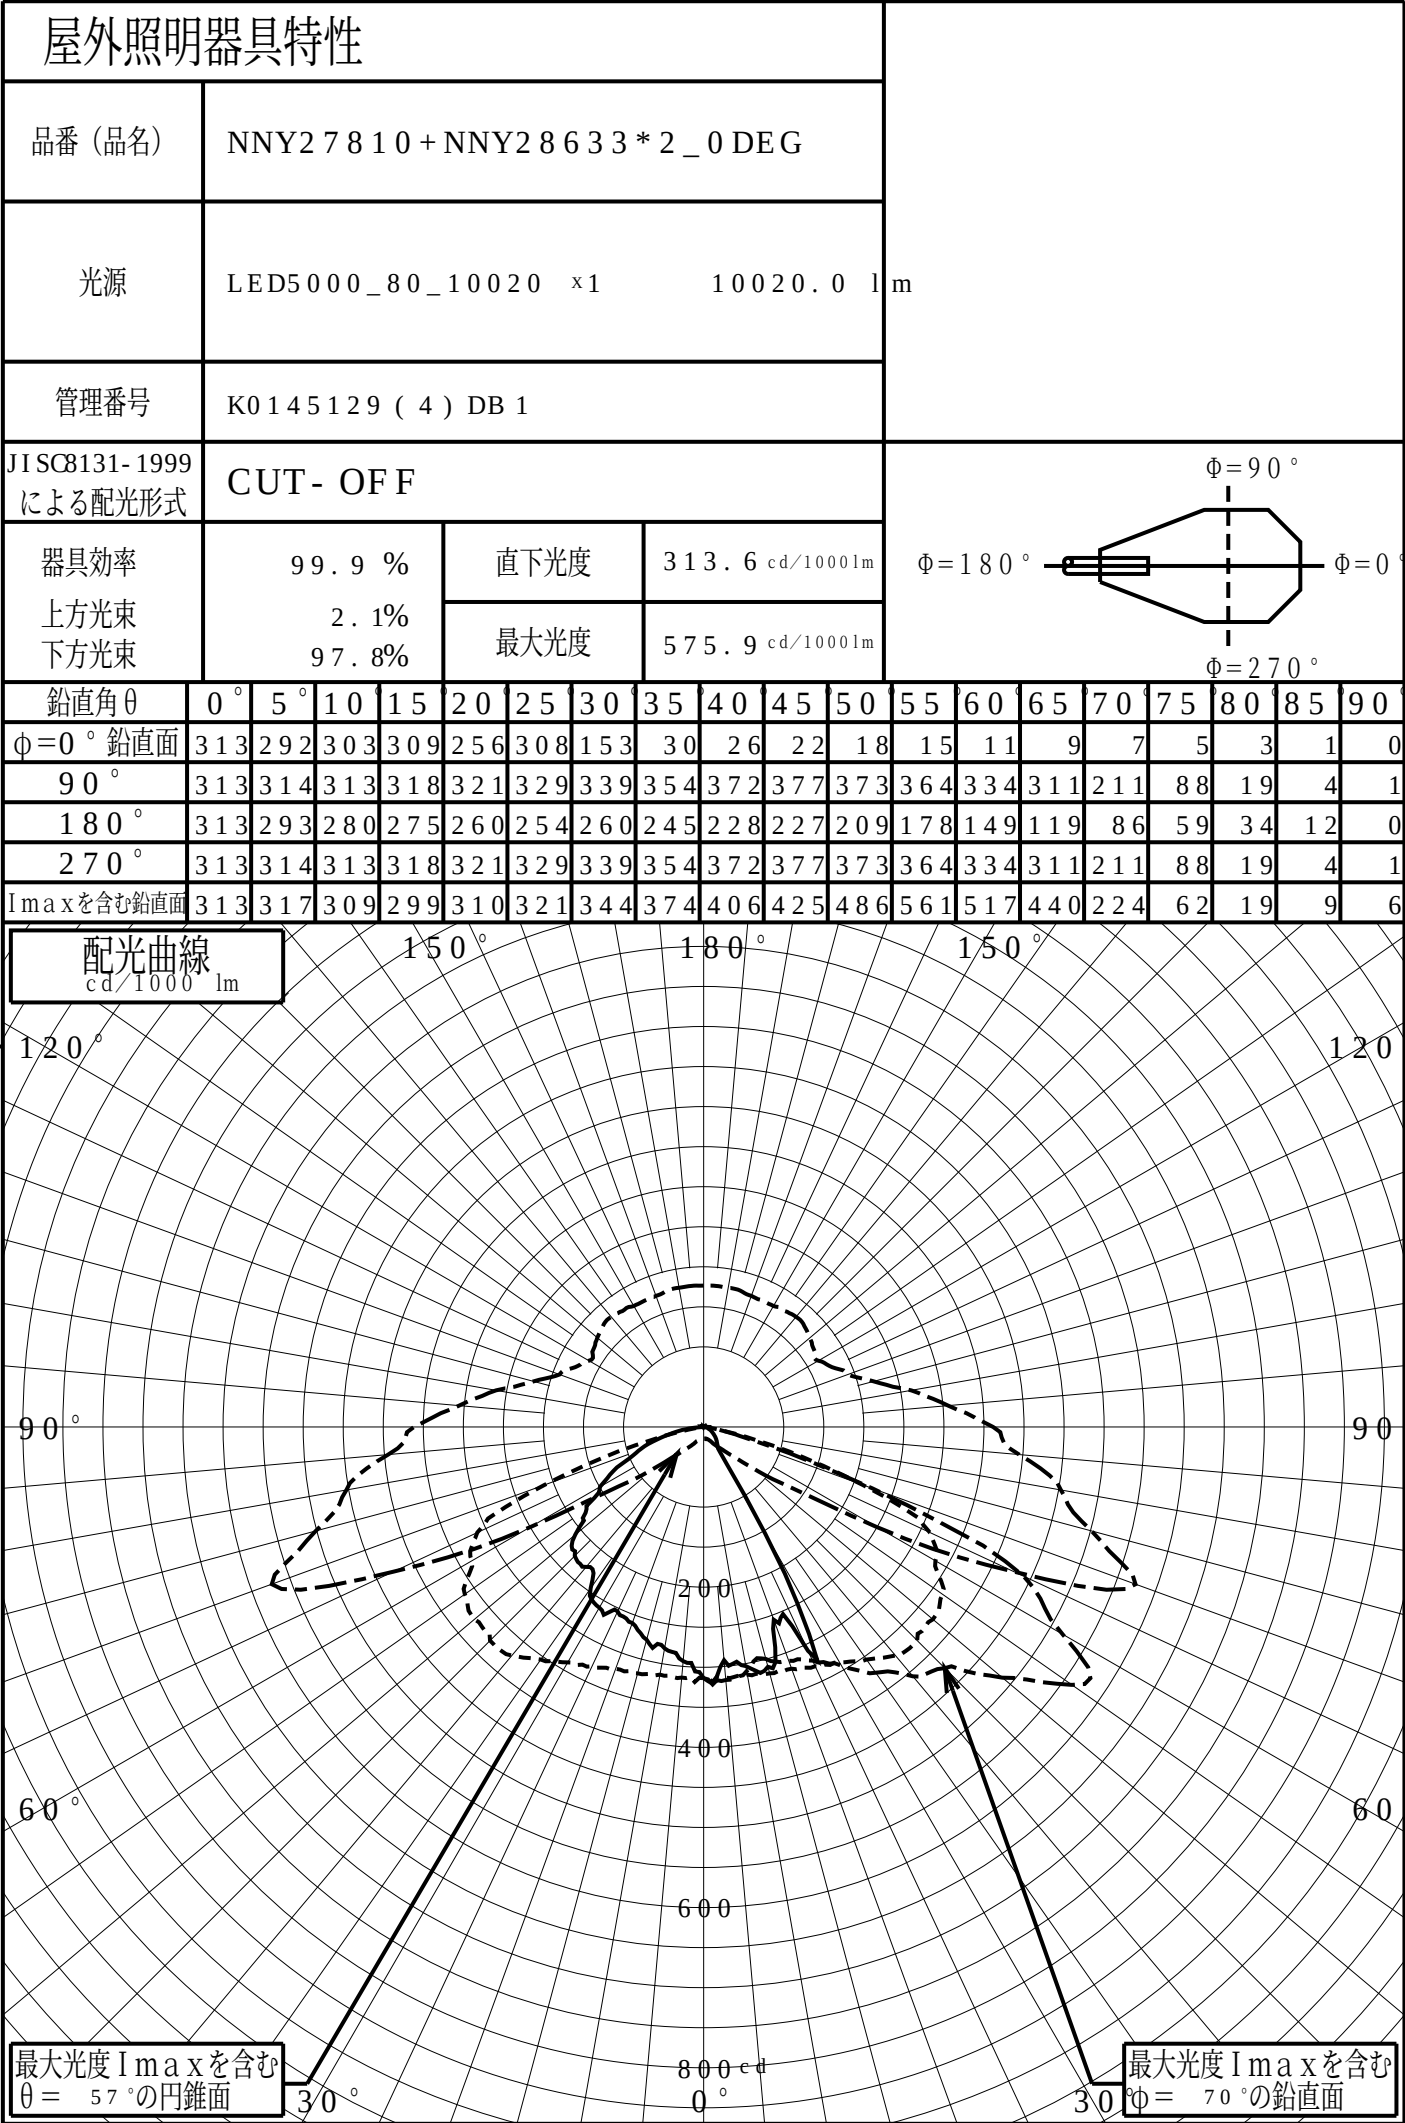

道路・トンネル照明率曲線

品番 (品名)

NNY27810+NNY28633*2_0 DEG

光源

LED5000_80_10020 x1


管理番号

K0145129 (4) DB 1

$\alpha = 0.0^\circ$

H: 取付高さ (MOUNTING HEIGHT)

照明率 ($\alpha = 0^\circ$)		
幅	歩道側	車道側
0.0H	0.000	0.000
0.2H	0.116	0.125
0.4H	0.206	0.253
0.6H	0.272	0.378
0.8H	0.323	0.422
1.0H	0.362	0.440
1.2H	0.392	0.448
1.4H	0.414	0.453
1.6H	0.431	0.456
1.8H	0.444	0.458
2.0H	0.454	0.459
2.2H	0.462	0.460
2.4H	0.469	0.461
2.6H	0.474	0.462
2.8H	0.478	0.462
3.0H	0.481	0.463
3.2H	0.484	0.463
3.4H	0.487	0.463
3.6H	0.489	0.464

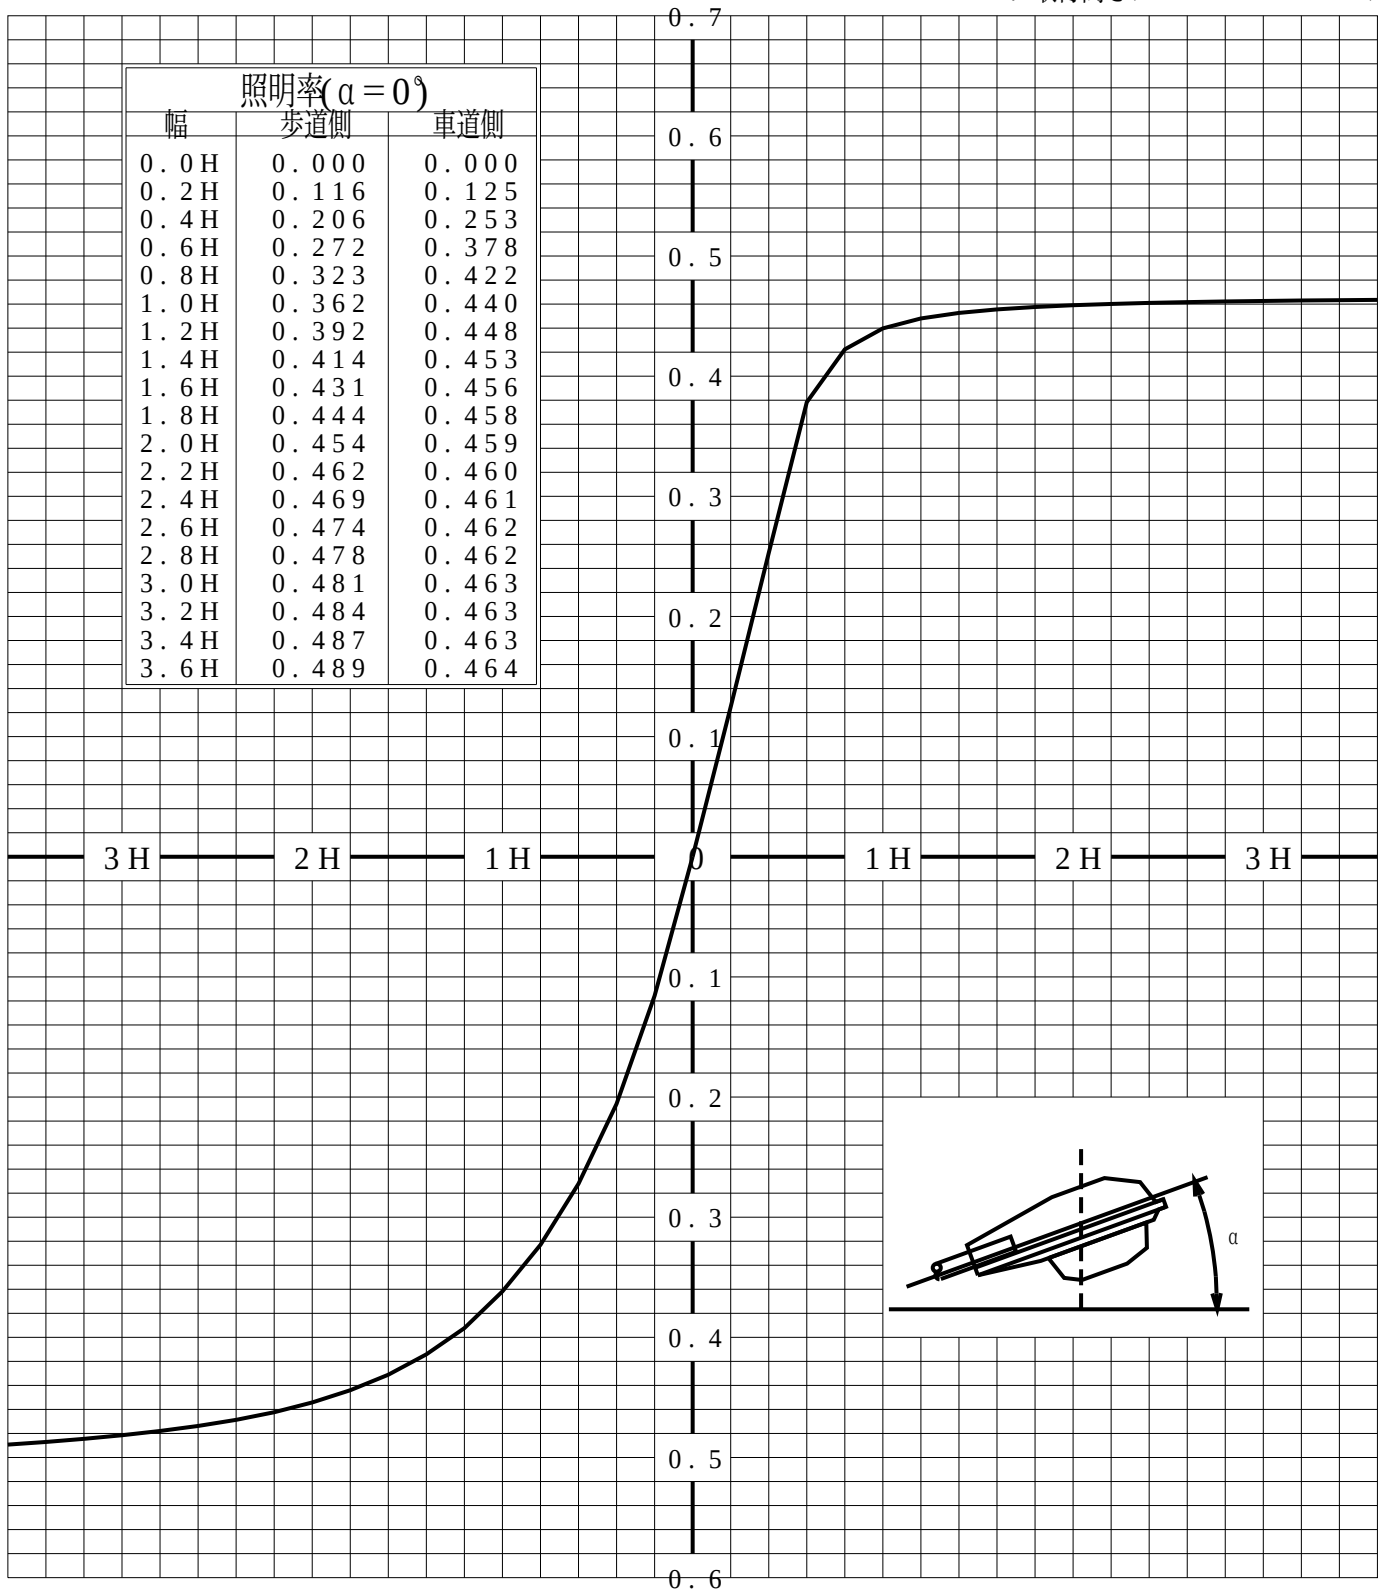

歩道側  車道側

正弦等光度曲線

品番 (品名)


NNY27810+NNY28633*2_0DEG

光源

LED5000_80_10020 ×1

管理番号

K0145129 (4) DB 1

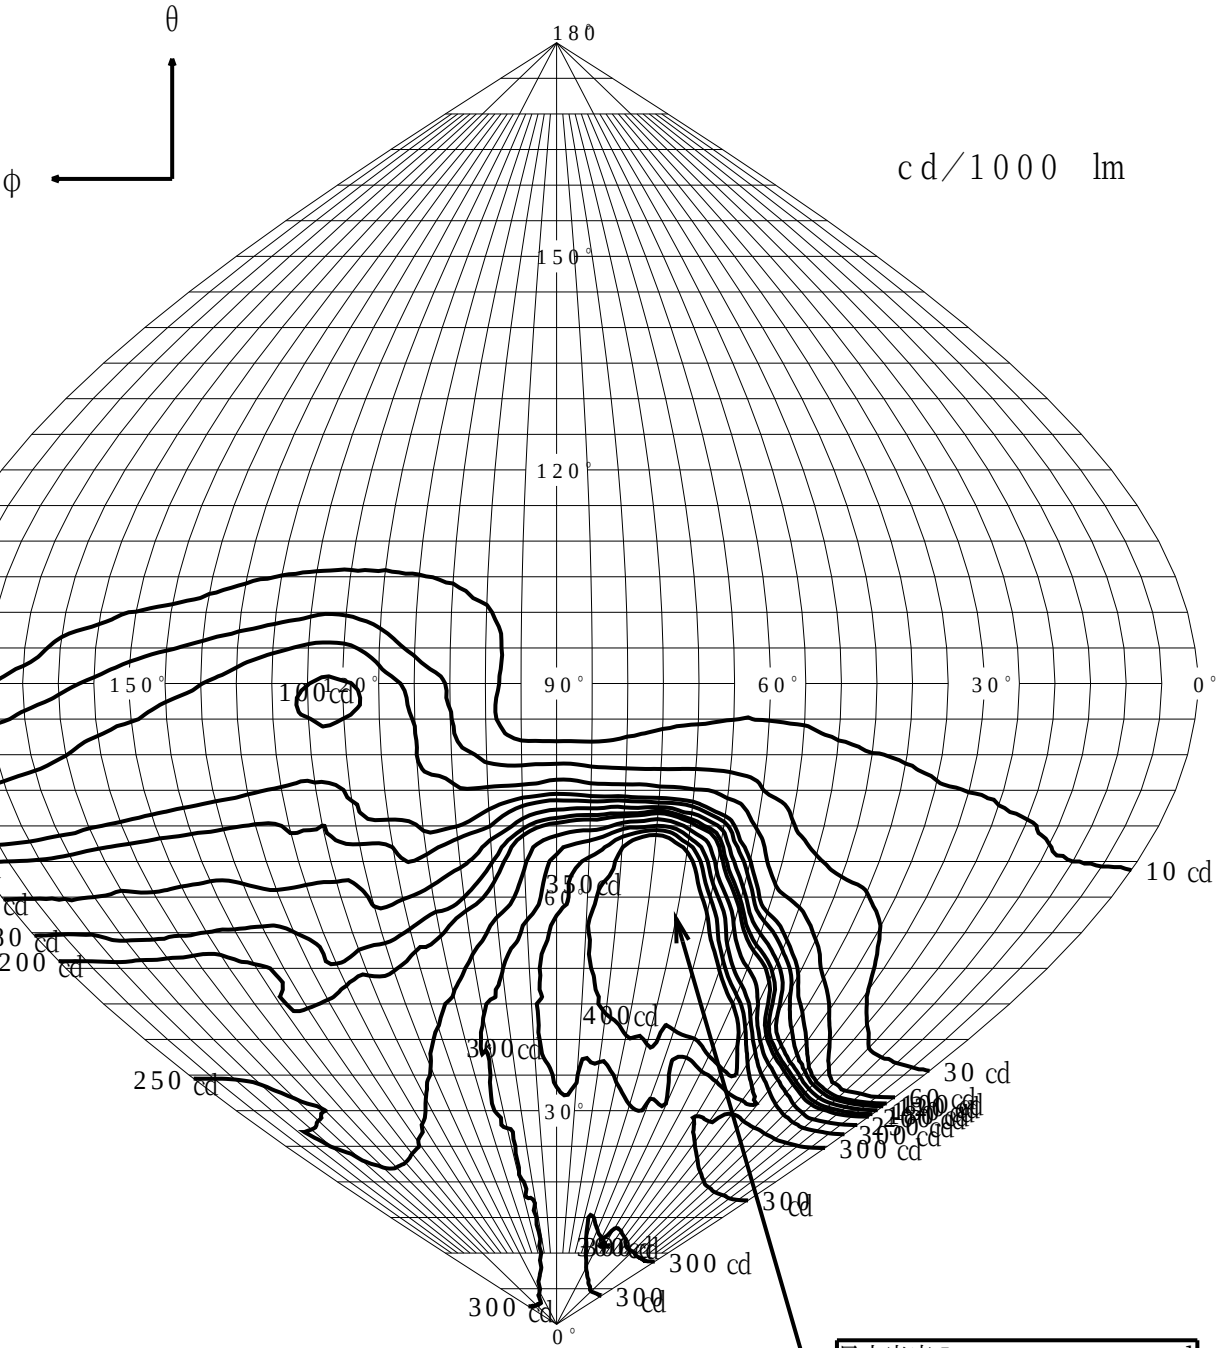

最大光度 I max 575.9 c d

直下光度 I o 313.6 c d

