


投光照明器具特性

品名(品番)	NTS05506W+NTS91031(17DEG)	
光源	LED4000_70_2130 x1	2130.0 lm
管理番号	K0170843(0)DJ1 TF	


配光の区分・種類	軸対称配光 中角形	主ビ-ム効率	89.0 %		
器具点灯角度		ビ-ム範囲	$I_0 / 2$	$I_0 / 10$	$I_0 / 20$
器具効率	100.0 %	ビ-ム効率	40.4%	75.4%	82.9%
最大光度	6049 cd/1000 lm	ビ-ム角	19.6	37.7	46.0

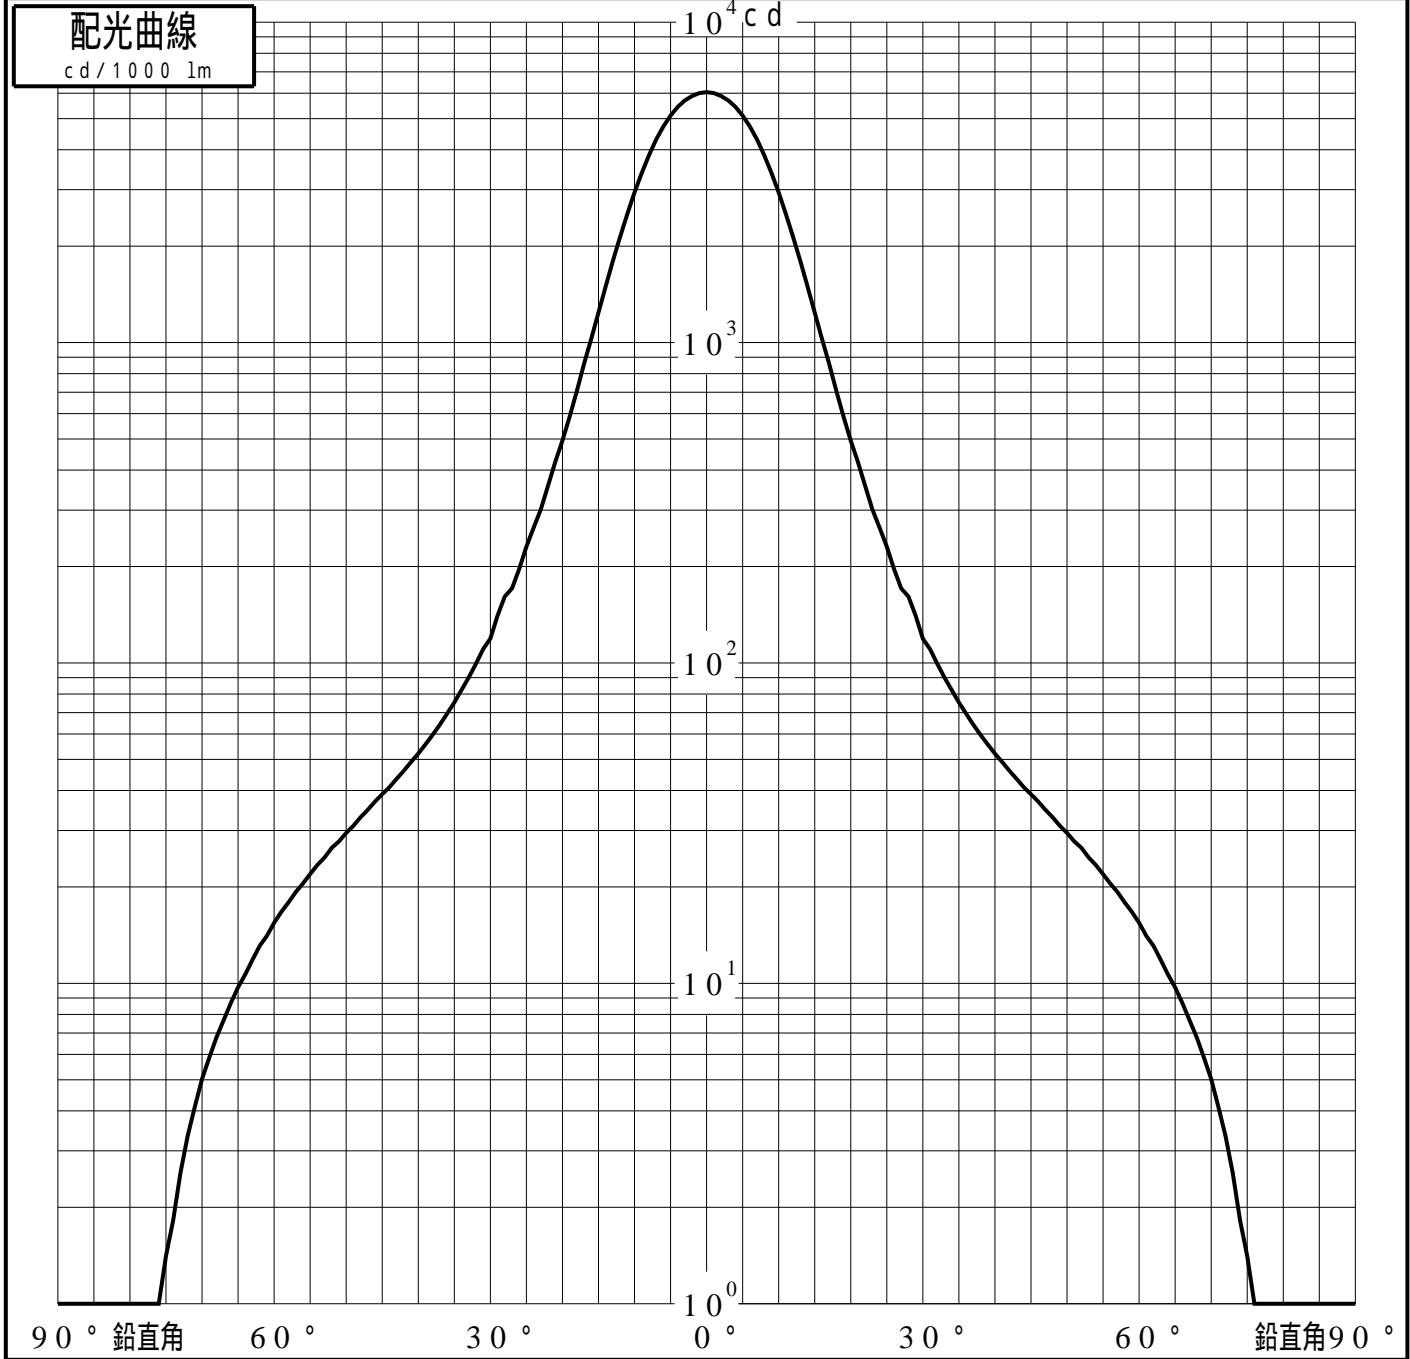

投光照明器具特性

品番 (品名)	NTS05506W+NTS91031(17DEG)	光源	LED4000_70_2130 ×1
管理番号	K0170843(0)DJ1 TF		

累積光束曲線

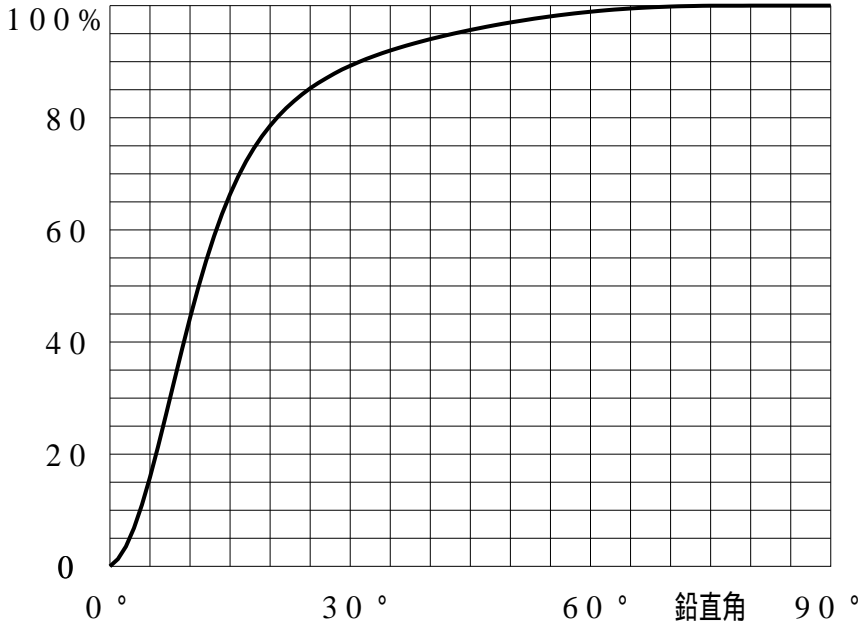

等光度曲線

(座標系)
cd/1000 lm

