
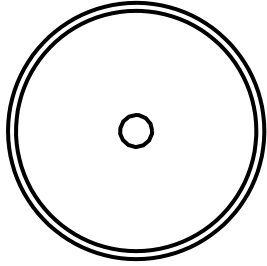


投光照明器具特性


品名(品番)	NTS51333+NTS91056W+NTS90					
光源	LED3000_70_525 ×1 525.0 lm					
管理番号	K0156317(3)DJ1 TF					
配光の区分・種類	軸対称配光 広角形	主ビ-ム効率	99.8%			
器具点灯角度		ビ-ム範囲	$I_0 / 2$	$I_0 / 10$	$I_0 / 20$	
器具効率	100.0%	ビ-ム効率	55.7%	91.5%	96.9%	
最大光度	2471 cd/1000 lm	ビ-ム角	36.3	60.9	70.1	

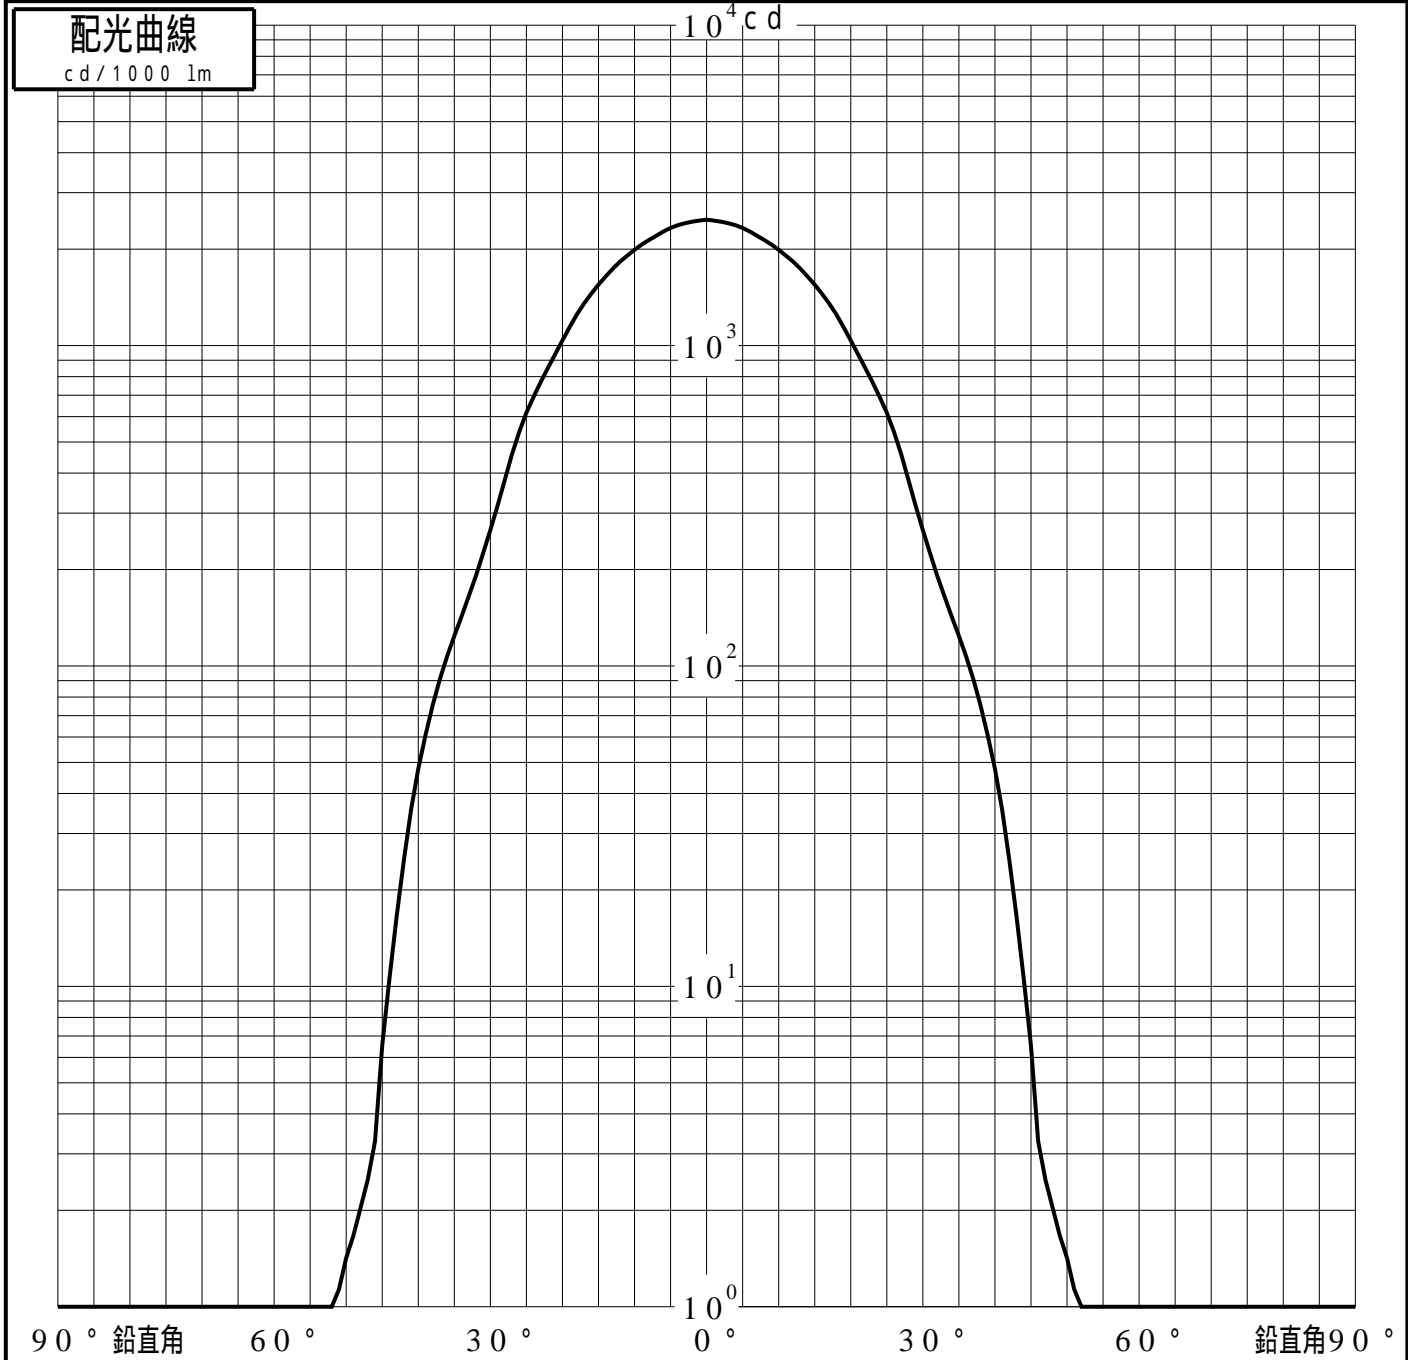

投光照明器具特性


品番 (品名)	NTS51333+NTS91056W+NTS90	光源	LED3000_70_525 ×1
管理番号	K0156317(3)DJ1 TF		

累積光束曲線

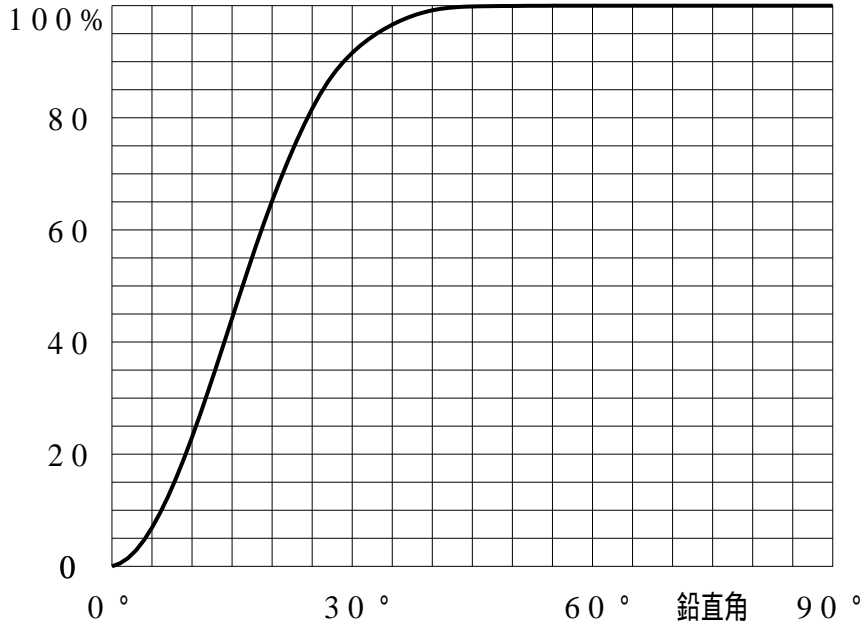

等光度曲線

(座標系)
cd/1000 lm

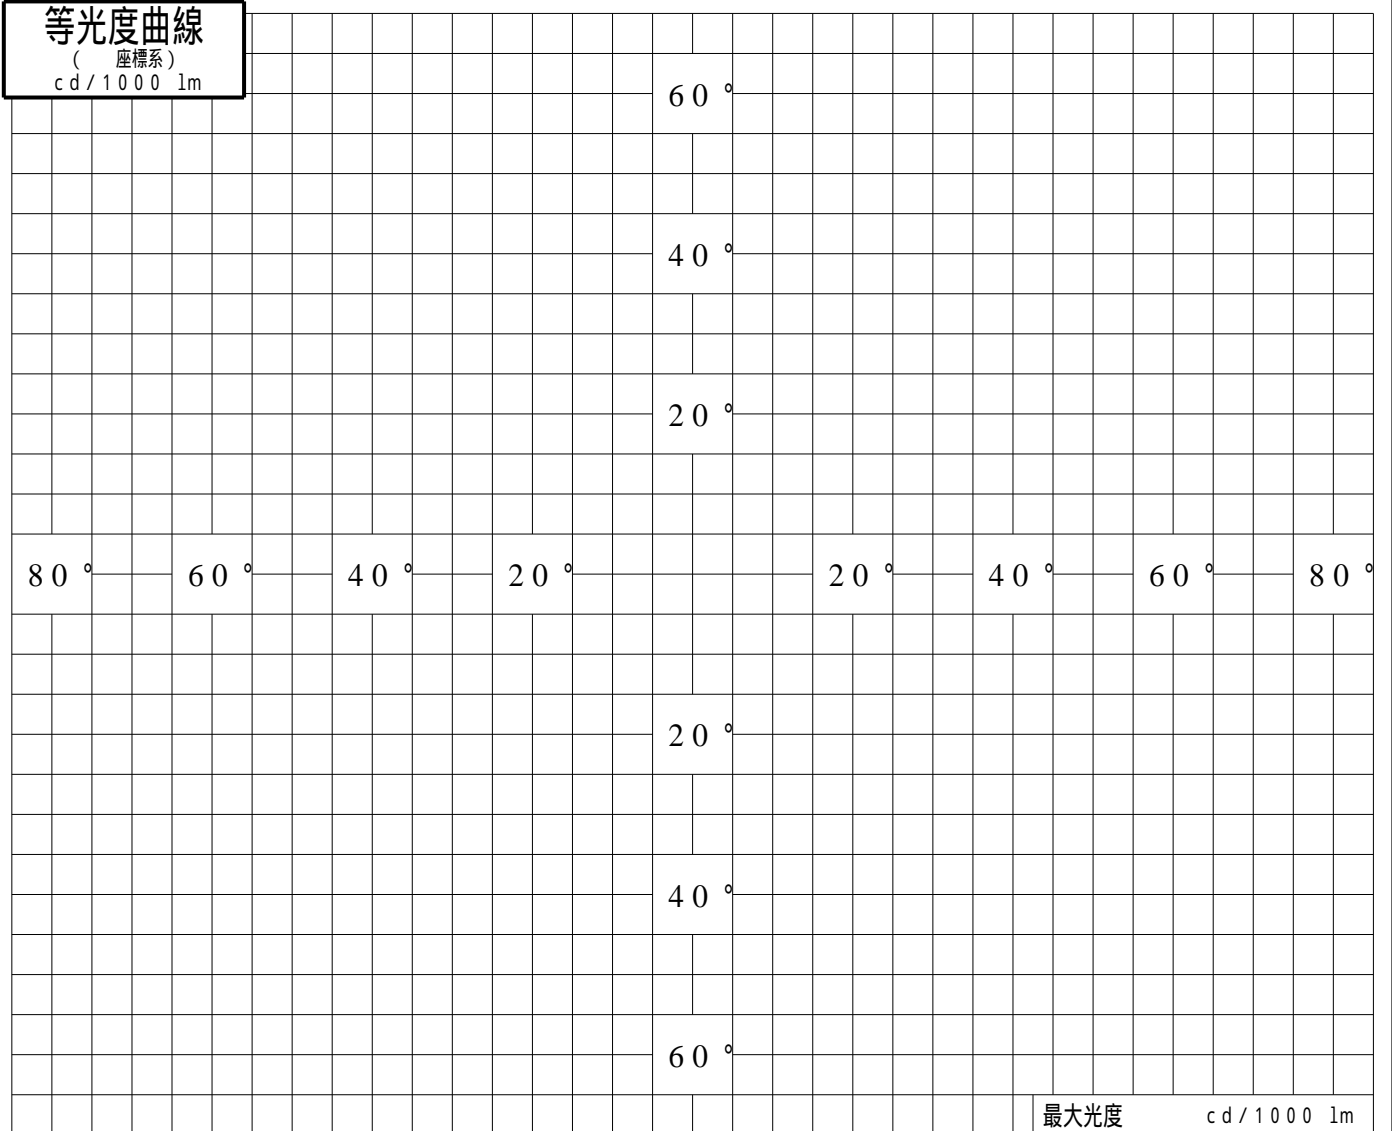

最大光度 cd/1000 lm