


屋外照明器具特性

| | | | | | | | | | | | | | | | | | | | | |
|--------------------------|------------------------------|------|------------------|-----|-----|-----|-----|-----|-----|-----|-----|------|------|-----|-----|-----|-----|-----|-----|---|
| 品番(品名) | NYR10121+NYK71000_0DEG | | | | | | | | | | | | | | | | | | | |
| 光源 | LED5000_80_3640 ×1 3640.0 lm | | | | | | | | | | | | | | | | | | | |
| 管理番号 | K0158328(4)DB1 | | | | | | | | | | | | | | | | | | | |
| JISC8131-1999 による配光形式 | CUT-OFF | | | | | | | | | | | | | | | | | | | |
| 器具効率 | 100.0% | 直下光度 | 202.1 cd/1000lm | | | | | | | | | | | | | | | | | |
| 上方光束 | 0.1% | 最大光度 | 1189.8 cd/1000lm | | | | | | | | | | | | | | | | | |
| 下方光束 | 99.9% | | | | | | | | | | | | | | | | | | | |
| 鉛直角 | 0° | 5° | 10° | 15° | 20° | 25° | 30° | 35° | 40° | 45° | 50° | 55° | 60° | 65° | 70° | 75° | 80° | 85° | 90° | |
| =0°鉛直面 | 202 | 257 | 346 | 507 | 765 | 873 | 696 | 335 | 144 | 84 | 64 | 52 | 35 | 31 | 17 | 12 | 8 | 0 | 0 | 0 |
| 90° | 202 | 200 | 203 | 210 | 220 | 231 | 243 | 250 | 259 | 268 | 280 | 303 | 335 | 353 | 293 | 111 | 29 | 0 | 0 | 0 |
| 180° | 202 | 139 | 96 | 62 | 54 | 32 | 17 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 270° | 202 | 200 | 203 | 210 | 220 | 231 | 243 | 250 | 259 | 268 | 280 | 303 | 335 | 353 | 293 | 111 | 29 | 0 | 0 | 0 |
| I _{max} を含む鉛直面 | 202 | 218 | 232 | 259 | 291 | 322 | 376 | 459 | 572 | 769 | 981 | 1124 | 1180 | 862 | 412 | 126 | 42 | 19 | 4 | 4 |

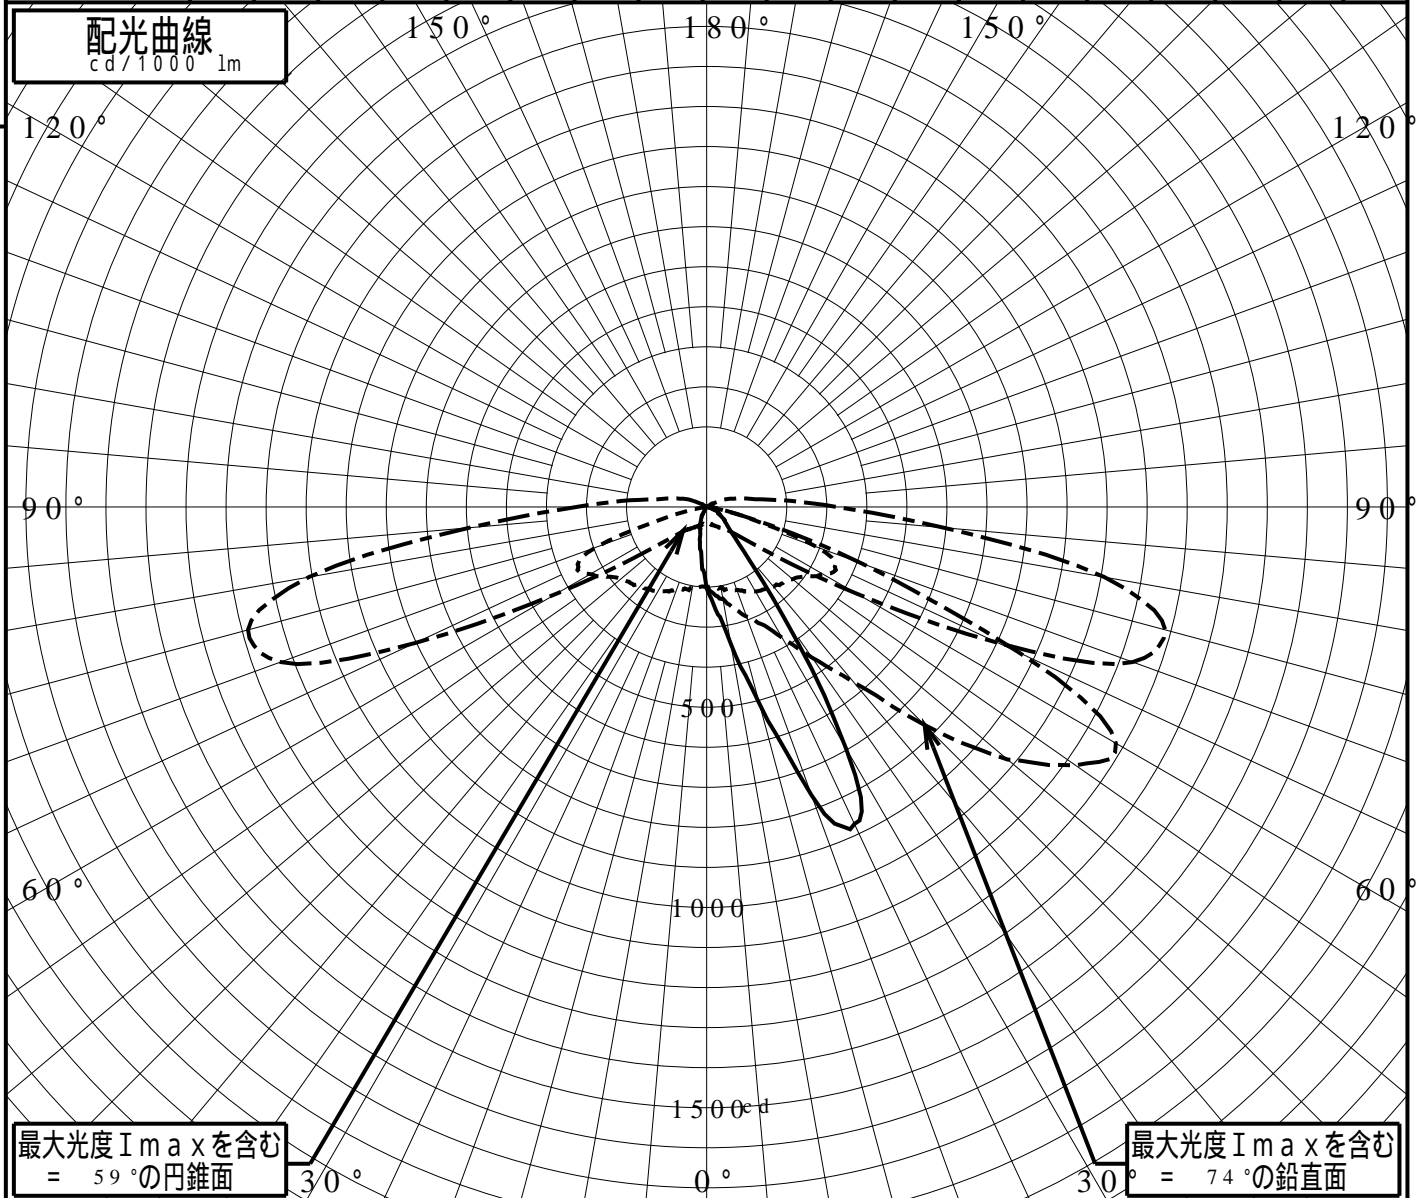

道路・トンネル照明率曲線

品番(品名)

NYR10121+NYK71000_0DEG

光源

LED5000_80_3640 ×1


管理番号

K0158328 (4)DB 1

————— = 0.0°

H: 取付高さ(MOUNTING HEIGHT)


| 照明率(= 0°) | | |
|------------|-------|-------|
| 幅 | 歩道側 | 車道側 |
| 0.0H | 0.000 | 0.000 |
| 0.2H | 0.064 | 0.127 |
| 0.4H | 0.092 | 0.379 |
| 0.6H | 0.106 | 0.660 |
| 0.8H | 0.110 | 0.783 |
| 1.0H | 0.112 | 0.822 |
| 1.2H | 0.113 | 0.839 |
| 1.4H | 0.114 | 0.850 |
| 1.6H | 0.114 | 0.857 |
| 1.8H | 0.115 | 0.861 |
| 2.0H | 0.115 | 0.864 |
| 2.2H | 0.115 | 0.867 |
| 2.4H | 0.115 | 0.869 |
| 2.6H | 0.115 | 0.870 |
| 2.8H | 0.115 | 0.871 |
| 3.0H | 0.115 | 0.872 |
| 3.2H | 0.115 | 0.873 |
| 3.4H | 0.115 | 0.873 |
| 3.6H | 0.115 | 0.874 |

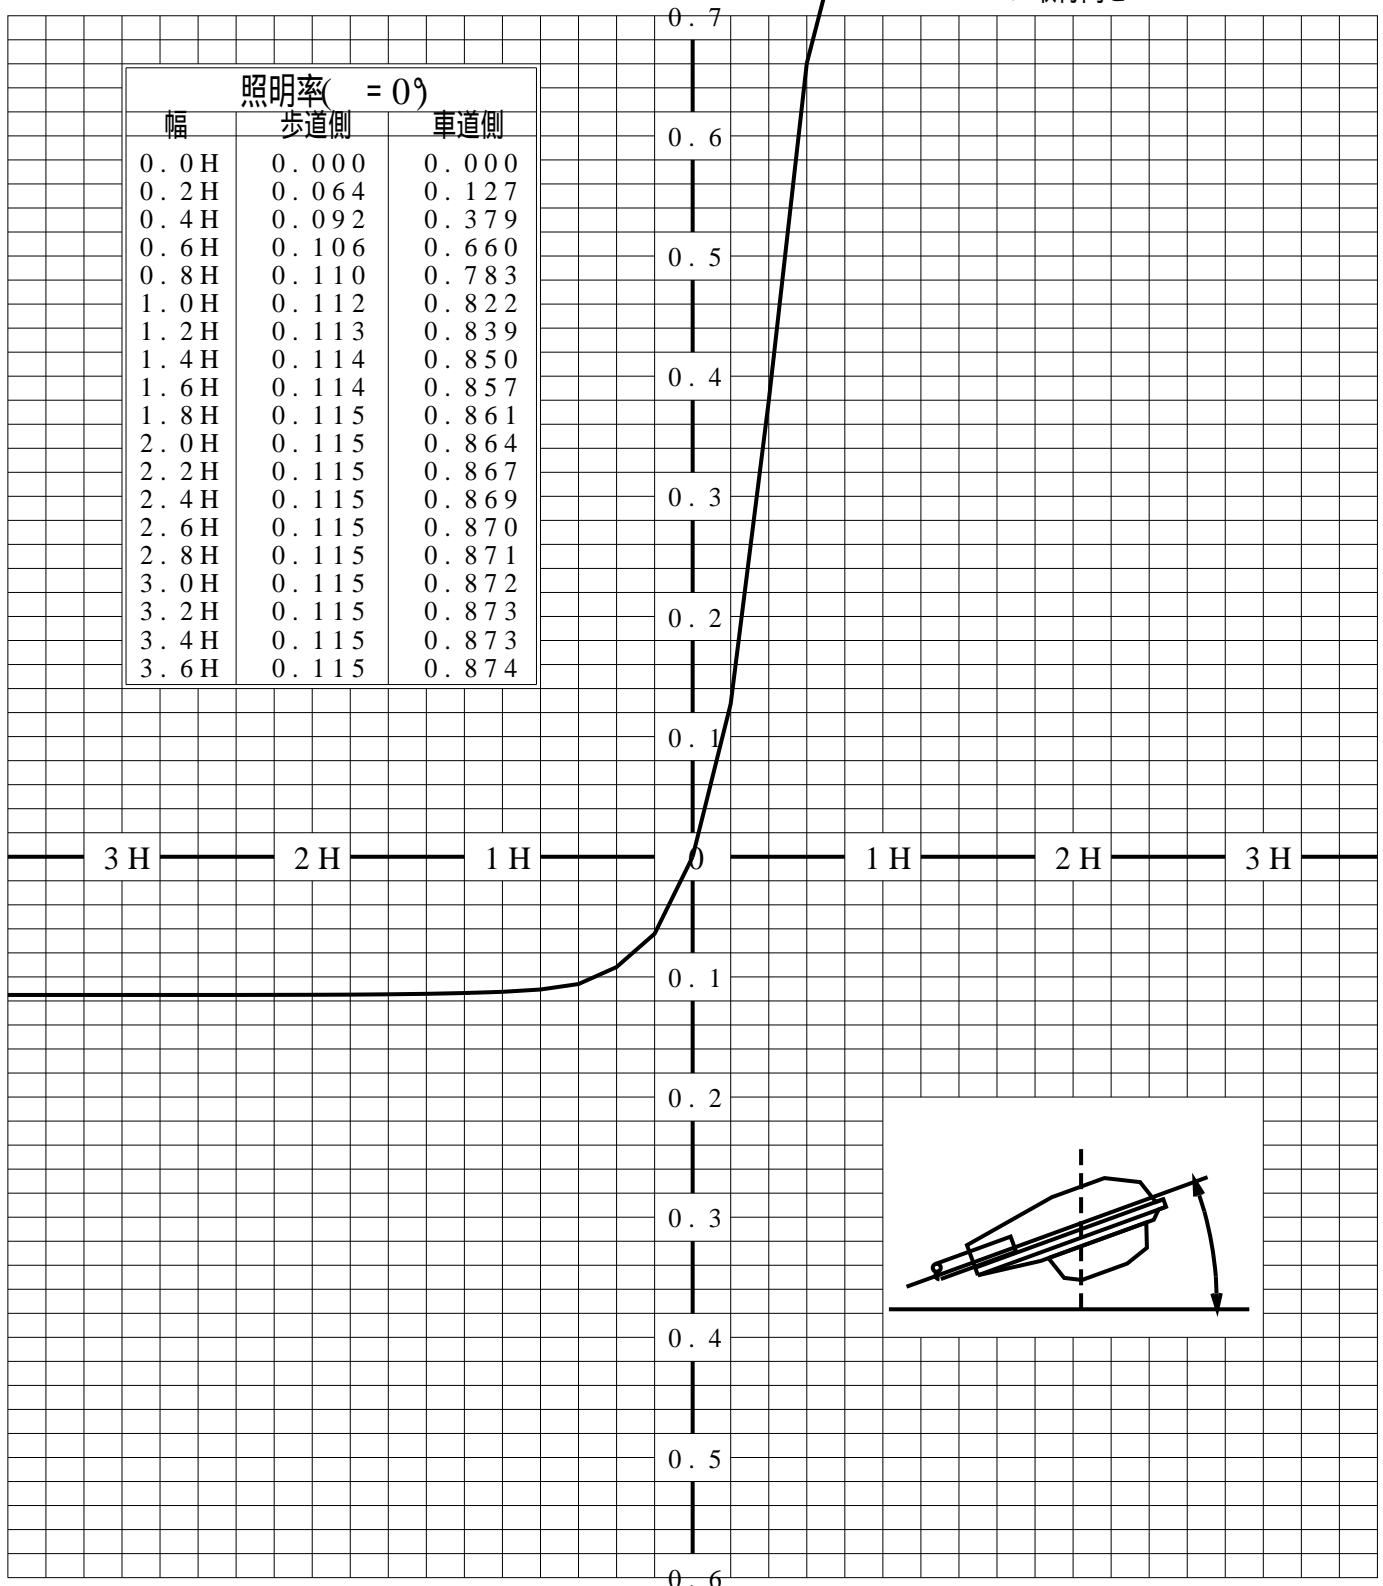

歩道側 ← → 車道側

正弦等光度曲線

| | | | |
|---------|------------------------|----|--------------------|
| 品番 (品名) | NYR10121+NYK71000_0DEG | 光源 | LED5000_80_3640 ×1 |
| 管理番号 | K0158328(4)DB 1 | | |

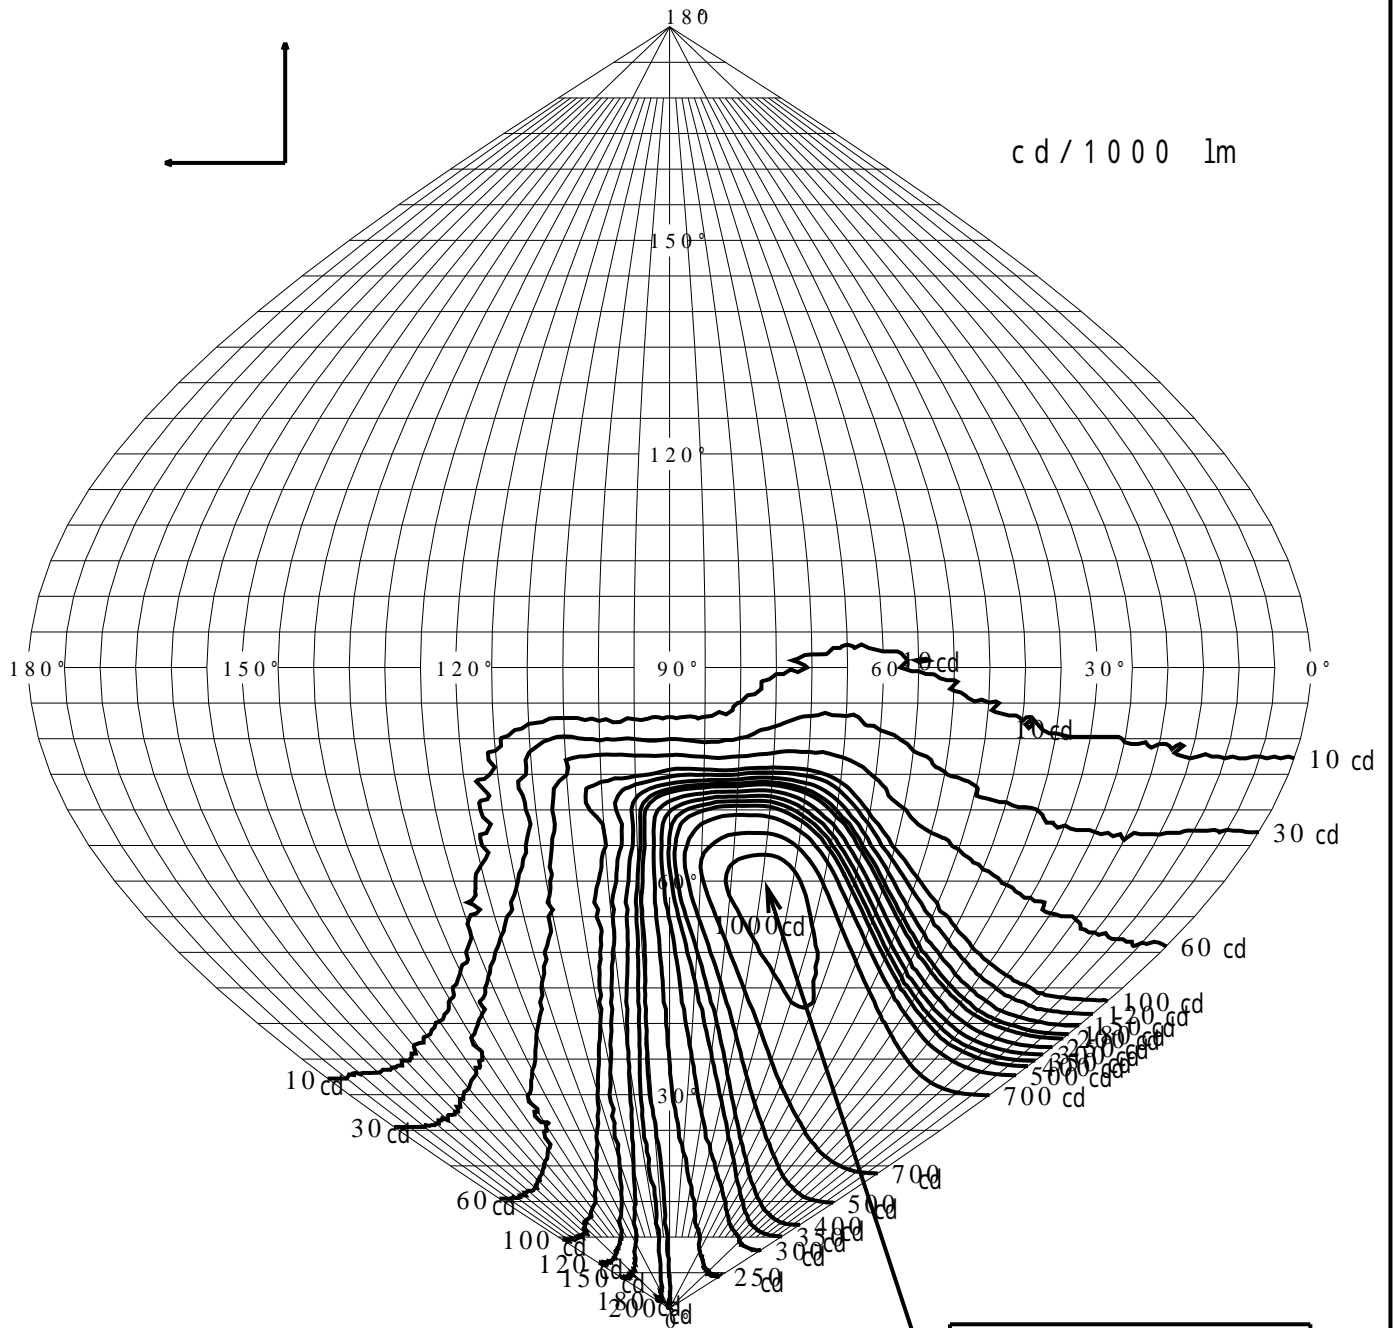

最大光度 I_{max} 1189.8 cd

直下光度 I_0 202.1 cd

