


投光照明器具特性

品名(品番)	NYS 1 2 3 4 7 K+NYK4 1 2 0 4	
光源	LED5000_85_20500 x1	20500.0 lm
管理番号	K0170833(0)DJ1 XY	


配光の区分・種類	非対称配光	主ビ-ム効率	%		
器具点灯角度		ビ-ム範囲	$I_0 / 2$	$I_0 / 10$	$I_0 / 20$
器具効率	100.0 %	ビ-ム効率	41.4%	84.9%	92.6%
最大光度	2032 cd/1000 lm	ビ-ム角	AA' 33.2	71.1	81.5
			BB' 36.4	74.9	99.2

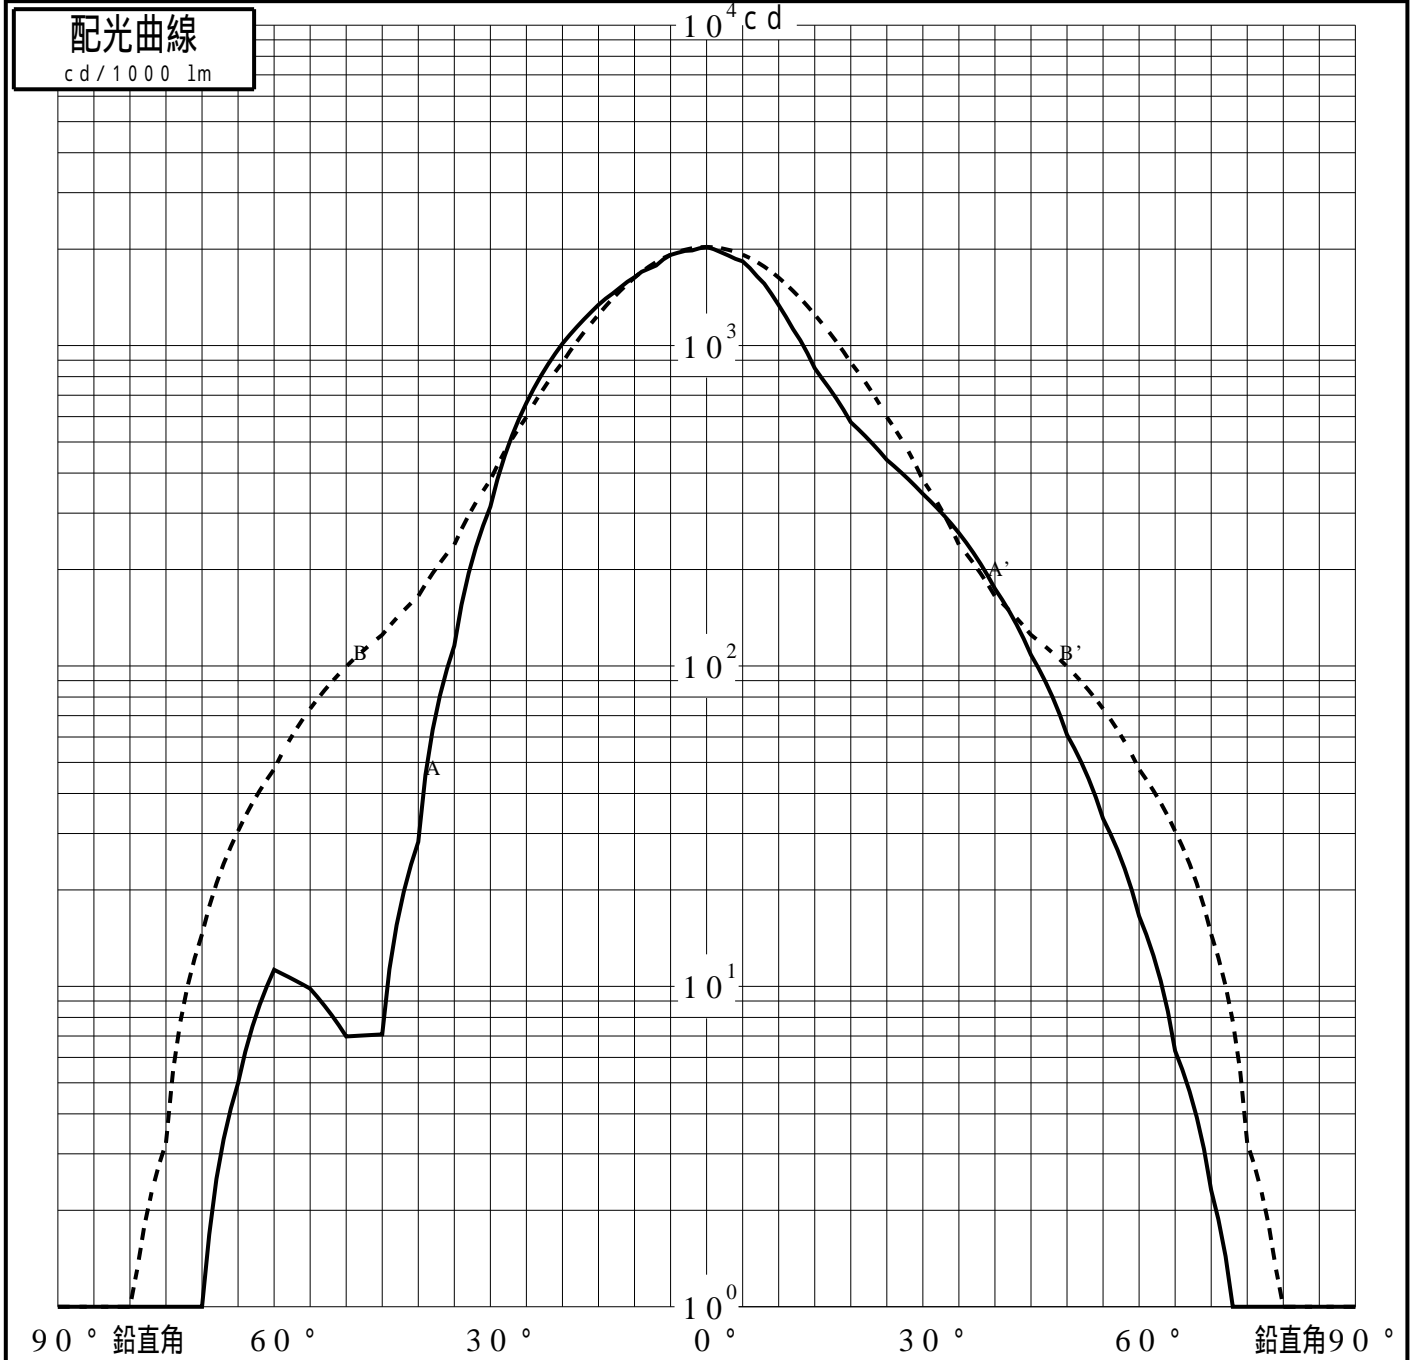

投光照明器具特性

品番 (品名)	NYS12347K+NYK41204	光源	LED5000_85_20500 ×1
管理番号	K0170833(0)DJ1 XY		

累積光束曲線

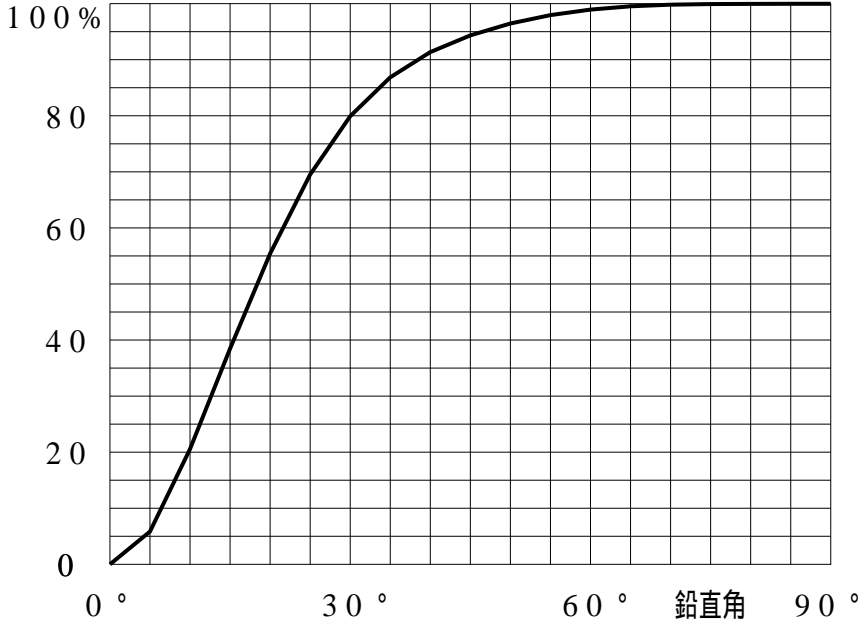

等光度曲線

(座標系)
cd/1000 lm

