


投光照明器具特性

品名(品番)	NYT1033NK+NYK50000	
光源	LED5000_70_3040 x1	3040.0 lm
管理番号	K0165405(0)DJ1 TF	


配光の区分・種類	軸対称配光 広角形	主ビ-ム効率	98.5%		
器具点灯角度		ビ-ム範囲	I ₀ / 2	I ₀ / 10	I ₀ / 20
器具効率	100.0 %	ビ-ム効率	52.9%	91.1%	94.9%
最大光度	2202 cd/1000 lm	ビ-ム角	37.4	63.2	70.6

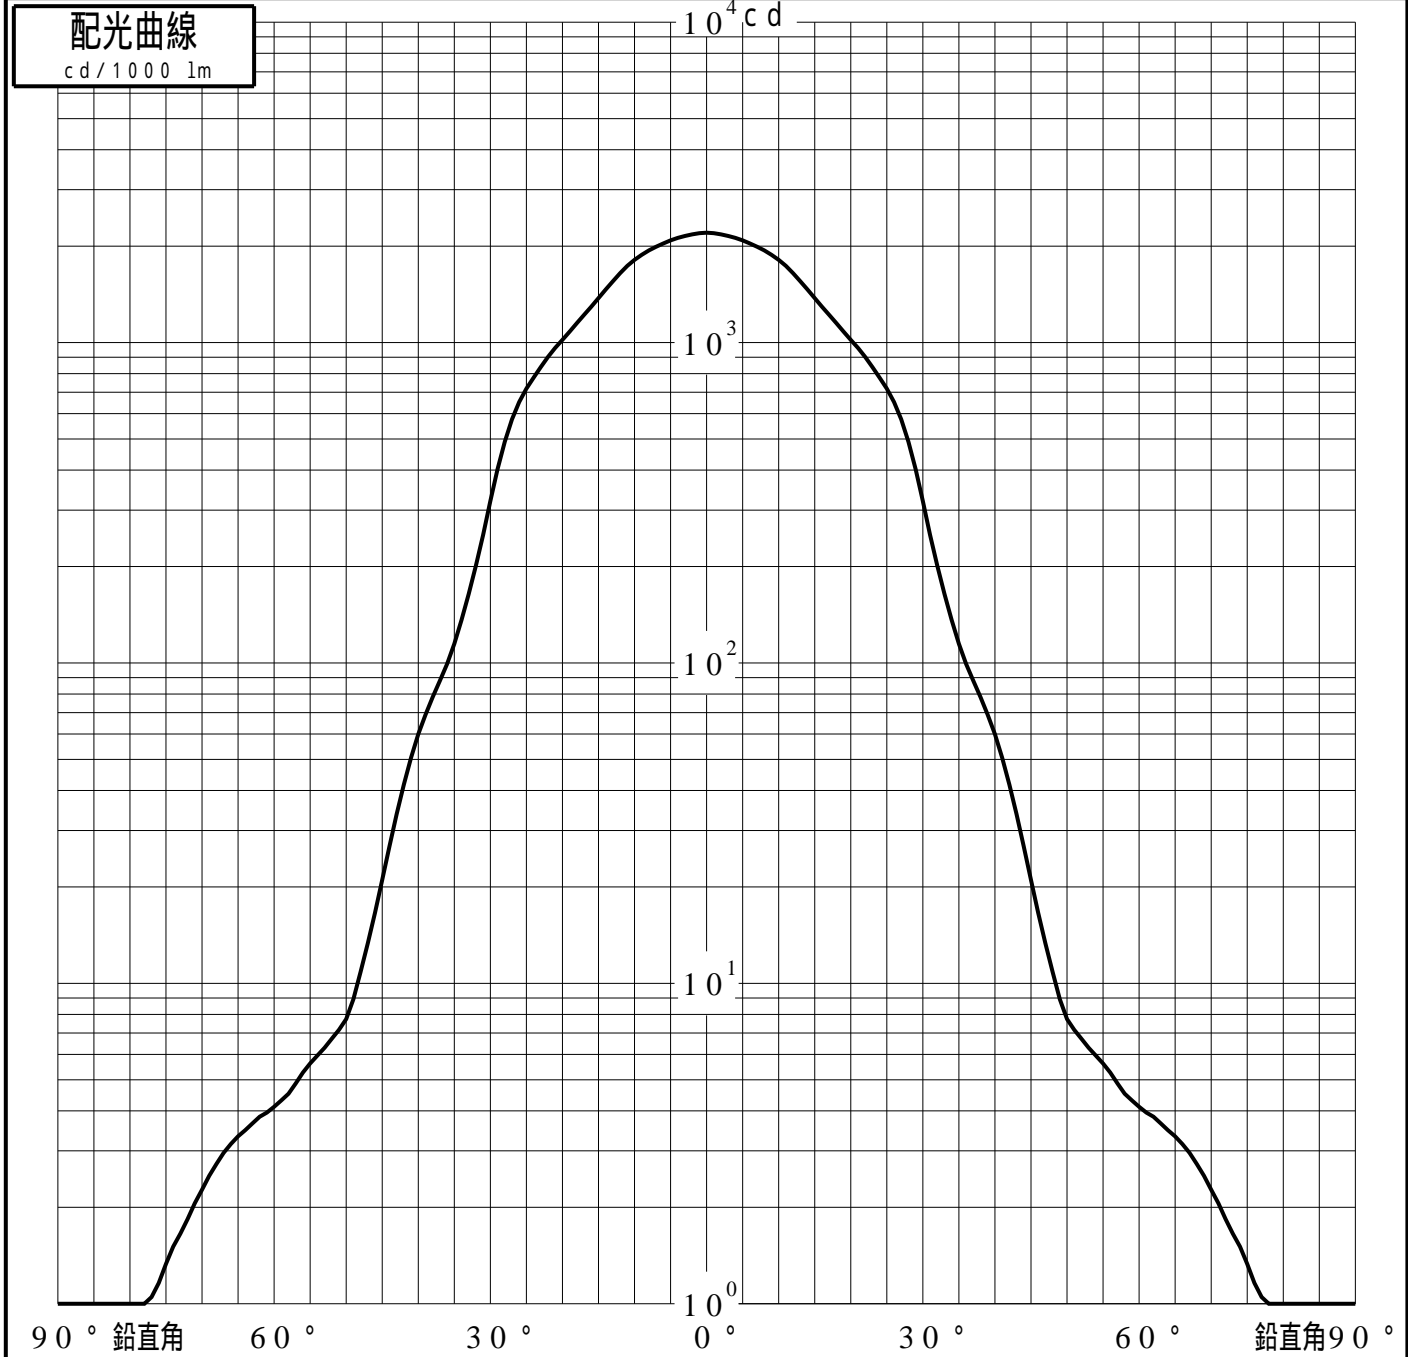

投光照明器具特性

品番 (品名)	NYT1033NK+NYK50000	光源	LED5000_70_3040 ×1
管理番号	K0165405(0)DJ1 TF		

累積光束曲線

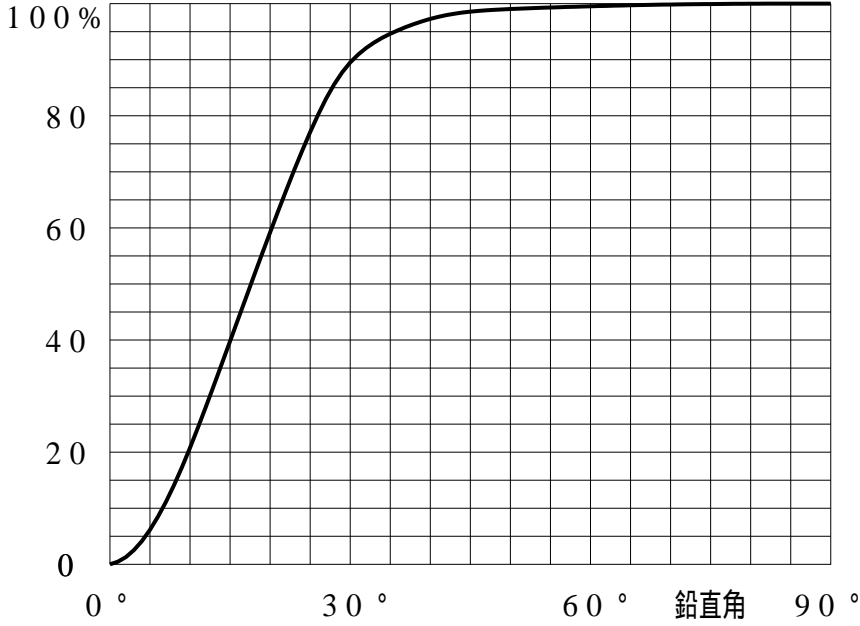

等光度曲線

(座標系)
cd/1000 lm



最大光度 cd/1000 lm