


投光照明器具特性

品名(品番)	NYS12517K+NYK41205	
光源	LED5000_85_34500 x1	34500.0 lm
管理番号	K0169923(0)DJ1 XY	


配光の区分・種類	非対称配光	主ビ-ム効率	%		
器具点灯角度		ビ-ム範囲	$I_0 / 2$	$I_0 / 10$	$I_0 / 20$
器具効率	100.0 %	ビ-ム効率	40.0%	68.9%	73.7%
最大光度	9139 cd/1000 lm	ビ-ム角	AA' 15.7 BB' 15.9	27.6 27.4	33.5 33.4

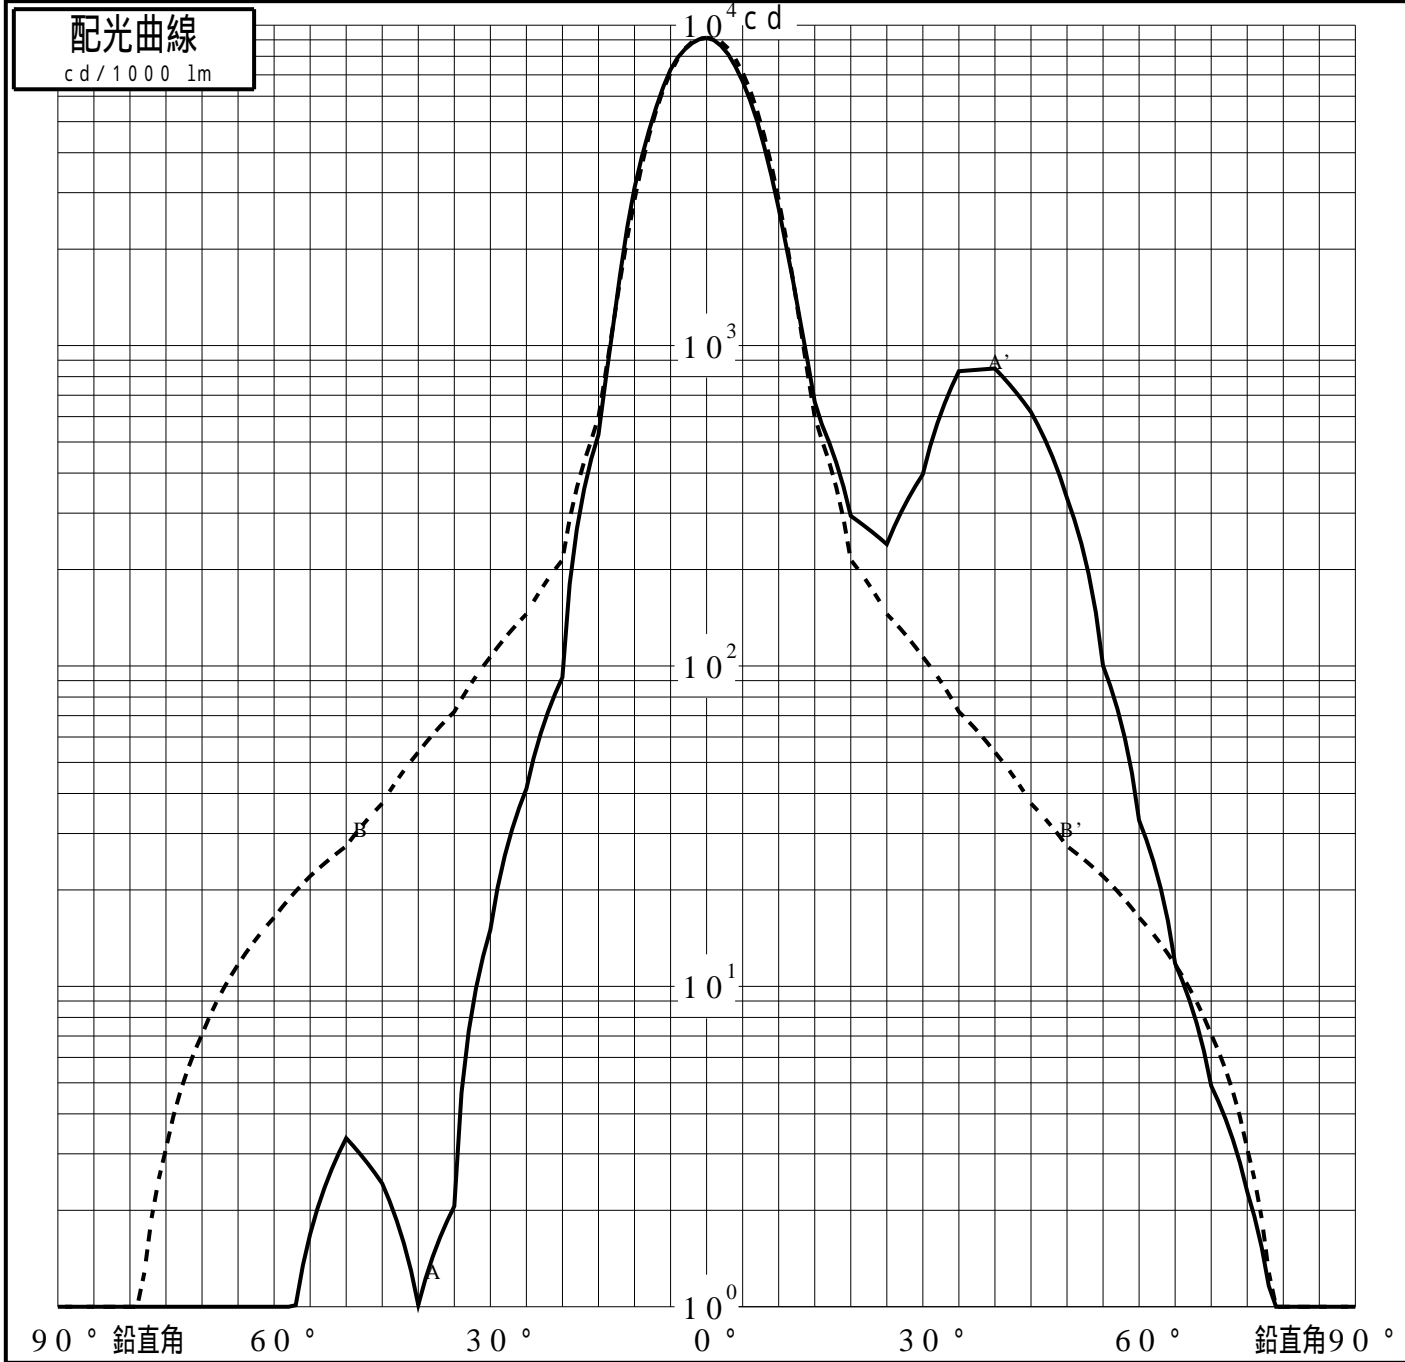

投光照明器具特性

品番 (品名)	NYS12517K+NYK41205	光源	LED5000_85_34500 ×1
管理番号	K0169923(0)DJ1 XY		

累積光束曲線

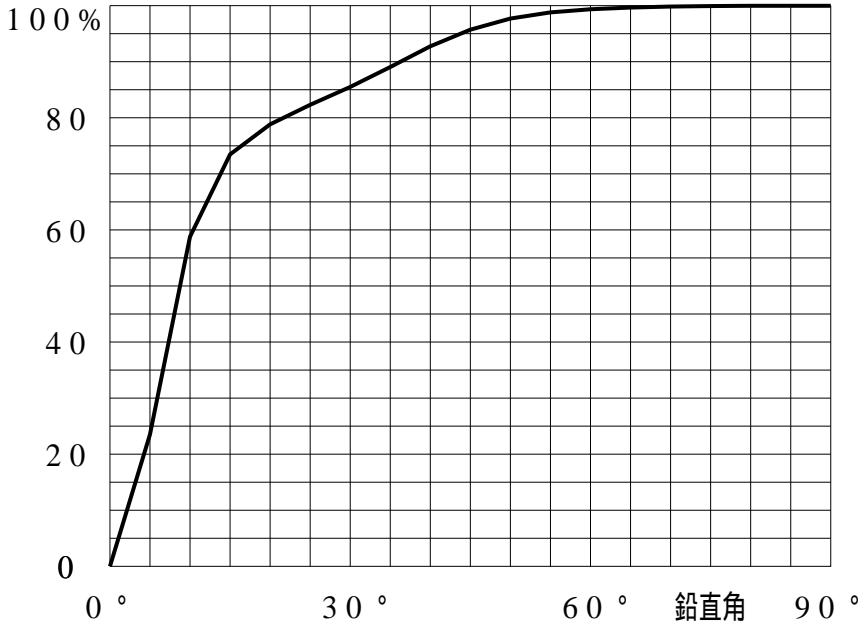

等光度曲線

(座標系)
cd/1000 lm

