



# 投光照明器具特性



品名(品番)	NTS63510W+NTS90351(17DEG)					
光源	LED5000_70_2110 x1 2110.0 lm					
管理番号	K0169069(2)DJ1 TF					
配光の区分・種類	軸対称配光 狭角形	主ビ-ム効率	82.7%			
器具点灯角度		ビ-ム範囲	$I_0 / 2$	$I_0 / 10$	$I_0 / 20$	
器具効率	100.0%	ビ-ム効率	49.9%	82.6%	87.7%	
最大光度	9494 cd/1000 lm	ビ-ム角	17.1	30.0	34.9	

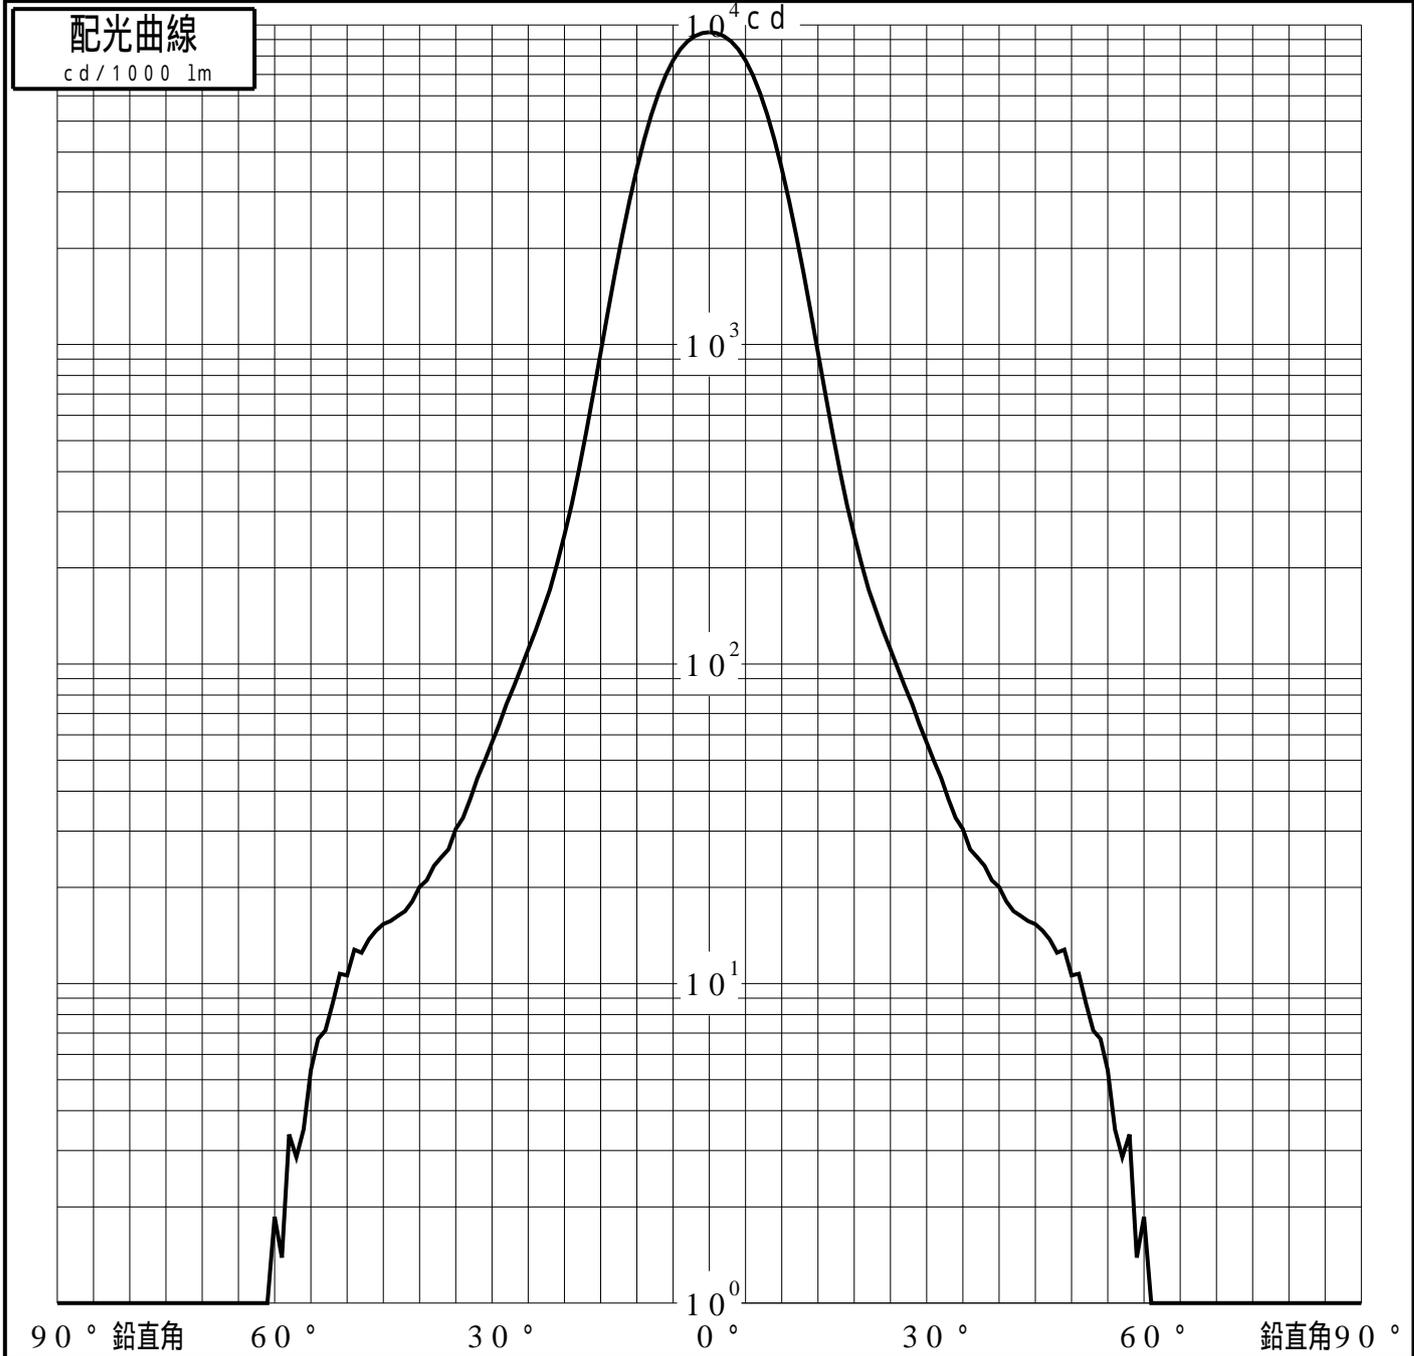

# 投光照明器具特性

品番 (品名)	NTS63510W+NTS90351(17DEG)	光源	LED5000_70_2110 ×1
管理番号	K0169069(2)DJ1 TF		

## 累積光束曲線

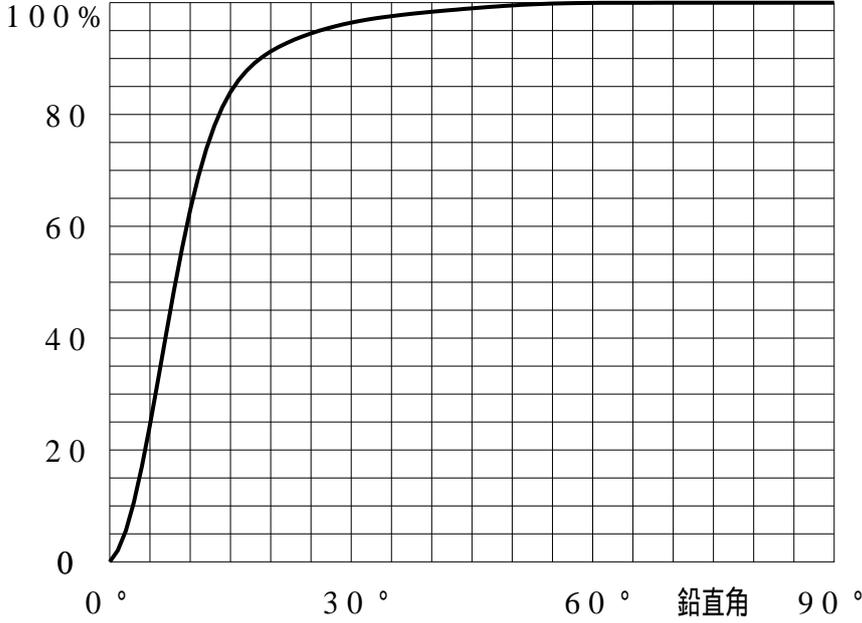

## 等光度曲線

(座標系)  
cd/1000 lm

