


屋外照明器具特性

品番(品名)	XYG2021N+NYK20005																		
光源	LED5000_85_1135 ×1 1135.0 lm																		
管理番号	K0162177(0)DB1																		
JISC8131-1999 による配光形式																			
器具効率 上方光束 下方光束	99.8%			直下光度			717.6 cd/1000lm												
	0.8%			最大光度			717.6 cd/1000lm												
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	717	672	541	414	417	482	520	525	494	446	383	315	249	188	138	94	59	28	10
90°	717	704	688	654	577	462	353	242	125	73	54	45	37	30	23	14	8	5	0
180°	717	709	660	502	315	255	265	239	122	19	4	0	0	0	0	0	0	0	0
270°	717	704	688	654	577	462	353	242	125	73	54	45	37	30	23	14	8	5	0
I _{max} を含む鉛直面	717	672	541	414	417	482	520	525	494	446	383	315	249	188	138	94	59	28	10

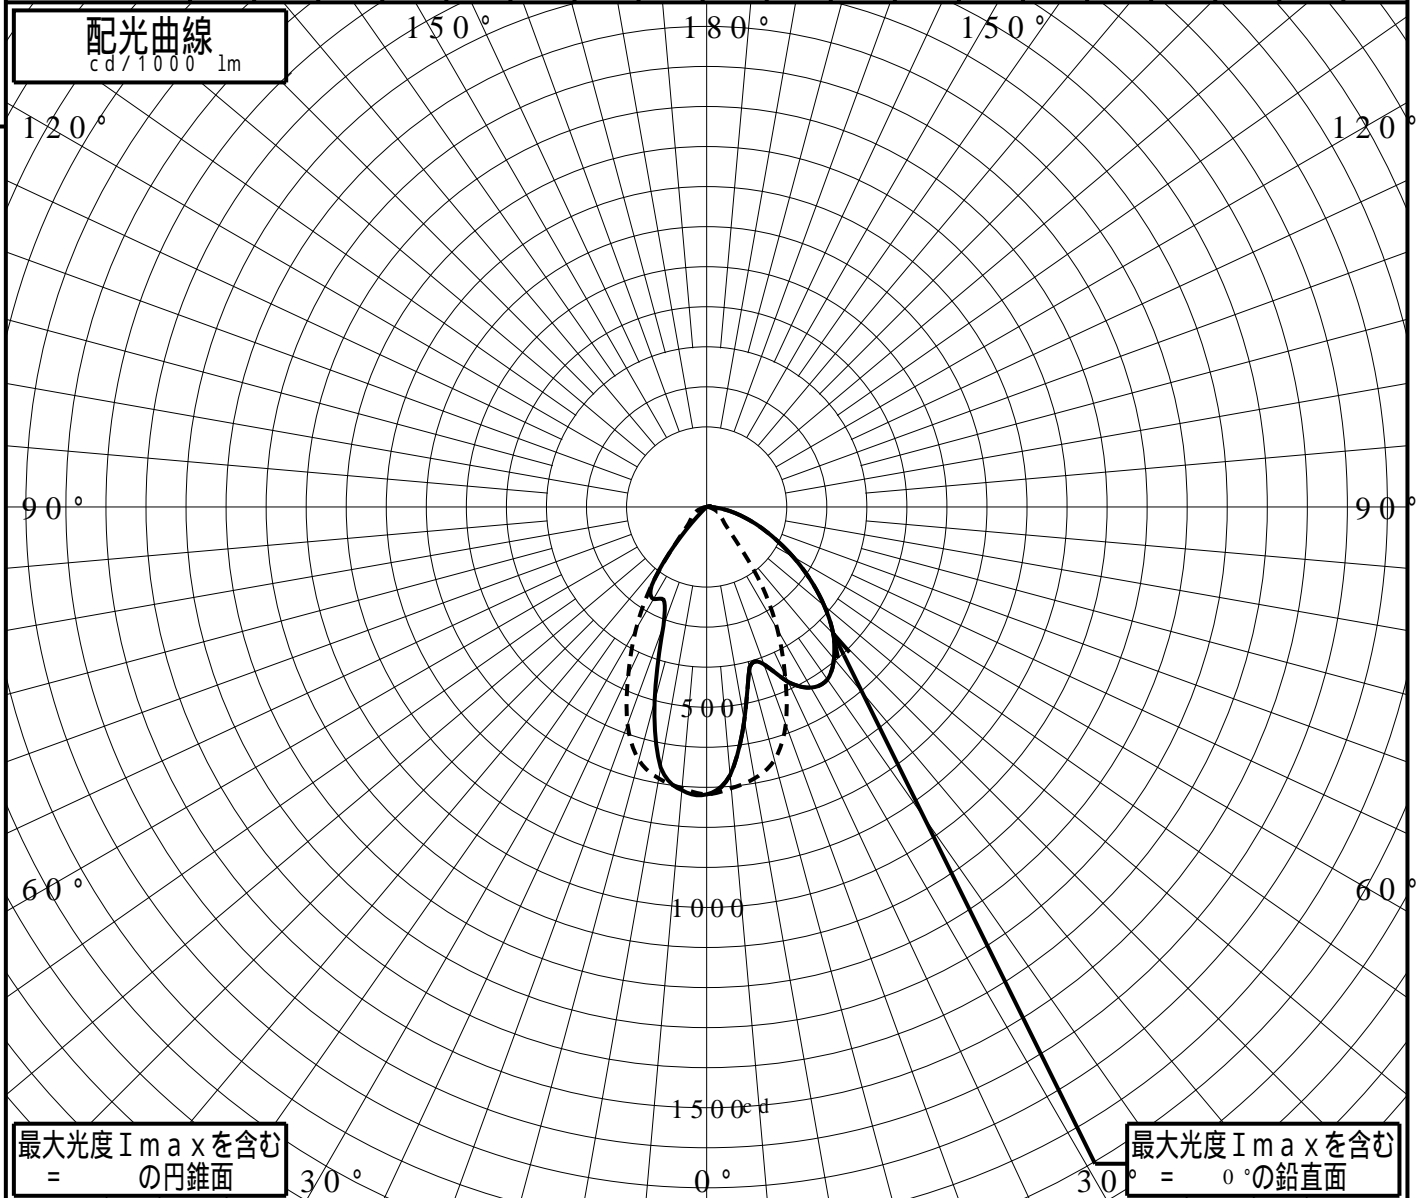

正弦等光度曲線

品番 (品名)	XYG2021N+NYK20005	光源	LED5000_85_1135 ×1
管理番号	K0162177(0)DB 1		

