


投光照明器具特性

品名(品番)	NYT1074N+NYK50010	
光源	LED5000_70_4340 x1	4340.0 lm
管理番号	K0165292(0)DJ1 TF	


配光の区分・種類	軸対称配光 広角形	主ビ-ム効率	93.7%		
器具点灯角度		ビ-ム範囲	$I_0 / 2$	$I_0 / 10$	$I_0 / 20$
器具効率	100.0 %	ビ-ム効率	70.9%	91.2%	95.0%
最大光度	1252 cd/1000 lm	ビ-ム角	55.9	83.4	94.2

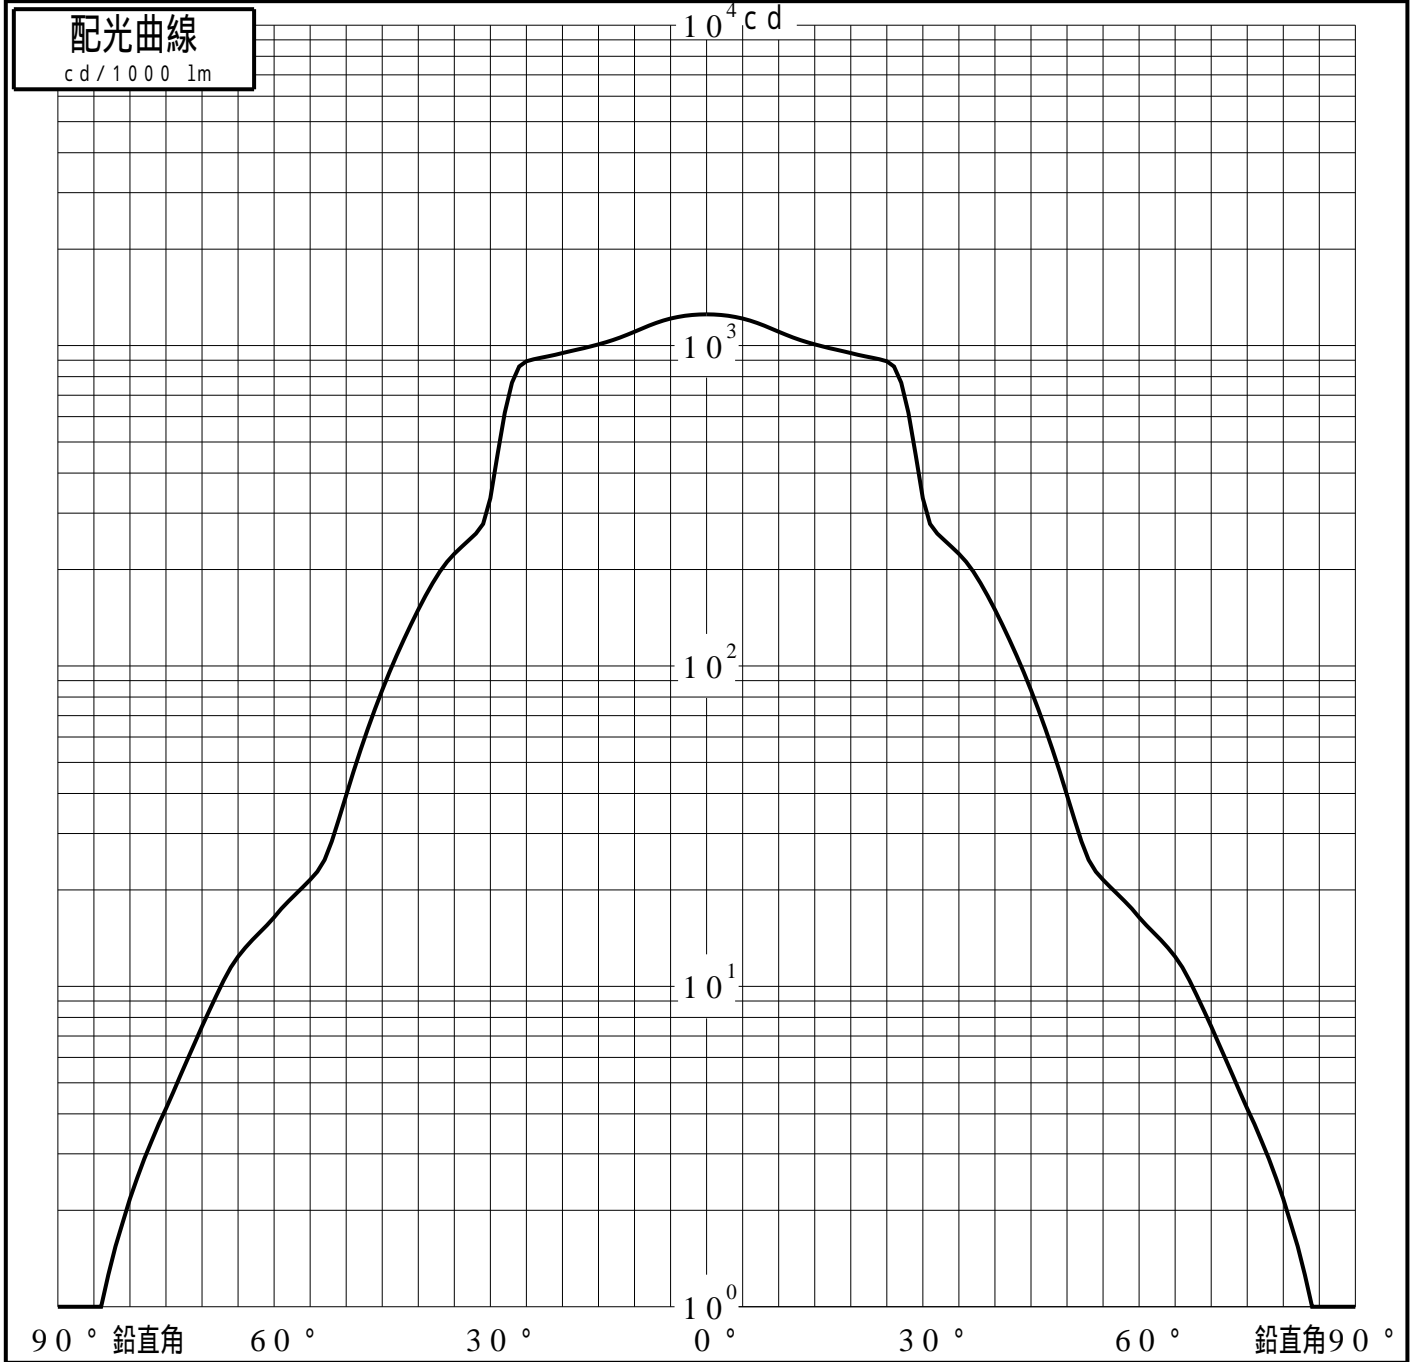

投光照明器具特性

品番(品名)	NYT1074N+NYK50010	光源	LED5000_70_4340 ×1
管理番号	K0165292(0)DJ1 TF		

累積光束曲線

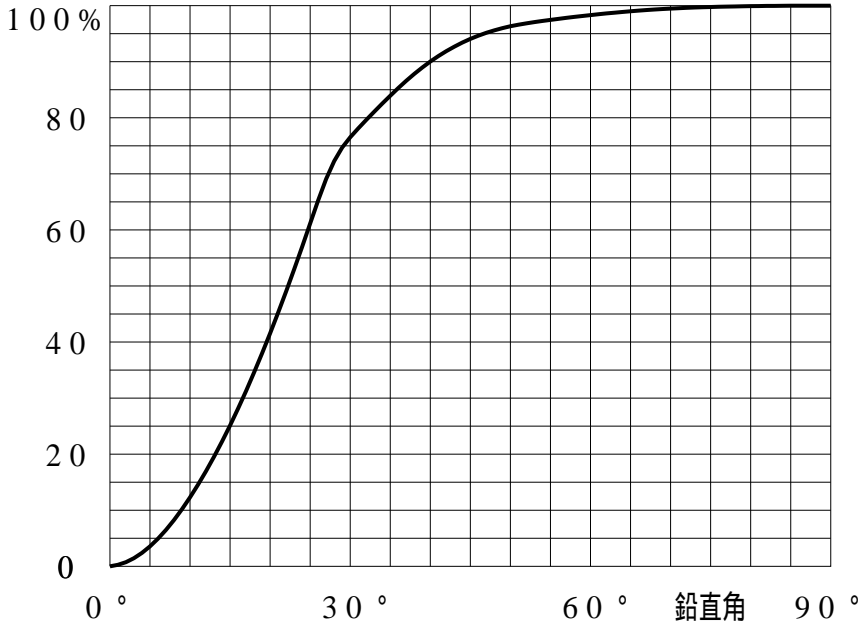

等光度曲線

(座標系)
cd/1000 lm



最大光度 cd/1000 lm