

# 投光照明器具特性

品名(品番)	NYY65940+NYY91300S+NTS90	
光源	LED5000_70_1895 ×1	1895.0 lm
管理番号	K0165075(0)DJ1 XY	


配光の区分・種類	非対称配光	主ビ-ム効率	%		
器具点灯角度		ビ-ム範囲	$I_0 / 2$	$I_0 / 10$	$I_0 / 20$
器具効率	100.0 %	ビ-ム効率	52.0%	92.8%	97.4%
最大光度	1732 cd/1000 lm	ビ-ム角	AA' 36.9 BB' 49.3	67.4 84.9	77.8 94.5



# 投光照明器具特性

品番(品名)	NY65940+NY91300S+NTS90	光源	LED5000_70_1895 x1
管理番号	K0165075(0)DJ1 XY		

## 累積光束曲線

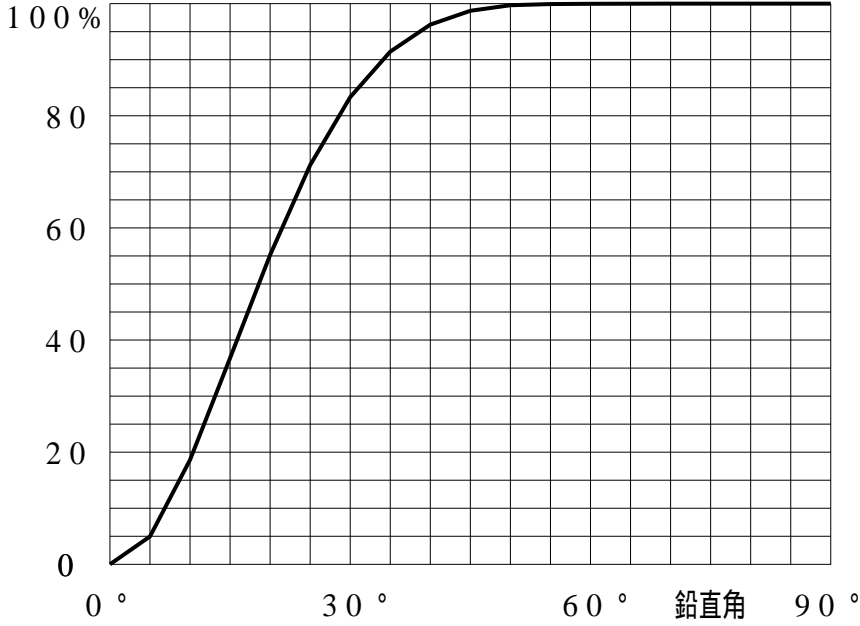

## 等光度曲線

(座標系)  
cd/1000 lm

