



屋外照明器具特性

品番(品名)	XY2886		
光源	LDT6L-G-E17/S/T6 ×1	810.0 lm	
管理番号	K0168149(1)DB1		

JISC8131-1999
による配光形式

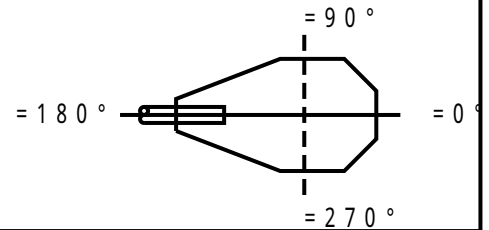

器具効率	64.4%		直下光度	0.0 cd/1000lm															
	上方光束	32.1%		最大光度	71.4 cd/1000lm														
下方光束	32.3%																		
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	0	0	1	4	10	17	24	31	38	43	49	54	58	62	65	68	69	71	71
90°	0	0	1	4	10	17	24	31	38	43	49	54	58	62	65	68	69	71	71
180°	0	0	1	4	10	17	24	31	38	43	49	54	58	62	65	68	69	71	71
270°	0	0	1	4	10	17	24	31	38	43	49	54	58	62	65	68	69	71	71
I _{max} を含む鉛直面	0	0	1	4	10	17	24	31	38	43	49	54	58	62	65	68	69	71	71

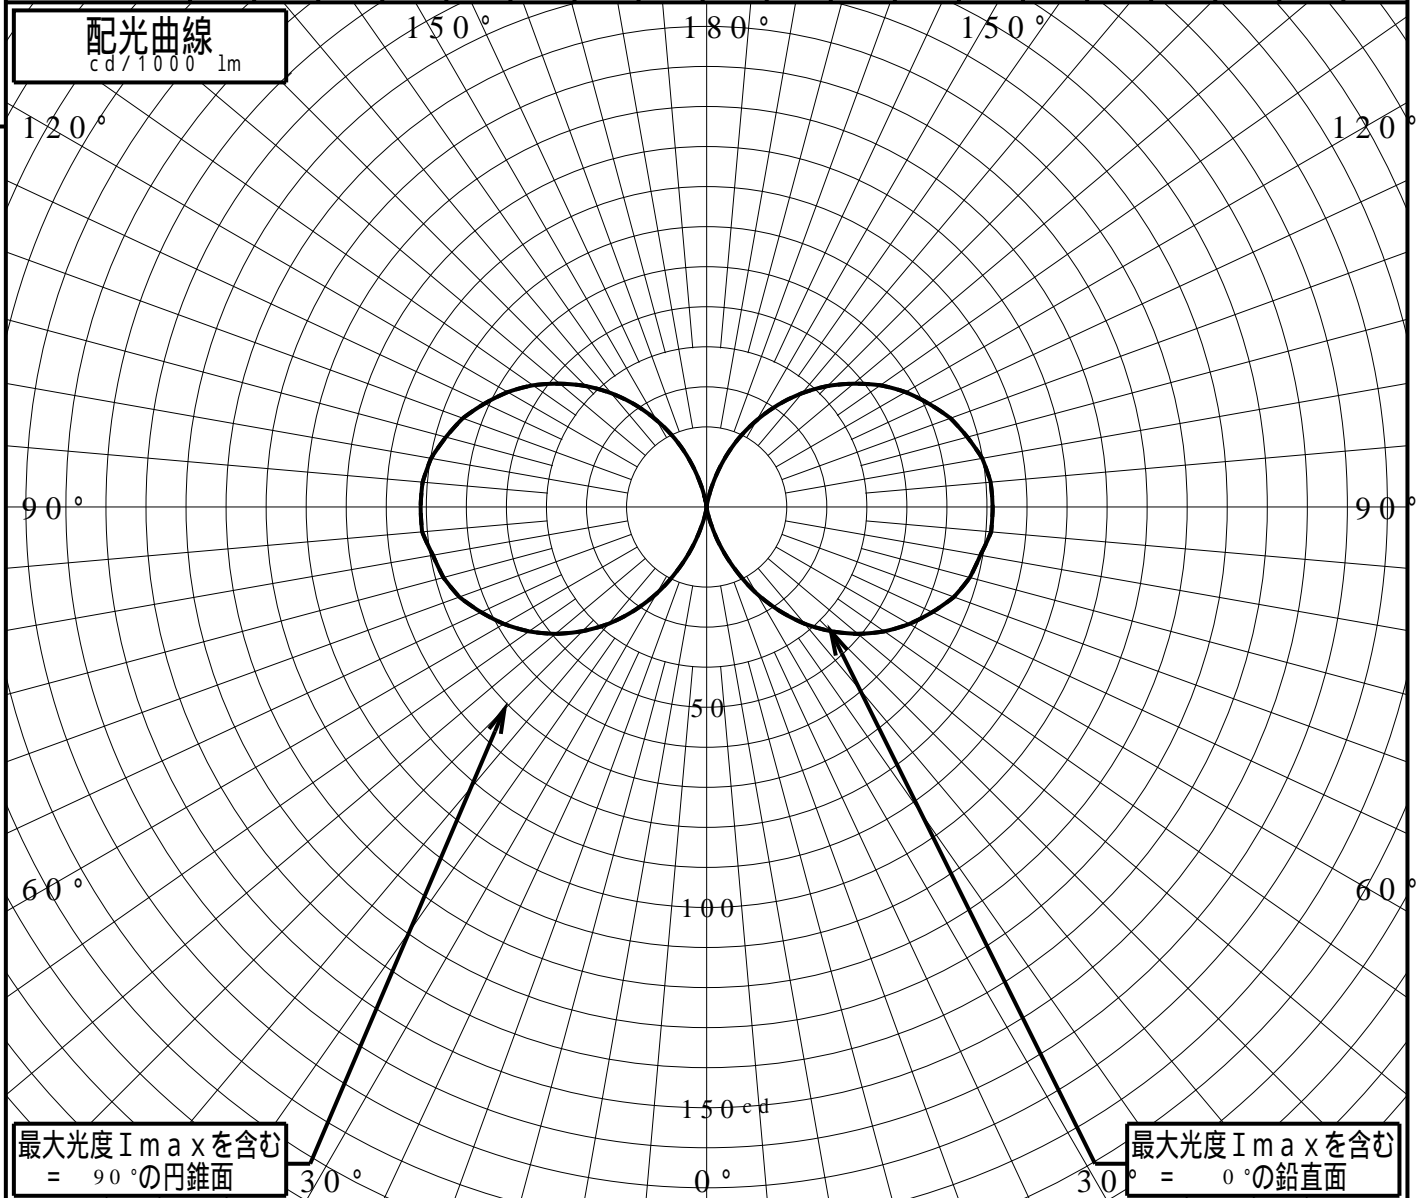


道路・トンネル照明率曲線

品番(品名)	XY2886	光源	LDT6L-G-E17/S/T6 x1
管理番号	K0168149 (1)DB 1		

————— = 0.0°

H: 取付高さ(MOUNTING HEIGHT)

照明率(= 0°)		
幅	歩道側	車道側
0.0H	0.000	0.000
0.2H	0.011	0.011
0.4H	0.023	0.023
0.6H	0.035	0.035
0.8H	0.047	0.047
1.0H	0.059	0.059
1.2H	0.068	0.068
1.4H	0.077	0.077
1.6H	0.084	0.084
1.8H	0.090	0.090
2.0H	0.096	0.096
2.2H	0.100	0.100
2.4H	0.104	0.104
2.6H	0.108	0.108
2.8H	0.111	0.111
3.0H	0.114	0.114
3.2H	0.116	0.116
3.4H	0.118	0.118
3.6H	0.120	0.120

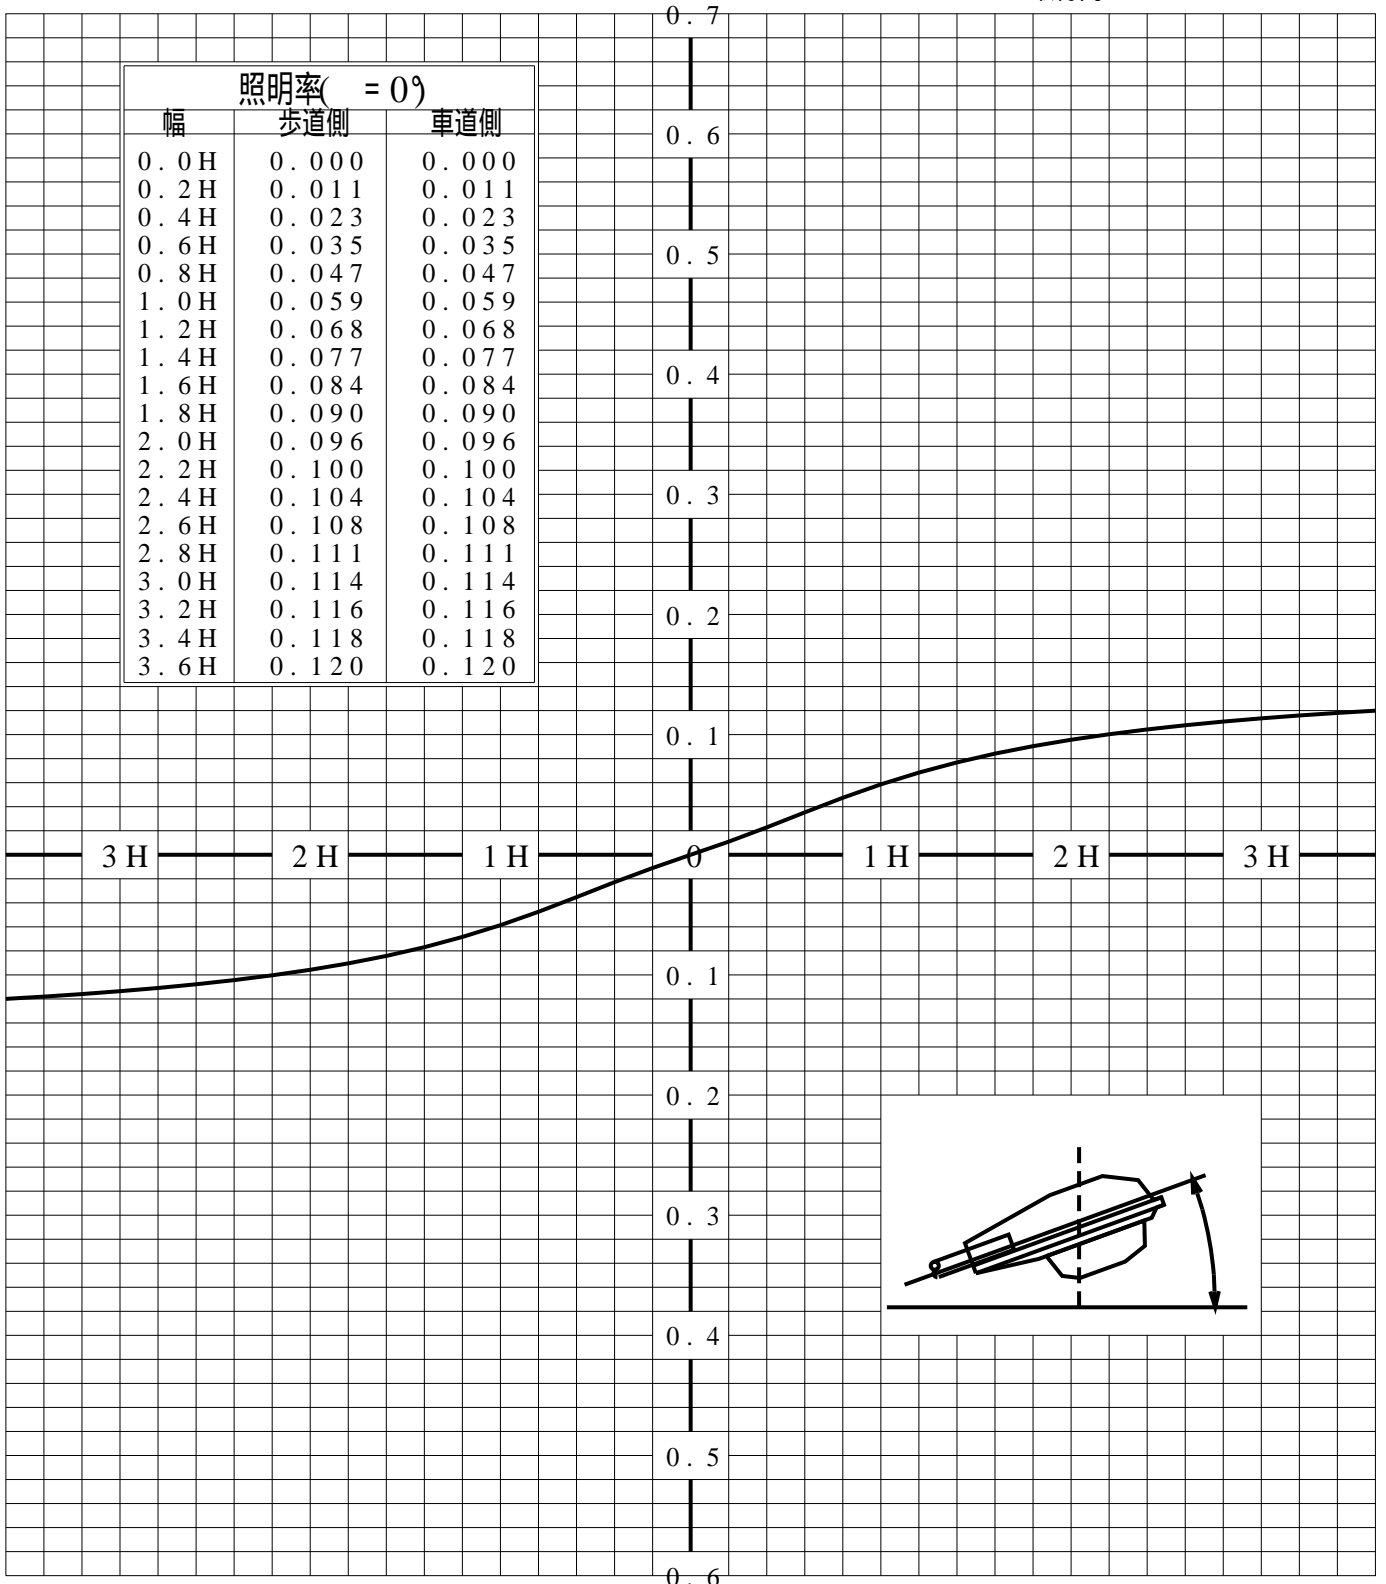

歩道側 ← → 車道側