


屋外照明器具特性

品番(品名)	XYG2202N+NYK20016																		
光源	LED5000_85_3565 ×1 3565.0 lm																		
管理番号	K0178521(1)D 1																		
JISC8131-1999 による配光形式																			
器具効率 上方光束 下方光束	100.0%					直下光度					20.7 cd/1000lm								
	4.1%					最大光度					228.3 cd/1000lm								
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	20	25	35	47	61	78	97	116	134	152	167	179	189	197	199	196	173	85	29
90°	20	26	36	49	64	81	100	119	137	154	169	181	191	197	198	195	167	75	26
180°	20	24	33	44	58	75	93	111	130	147	163	176	186	194	196	195	179	100	33
270°	20	22	31	42	56	72	90	109	128	145	161	174	185	193	197	196	186	123	42
I _{max} を含む鉛直面	20	22	33	46	62	79	98	117	137	157	176	193	208	219	226	228	215	135	43

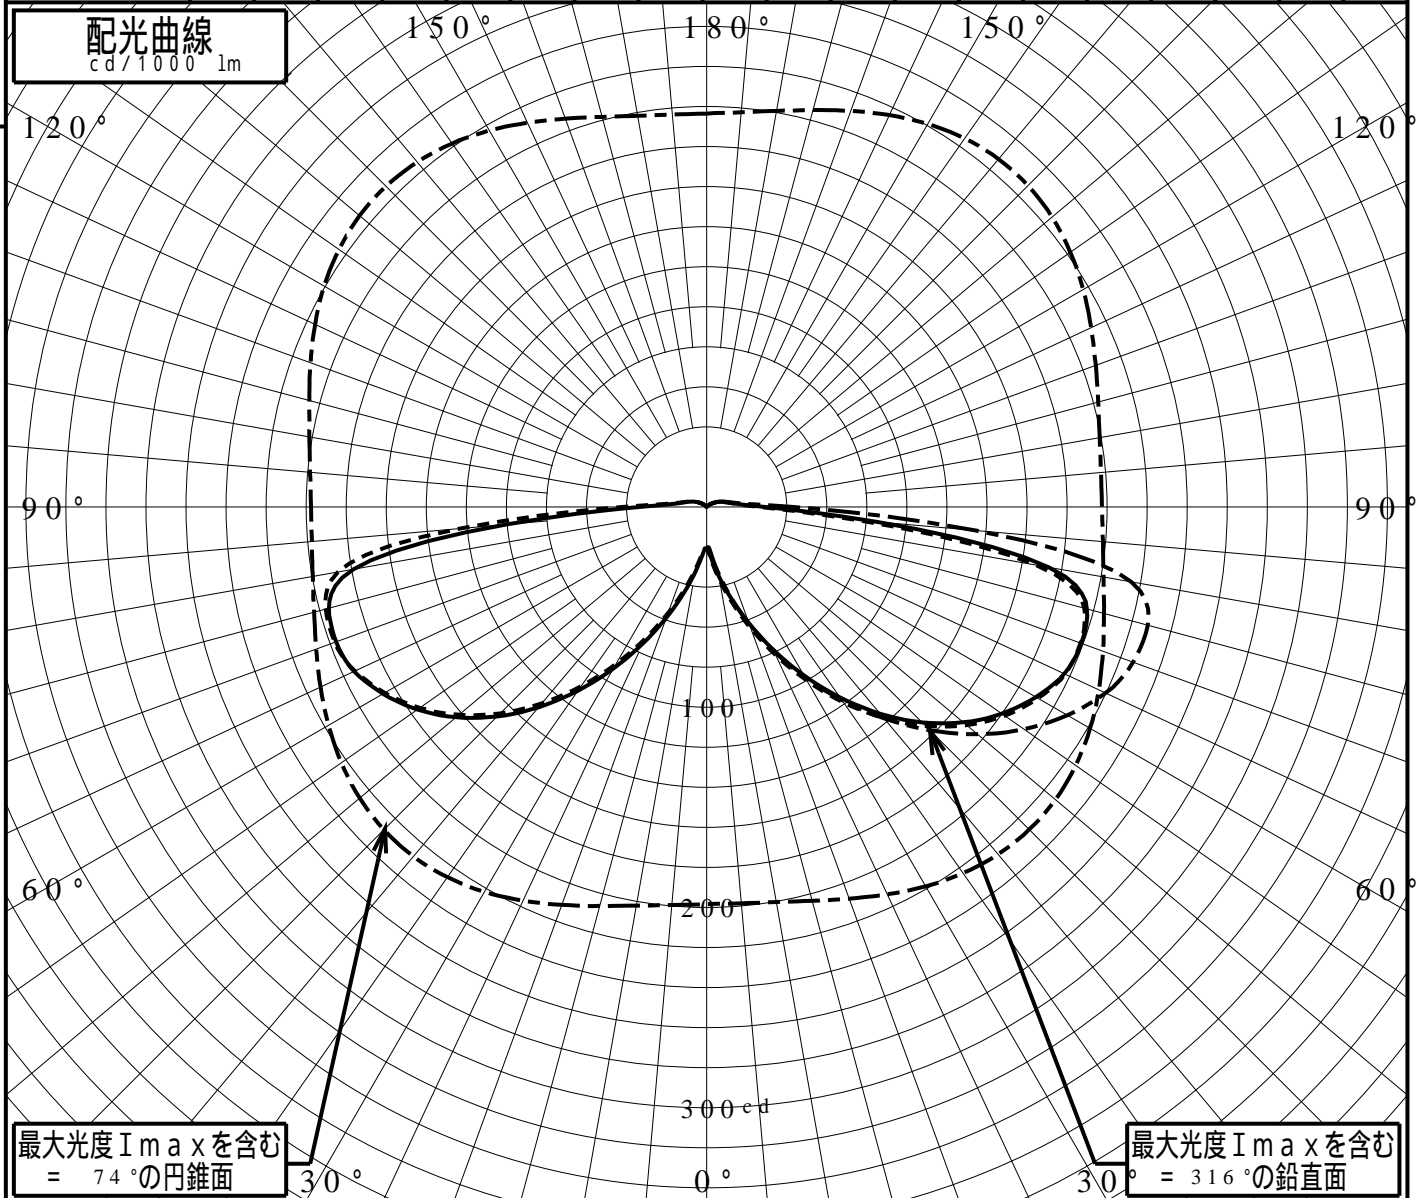


道路・トンネル照明率曲線

品番(品名)	XYG2202N+NYK20016	光源	LED5000_85_3565 ×1
管理番号	K0178521 (1)D 1		

————— = 0.0°


H: 取付高さ(MOUNTING HEIGHT)

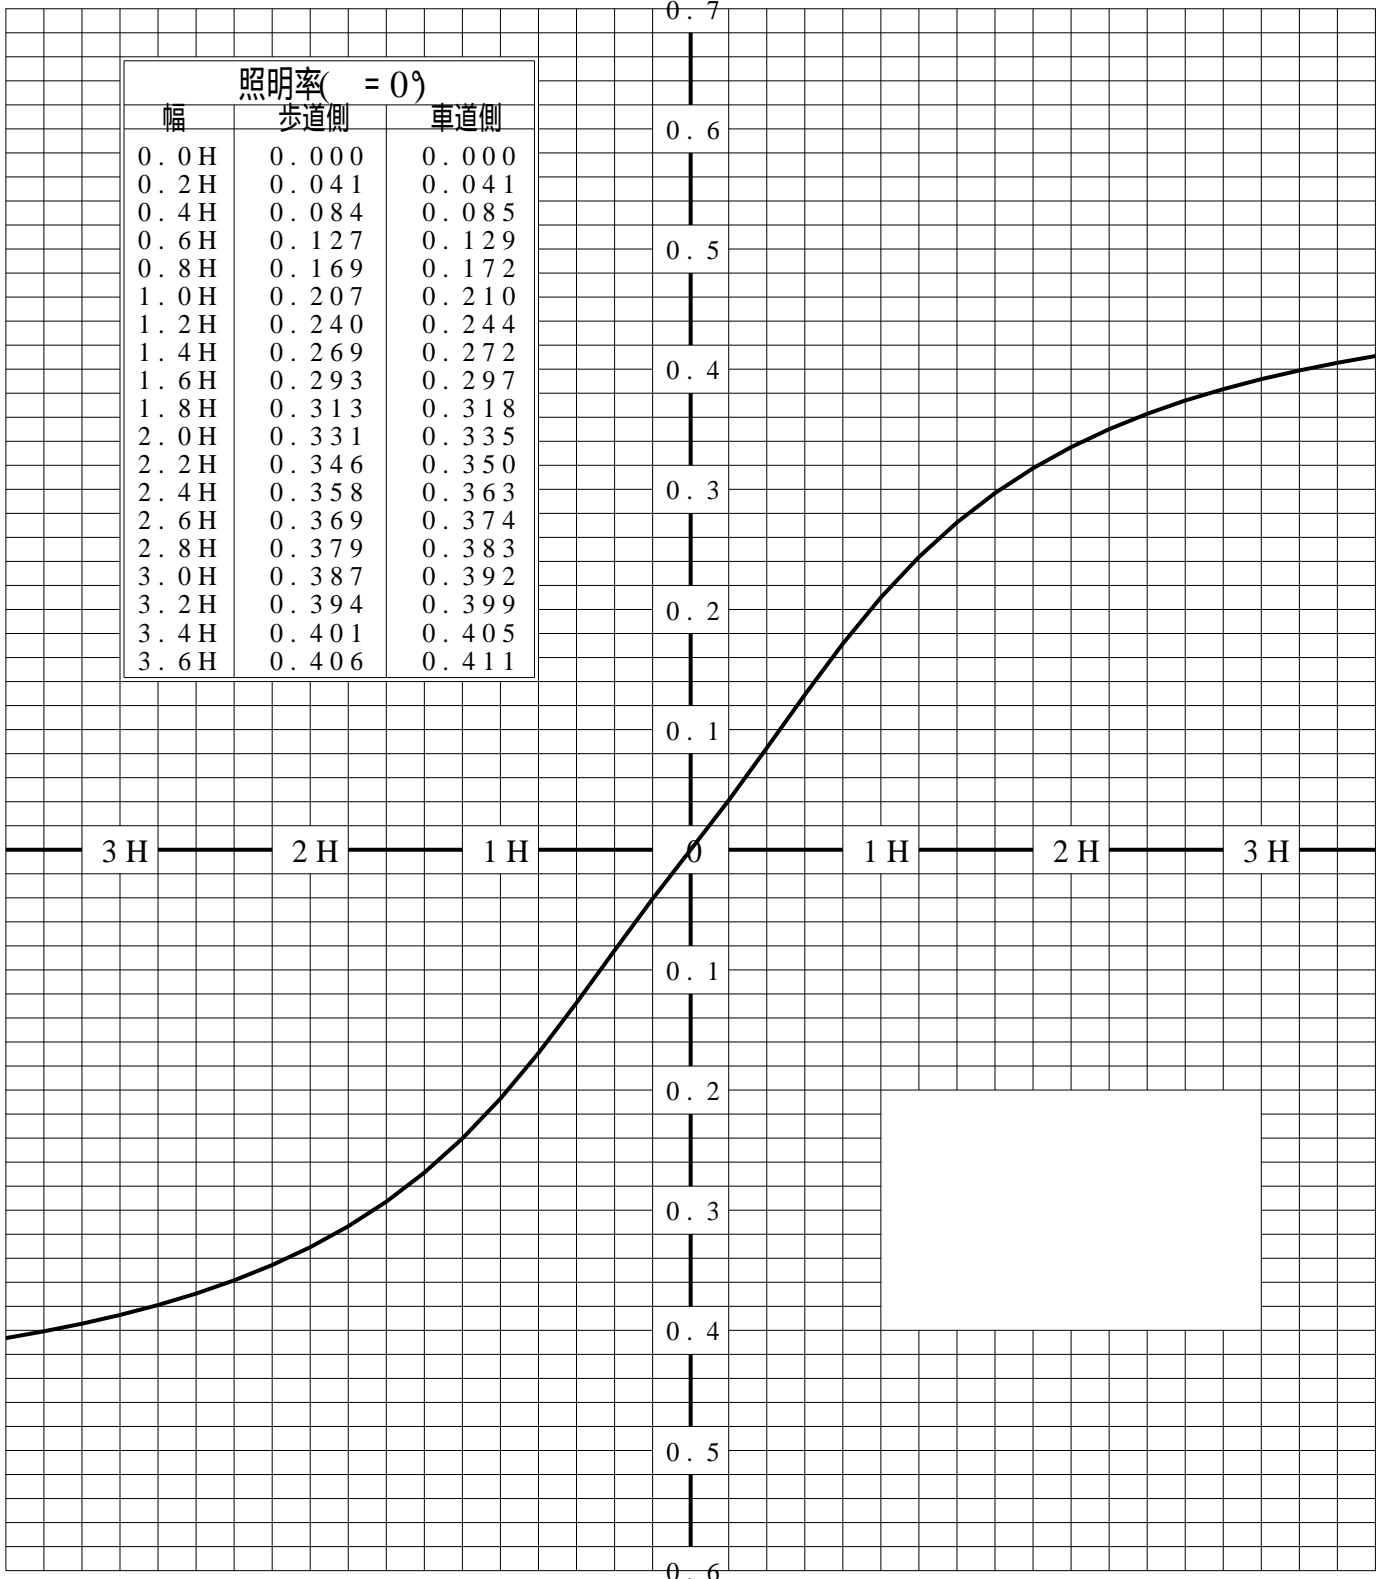

歩道側 ← → 車道側

正弦等光度曲線

品番 (品名)	XYG2202N+NYK20016	光源	LED5000_85_3565 ×1
管理番号	K0178521(1)D 1		

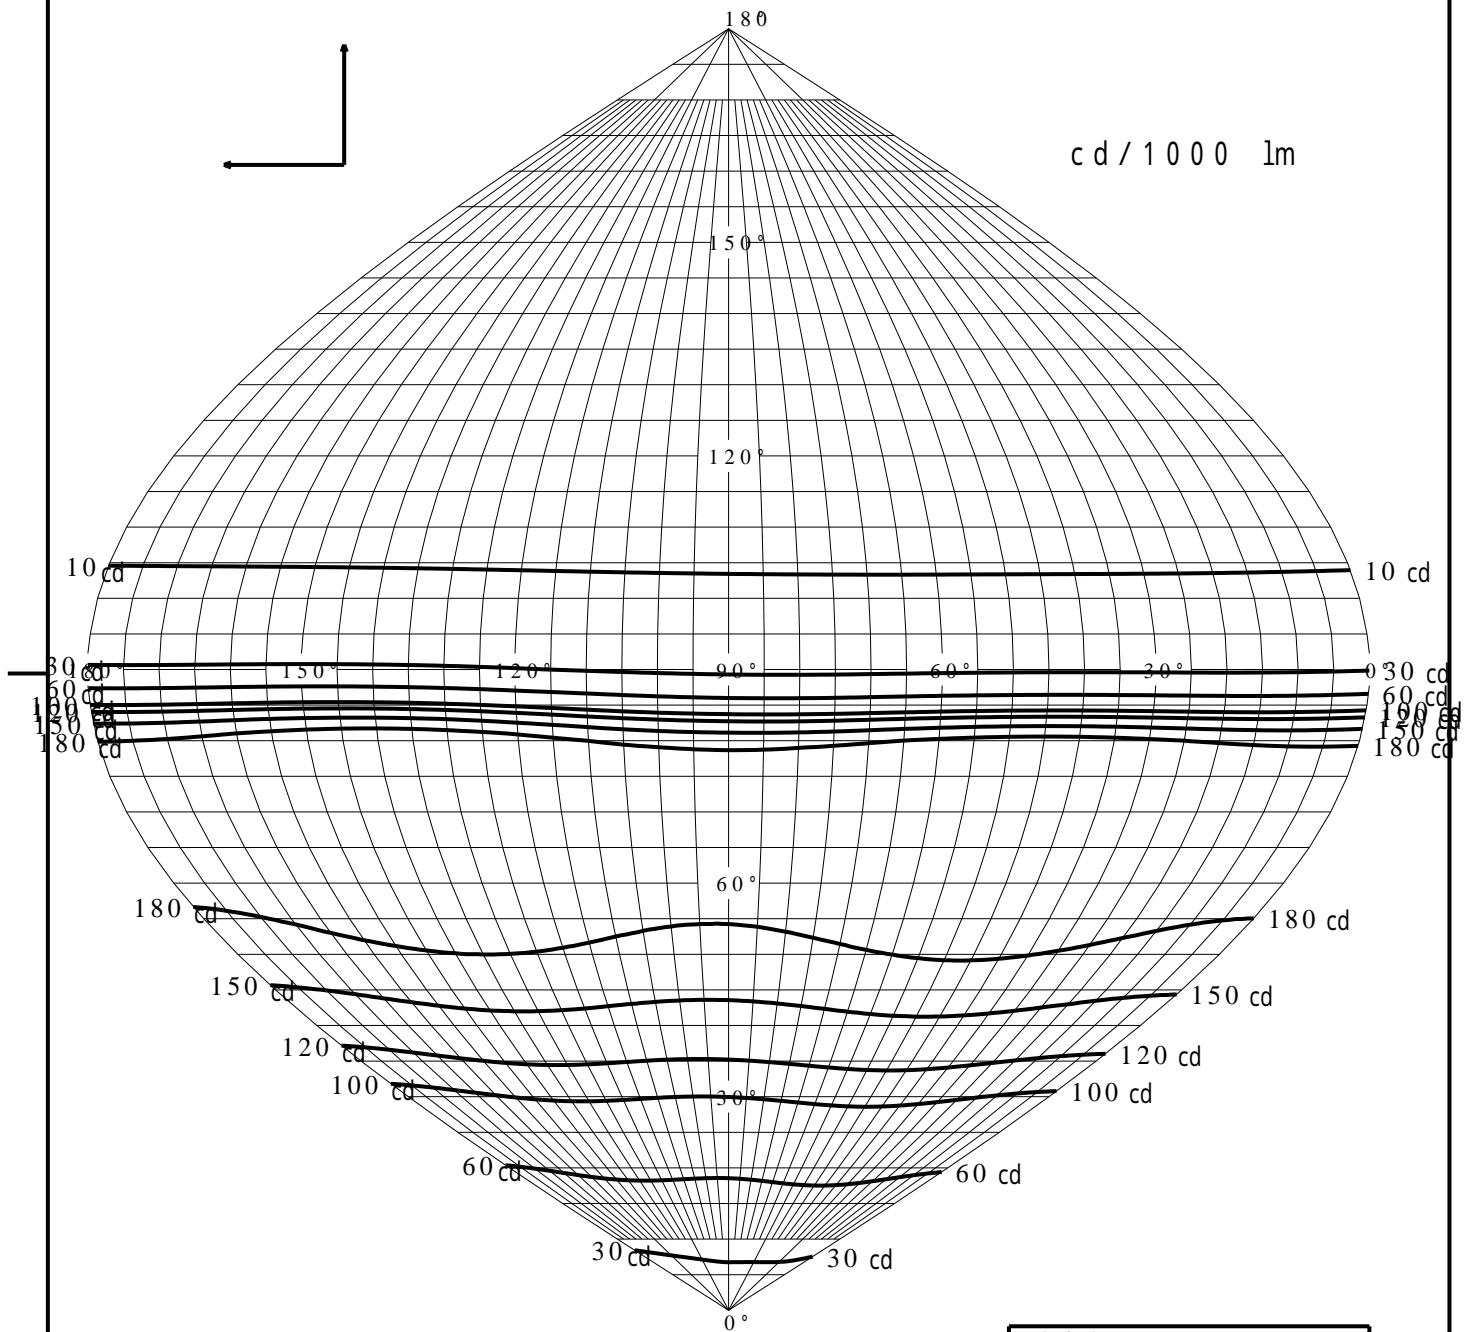

最大光度 I_{max} 228.3 cd

直下光度 I_0 20.7 cd

