


屋外照明器具特性

品番(品名)	XY2894		
光源	LDT6L-G-E17/S/T6 ×1	810.0 lm	
管理番号	K0168151(1)DB1		

JISC8131-1999 による配光形式				
器具効率	49.2%	直下光度	0.0 cd/1000lm	
上方光束 下方光束	23.6% 25.5%	最大光度	64.2 cd/1000lm	

鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	0	0	0	0	4	9	14	19	24	29	35	40	45	49	54	57	60	63	64
90°	0	0	0	0	4	9	14	19	24	29	35	40	45	49	54	57	60	63	64
180°	0	0	0	0	4	9	14	19	24	29	35	40	45	49	54	57	60	63	64
270°	0	0	0	0	4	9	14	19	24	29	35	40	45	49	54	57	60	63	64
I _{max} を含む鉛直面	0	0	0	0	4	9	14	19	24	29	35	40	45	49	54	57	60	63	64

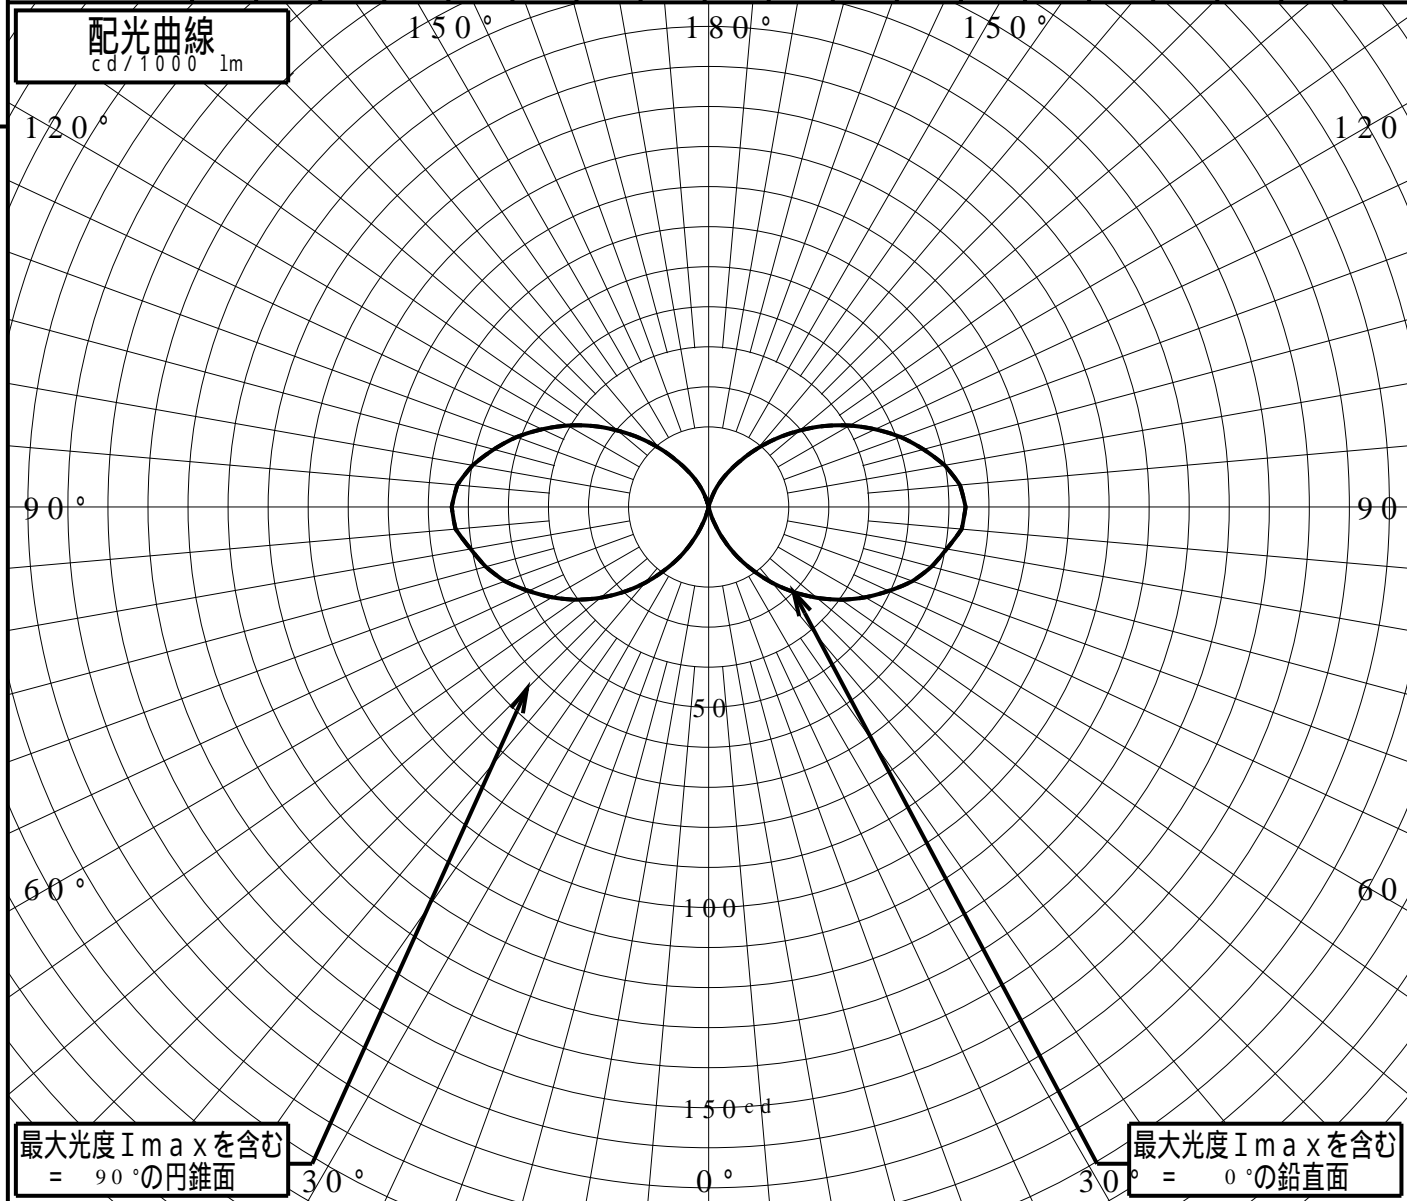


道路・トンネル照明率曲線

品番(品名)	XY2894	光源	LDT6L-G-E17/S/T6 x1
管理番号	K0168151 (1)DB 1		

————— = 0.0°

H: 取付高さ(MOUNTING HEIGHT)

照明率(= 0°)		
幅	歩道側	車道側
0.0H	0.000	0.000
0.2H	0.008	0.008
0.4H	0.016	0.016
0.6H	0.024	0.024
0.8H	0.033	0.033
1.0H	0.041	0.041
1.2H	0.049	0.049
1.4H	0.055	0.055
1.6H	0.061	0.061
1.8H	0.066	0.066
2.0H	0.071	0.071
2.2H	0.074	0.074
2.4H	0.078	0.078
2.6H	0.081	0.081
2.8H	0.083	0.083
3.0H	0.085	0.085
3.2H	0.087	0.087
3.4H	0.089	0.089
3.6H	0.091	0.091

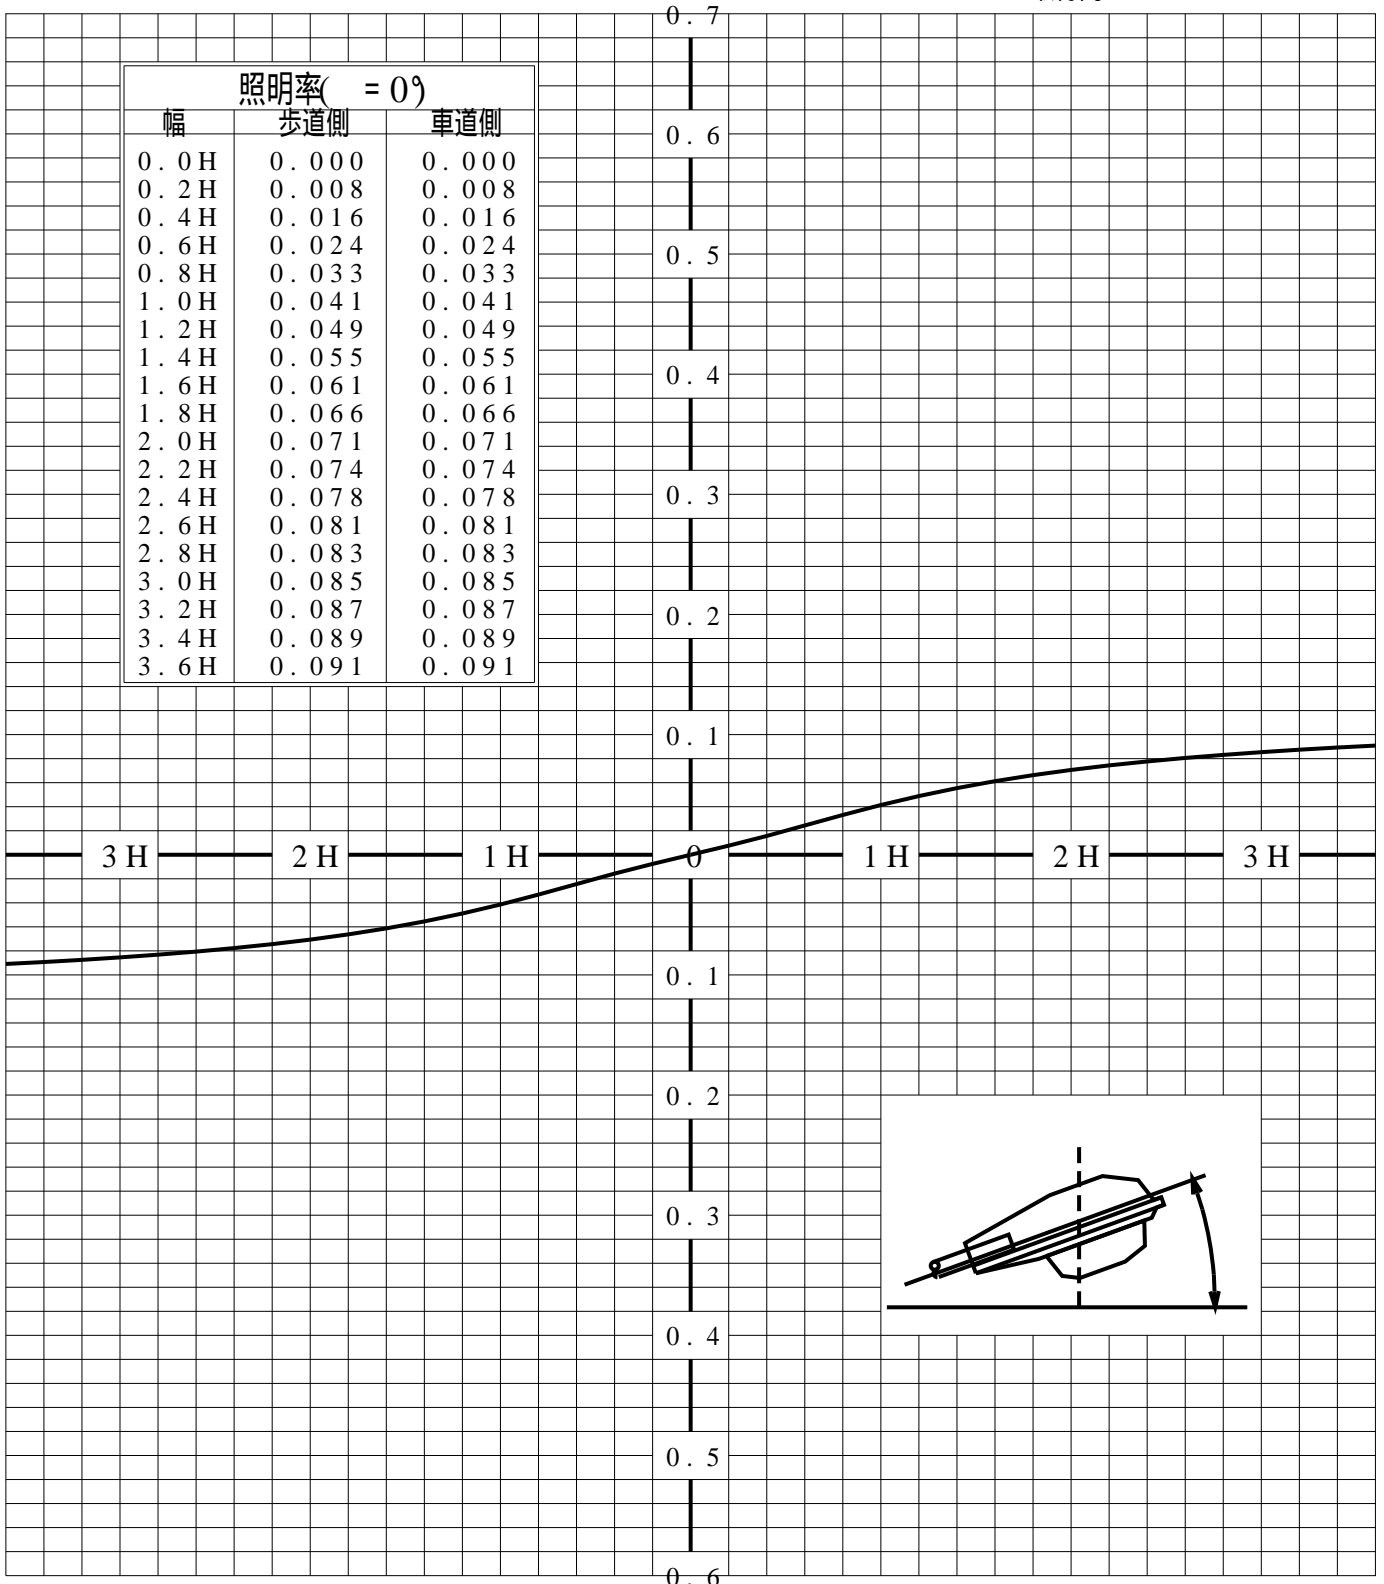

歩道側 ← → 車道側