
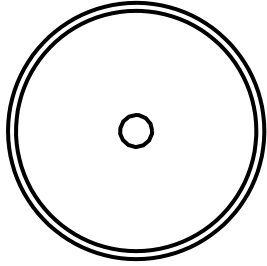


投光照明器具特性


品名(品番)	YYY33164K+YYY95060					
光源	LED3000_70_1610 x1 1610.0 lm					
管理番号	K0181761(0)DJ1 TF					
配光の区分・種類	軸対称配光 中角形	主ビ-ム効率	96.2%			
器具点灯角度		ビ-ム範囲	$I_0 / 2$	$I_0 / 10$	$I_0 / 20$	
器具効率	100.0 %	ビ-ム効率	60.4%	94.7%	97.9%	
最大光度	2718 cd/1000 lm	ビ-ム角	34.7	57.6	62.8	

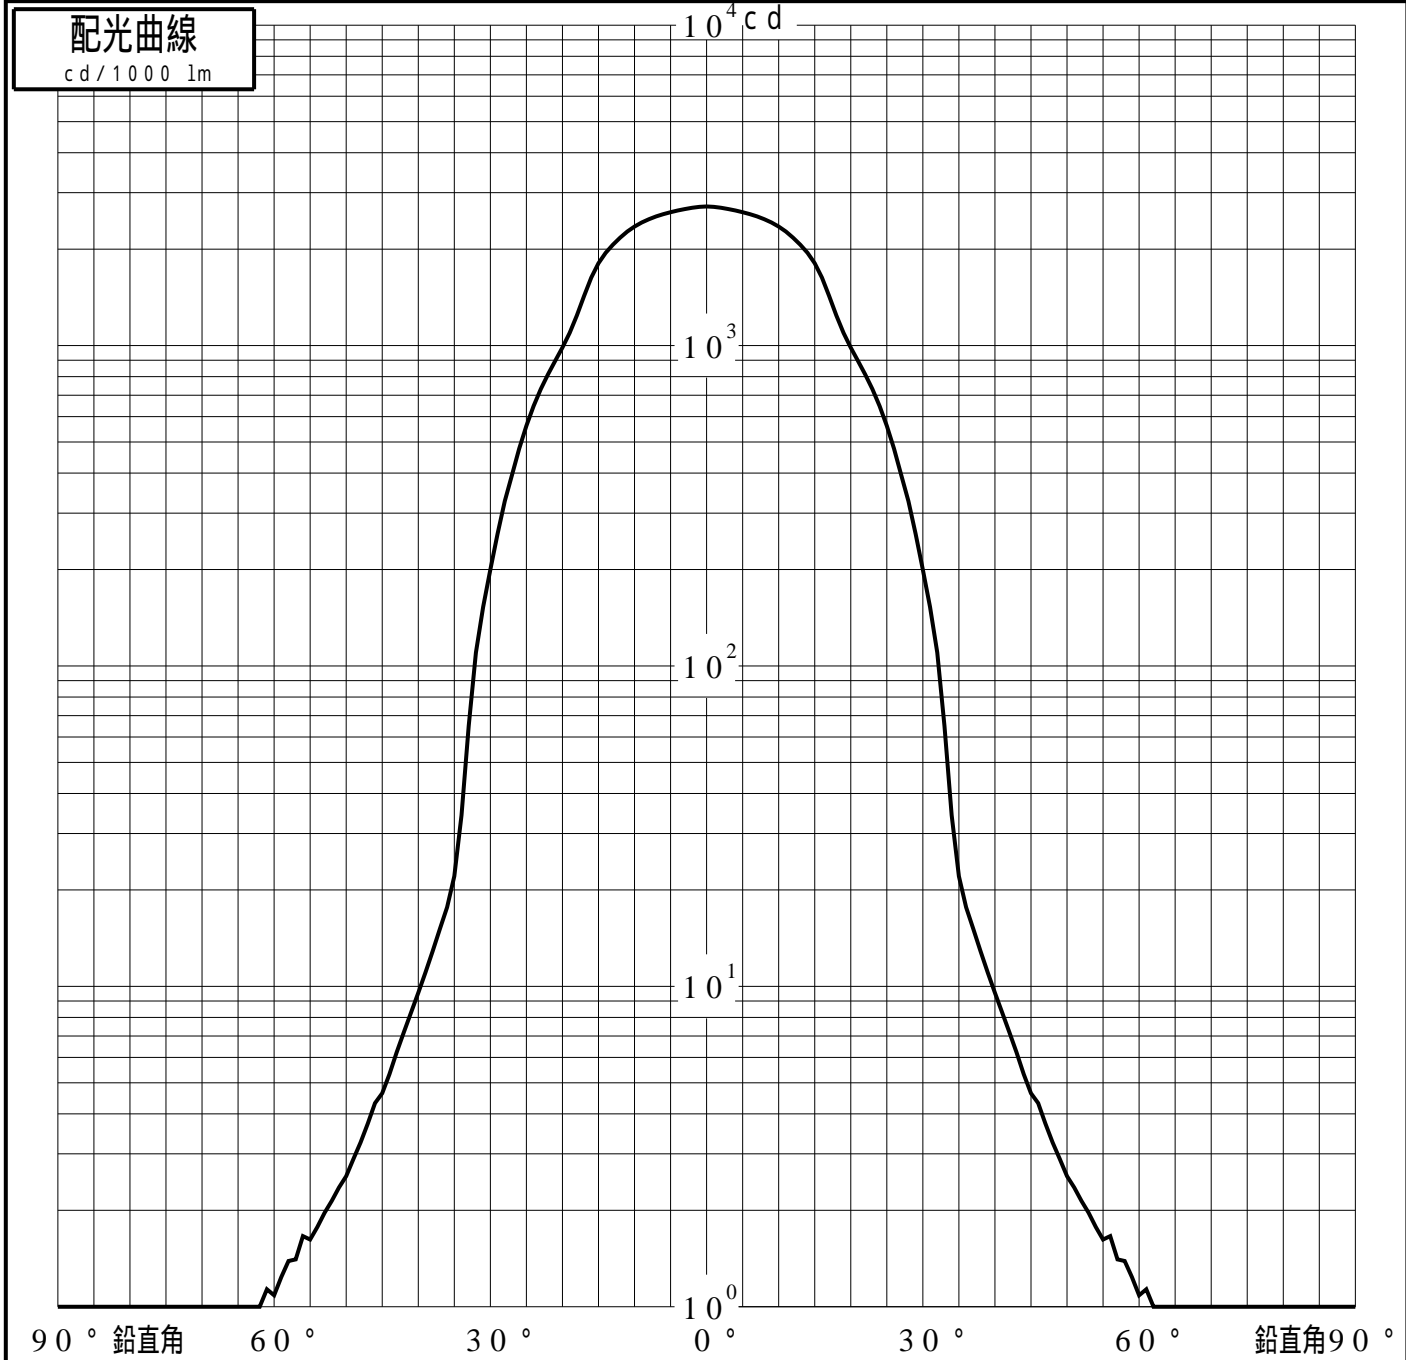

投光照明器具特性

品番(品名)	YYY33164K+YYY95060	光源	LED3000_70_1610 ×1
管理番号	K0181761(0)DJ1 TF		

累積光束曲線

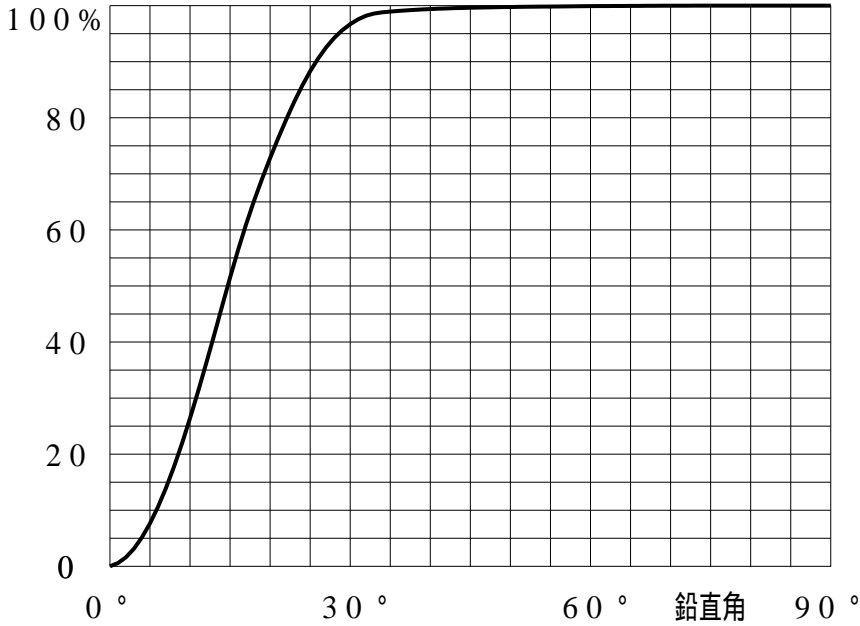

等光度曲線

(座標系)
cd/1000 lm

