


投光照明器具特性

品名(品番)	YYY30724K+YYY95060	
光源	LED3000_70_723 ×1	723.0 lm
管理番号	K0181764(0)DJ1 TF	


配光の区分・種類	軸対称配光 中角形	主ビ-ム効率	96.7%		
器具点灯角度		ビ-ム範囲	$I_0 / 2$	$I_0 / 10$	$I_0 / 20$
器具効率	100.0%	ビ-ム効率	51.9%	92.9%	96.6%
最大光度	3540 cd/1000 lm	ビ-ム角	29.2°	54.2°	59.8°

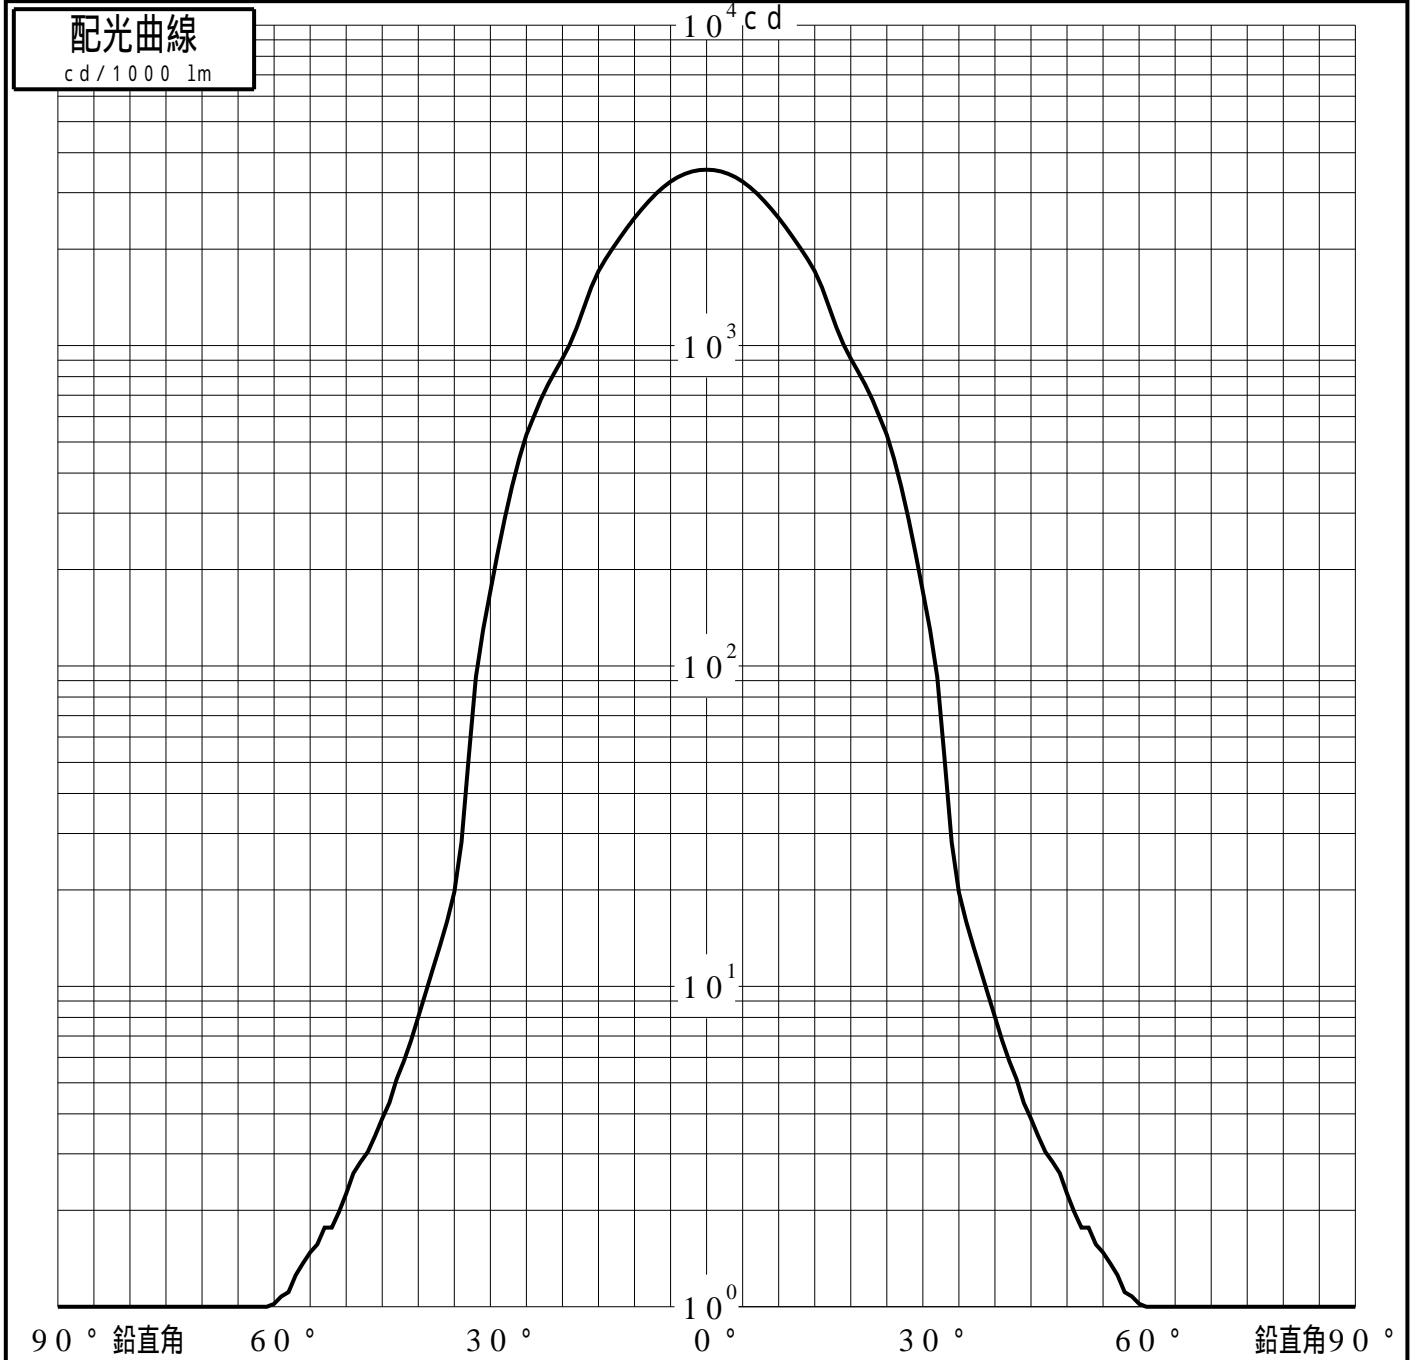

投光照明器具特性

品番(品名)	YYY30724K+YYY95060	光源	LED3000_70_723 ×1
管理番号	K0181764(0)DJ1 TF		

累積光束曲線

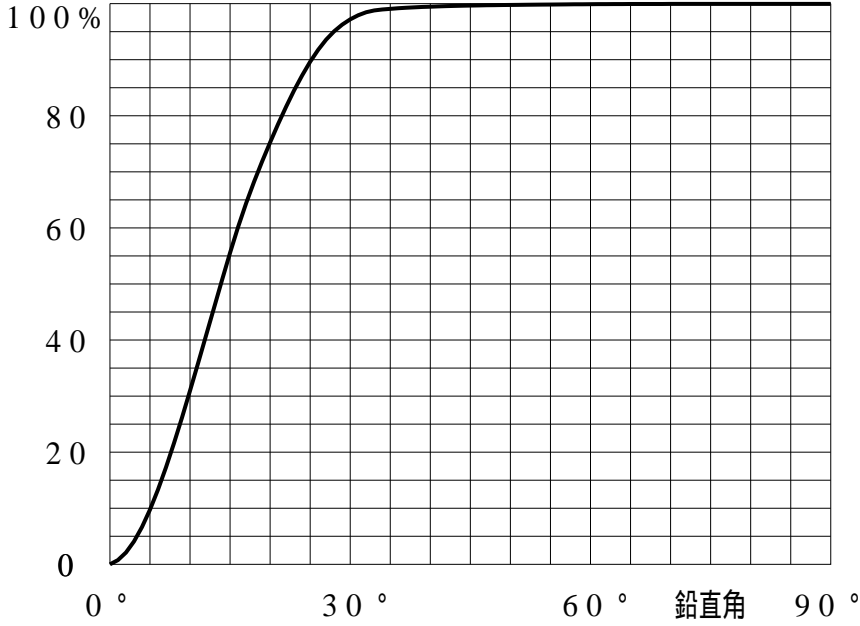

等光度曲線

(座標系)
cd/1000 lm

