


屋内照明器具特性	
品番 (品名)	LGB81010
光源	LLD2000LCB1 ×1 531.0 1 m
管理番号	K0175369 (1) D 1
BZ分類	BZ10

器具効率	89 %	反射率	天井	80 %				70 %				50 %				30 %				0 %	
	上方光束		89 %	壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0 %
	下方光束		0 %	床	10 %				10 %				10 %				10 %				0 %
		室指数	照明率 (X0.01)																ZCM		
保守率	良	0.67	0.6	38	29	23	19	33	25	20	17	22	17	14	12	13	10	8	7	0	
	中	0.63	0.8	45	36	30	26	39	31	26	23	26	22	18	16	15	12	11	9	0	
	否	0.56	1.0	50	42	36	32	43	36	31	27	29	25	22	19	17	14	13	11	0	
			1.25	55	47	42	37	47	41	36	32	32	28	25	23	18	16	15	13	0	
下方投影面積	c m ²		1.5	58	51	46	42	50	44	40	36	34	30	28	25	19	18	16	15	0	
	等価発光面積		c m ²	2.0	62	57	52	48	54	49	45	42	37	34	31	29	21	20	18	17	0
取付高さ	器具間隔最大限		2.5	65	60	56	53	56	52	49	46	38	36	34	32	22	21	20	19	0	
	横方向 (A)	縦方向 (B)	3.0	67	63	59	56	58	54	51	48	40	38	36	34	23	22	21	20	0	
H m	0.20 H m	0.20 H m	4.0	70	66	63	60	60	57	55	52	41	40	38	37	24	23	22	22	0	
			5.0	71	68	66	63	61	59	57	55	42	41	40	38	25	24	23	23	0	
			7.0	73	71	69	67	63	61	59	58	44	42	42	41	25	25	24	24	0	
			10.0	74	73	71	70	64	63	62	60	44	44	43	42	26	25	25	25	0	

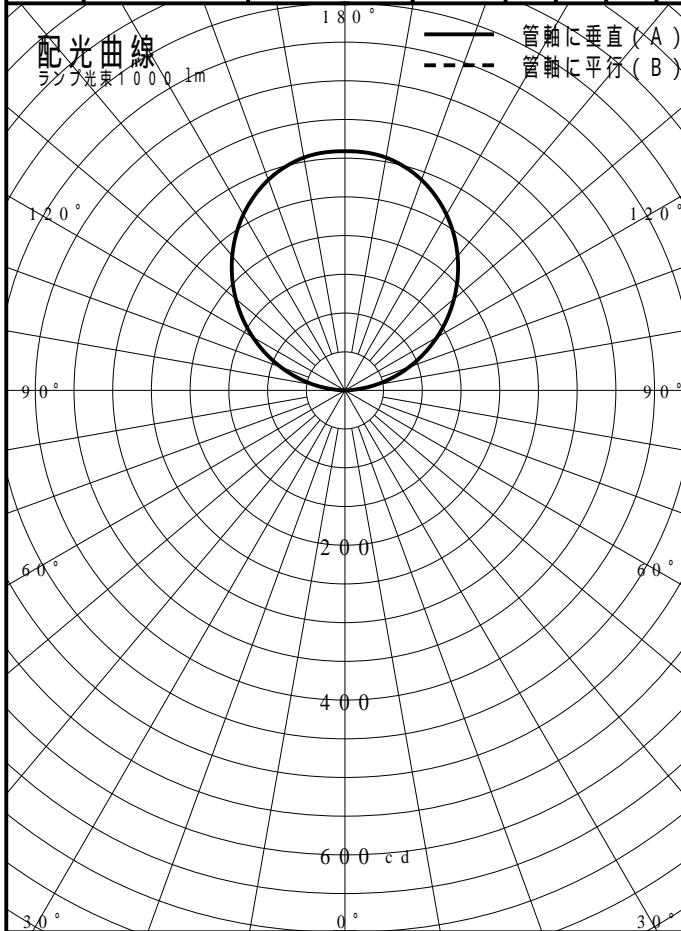

直射水平面照度	80 lx																			
	60																			
	40																			
	20																			
	10																			
	8																			
	6																			
	4																			
	2																			
	.8																			
	.6																			
	.4																			
	.2																			
		8 m	6	4	2	0	2	4	6	8										