


屋内照明器具特性	
品番 (品名)	LGB81010
光源	LLD4000LCB1 ×1 845.0 1 m
管理番号	K0175370(1)D 1
BZ分類	BZ10

器具効率	86 %	天井	80 %				70 %				50 %				30 %				0 %	
		壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0 %	
上方光束	86 %	床	10 %				10 %				10 %				10 %				0 %	
下方光束	0 %	室指数	照明率 (X0.01)																ZCM	
保守率	良 中 否 0.67 0.63 0.56	0.6	37	28	23	19	32	24	20	16	21	17	14	11	12	10	8	7	0	
		0.8	44	35	29	25	37	30	25	22	25	21	18	15	14	12	10	9	0	
		1.0	49	41	35	30	41	35	30	27	28	24	21	19	16	14	12	11	0	
		1.25	53	46	40	36	45	39	35	31	31	27	24	22	18	16	14	13	0	
下方投影面積	c m ²	1.5	56	49	44	40	48	43	38	35	33	29	27	25	19	17	16	14	0	
		2.0	60	55	50	46	52	47	43	40	35	33	30	28	20	19	18	17	0	
取付高さ	器具間隔最大限		2.5	63	58	54	51	54	50	47	44	37	35	33	31	21	20	19	18	0
	横方向 (A)	縦方向 (B)	3.0	65	61	57	54	56	52	49	47	38	36	34	33	22	21	20	19	0
H m	0.20 H m	0.20 H m	4.0	67	64	61	58	58	55	53	51	40	38	37	35	23	22	21	21	0
			5.0	69	66	63	61	59	57	55	53	41	40	38	37	24	23	22	22	0
			7.0	70	68	66	65	61	59	57	56	42	41	40	39	24	24	23	23	0
			10.0	72	70	69	67	62	61	59	58	43	42	41	41	25	25	24	24	0

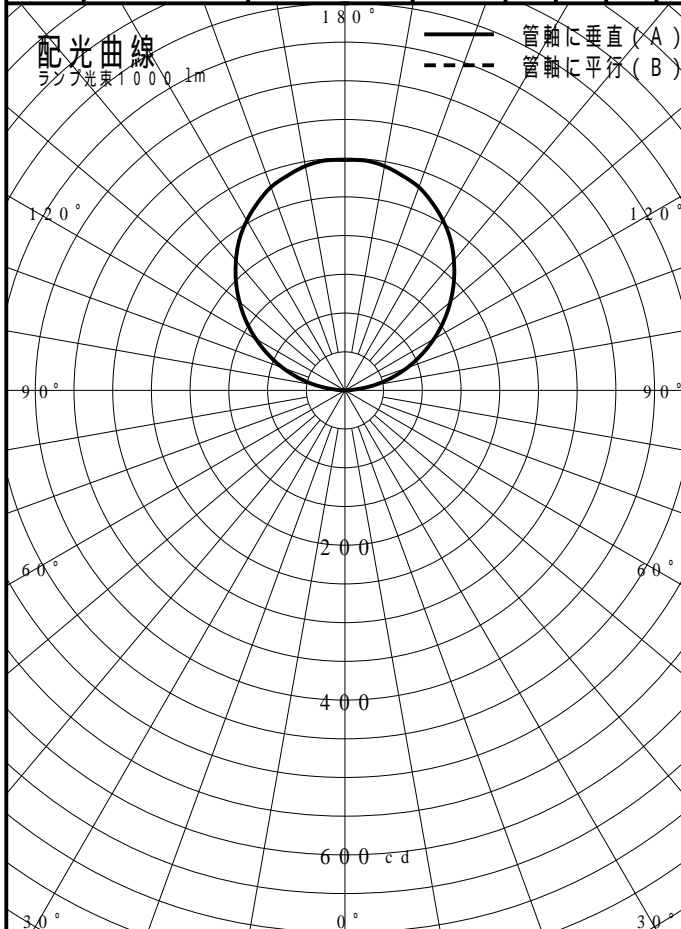

直射水平面照度	ラング光束1000 1m	80 lx																		
		60																		
		40																		
		20																		
		10																		
		8																		
		6																		
		4																		
		2																		
		.8																		
		.6																		
		.4																		
		.2																		
			8 m	6	4	2	0	2	4	6	8									