


| 屋内照明器具特性 | |
|----------|------------------------------|
| 品番 (品名) | YYY46025M+YYY96222Z_WI DE |
| 光源 | LED3000_70_2845 x1 2845.0 1m |
| 管理番号 | K0181311(0)DR1 |
| BZ分類 | BZ10 |

| | | | | | | | | | | | | | | | | | | | | | | | |
|--------|---------|---------|---------------|------|----|-----|-----|----|----|-----|-----|----|----|-----|-----|----|----|-----|----|----|----|----|-----|
| 器具効率 | 100% | 天井 | 80% | | | | 70% | | | | 50% | | | | 30% | | | | 0% | | | | |
| | 上方光束 | | 100% | 反射率 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 0% | | |
| | 下方光束 | | 0% | | 床 | 10% | | | | 10% | | | | 10% | | | | 10% | | | | 0% | |
| | | 室指数 | 照明率 (X0.01) | | | | | | | | | | | | | | | | | | | | ZCM |
| 保守率 | 良 | 0.69 | 0.6 | 43 | 33 | 26 | 22 | 37 | 28 | 23 | 19 | 25 | 19 | 16 | 13 | 14 | 11 | 9 | 8 | 0 | | | |
| | 中 | 0.67 | 0.8 | 51 | 41 | 34 | 29 | 43 | 35 | 30 | 25 | 29 | 24 | 21 | 18 | 17 | 14 | 12 | 11 | 0 | | | |
| | 否 | 0.63 | 1.0 | 56 | 47 | 40 | 35 | 48 | 41 | 35 | 31 | 33 | 28 | 24 | 22 | 19 | 16 | 14 | 13 | 0 | | | |
| | | | | 1.25 | 61 | 53 | 47 | 42 | 52 | 46 | 40 | 36 | 36 | 31 | 28 | 26 | 20 | 18 | 16 | 15 | 0 | | |
| 下方投影面積 | | | 1.5 | 65 | 57 | 51 | 47 | 56 | 49 | 44 | 40 | 38 | 34 | 31 | 28 | 22 | 20 | 18 | 17 | 0 | | | |
| | | | 2.0 | 70 | 63 | 58 | 54 | 60 | 55 | 50 | 47 | 41 | 38 | 35 | 33 | 24 | 22 | 21 | 19 | 0 | | | |
| 取付高さ | 器具間隔最大限 | | 2.5 | 73 | 67 | 63 | 59 | 63 | 58 | 54 | 51 | 43 | 40 | 38 | 36 | 25 | 23 | 22 | 21 | 0 | | | |
| | 横方向 (A) | 縦方向 (B) | 3.0 | 75 | 70 | 66 | 62 | 65 | 61 | 57 | 54 | 44 | 42 | 40 | 38 | 26 | 24 | 23 | 22 | 0 | | | |
| Hm | 0.20Hm | 0.20Hm | 4.0 | 78 | 74 | 71 | 68 | 67 | 64 | 61 | 59 | 46 | 44 | 43 | 41 | 27 | 26 | 25 | 24 | 0 | | | |
| | | | 5.0 | 80 | 76 | 73 | 71 | 68 | 66 | 64 | 61 | 47 | 46 | 44 | 43 | 27 | 27 | 26 | 25 | 0 | | | |
| | | | 7.0 | 81 | 79 | 77 | 75 | 70 | 68 | 67 | 65 | 49 | 48 | 46 | 45 | 28 | 28 | 27 | 27 | 0 | | | |
| | | | 10.0 | 83 | 81 | 80 | 78 | 72 | 70 | 69 | 68 | 50 | 49 | 48 | 47 | 29 | 29 | 28 | 28 | 0 | | | |

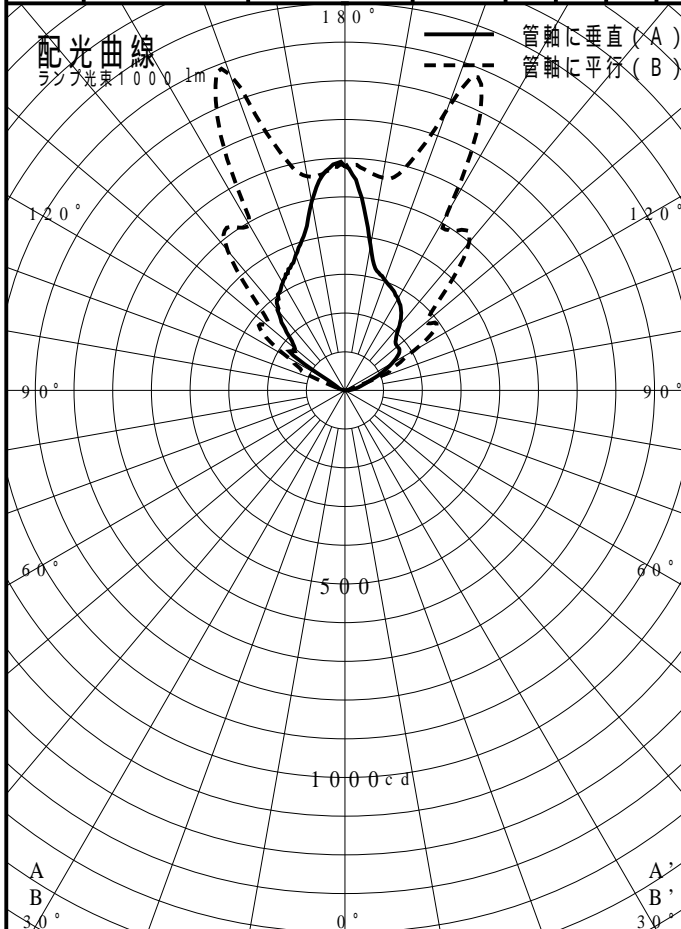

| | | | | | | | | | | | | | | | | | | | | |
|---------|-------|---|----|---|---|---|---|---|---|---|---|--|--|--|--|--|--|--|--|--|
| 直射水平面照度 | 80 lx | | | | | | | | | | | | | | | | | | | |
| | 60 | | | | | | | | | | | | | | | | | | | |
| | 40 | | | | | | | | | | | | | | | | | | | |
| | 20 | | | | | | | | | | | | | | | | | | | |
| | 10 | | | | | | | | | | | | | | | | | | | |
| | 8 | | | | | | | | | | | | | | | | | | | |
| | 6 | | | | | | | | | | | | | | | | | | | |
| | 4 | | | | | | | | | | | | | | | | | | | |
| | 2 | | | | | | | | | | | | | | | | | | | |
| | .8 | | | | | | | | | | | | | | | | | | | |
| | .6 | | | | | | | | | | | | | | | | | | | |
| | .4 | | | | | | | | | | | | | | | | | | | |
| | .2 | | | | | | | | | | | | | | | | | | | |
| | | A | | | | | | | | | | | | | | | | | | |
| | | B | | | | | | | | | | | | | | | | | | |
| | | | 8m | 6 | 4 | 2 | 0 | 2 | 4 | 6 | 8 | | | | | | | | | |