



投光照明器具特性		
品名(品番)	NYY6 2 1 0 4 + NTS 9 0 1 0 1 K + NYY9 0	
光源	LED2700_70_50 x1	



配光の区分・種類	非対称配光	主ビ - ム効率	%			
器具点灯角度		ビ - ム範囲	I ₀ / 2	I ₀ / 10	I ₀ / 20	
器具効率	100.1 %	ビ - ム効率	43. 0%	83. 6%	89. 9%	
最大光度	7297 cd/1000 lm	ビ - ム角 AA' 9.5 BB' 37.9	18.0 66.5	22.6 74.7		

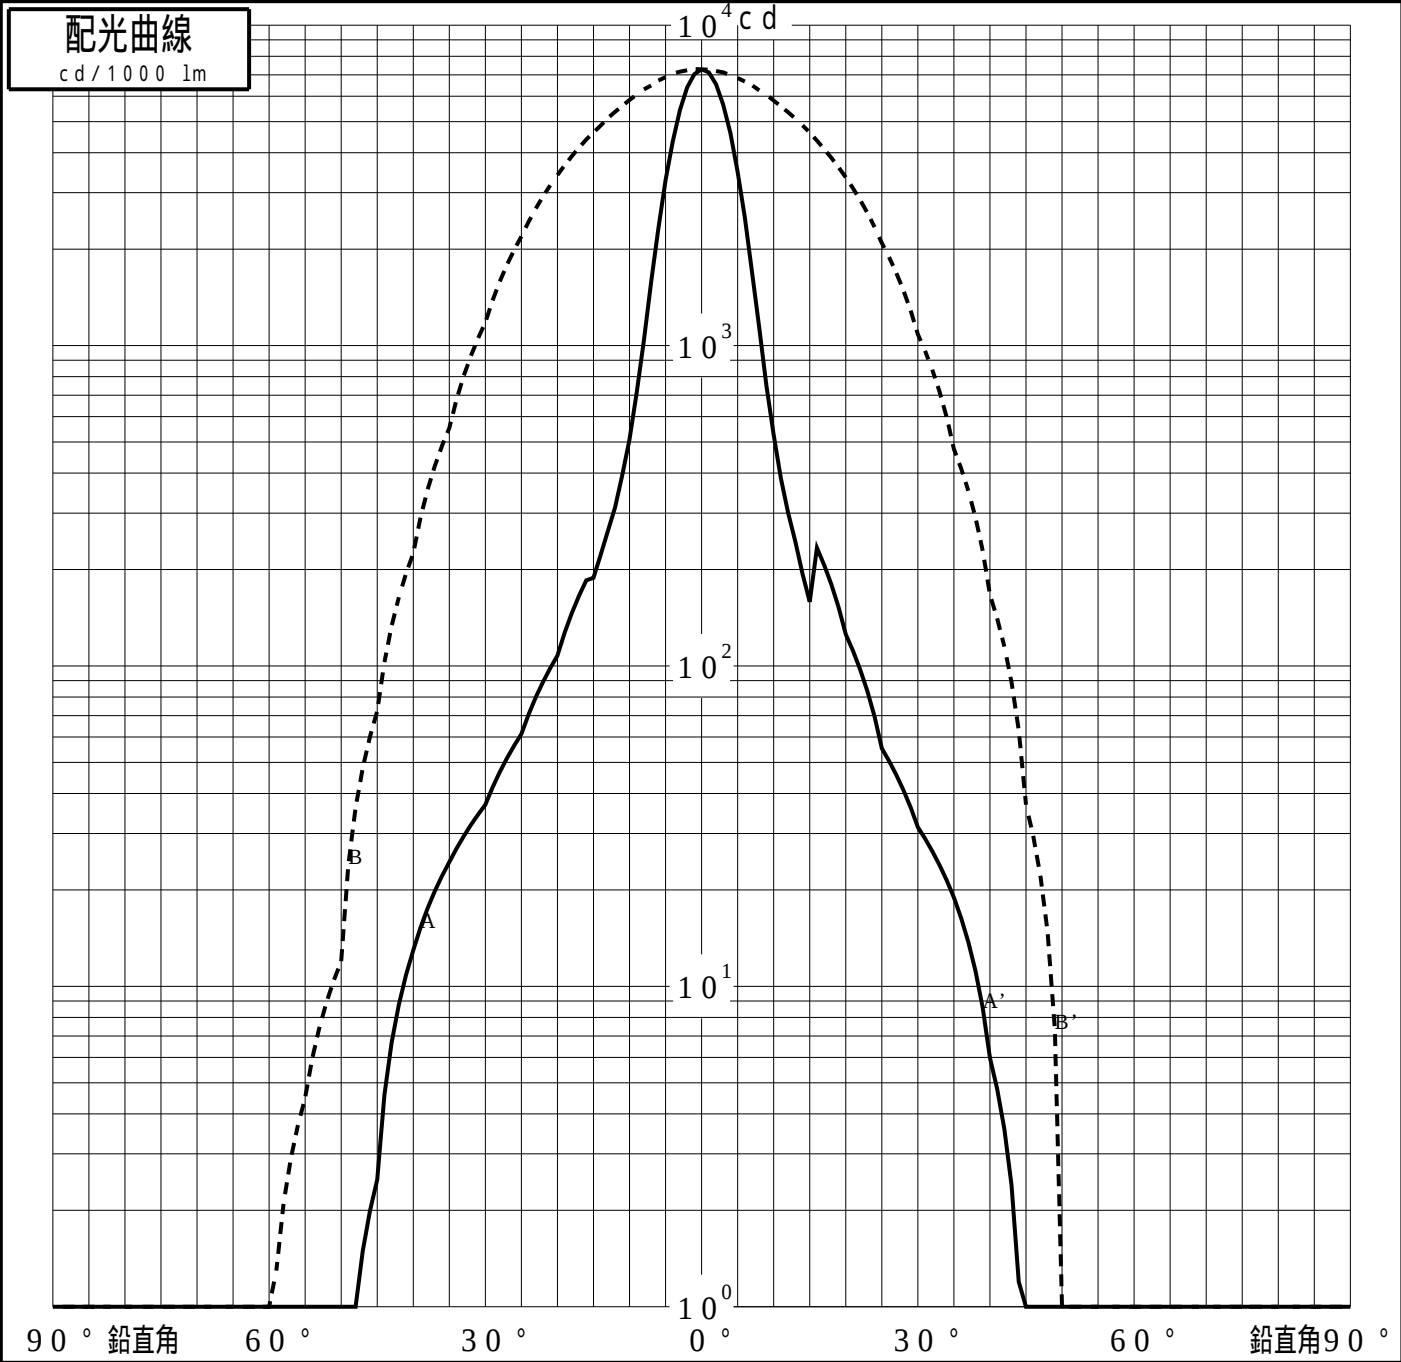

投光照明器具特性

品番 (品名)	NY Y62104+NTS90101K+NY Y90	光源	LED2700_70_50 x1
管理番号	K0195339(0)DJ1 XY		

累積光束曲線

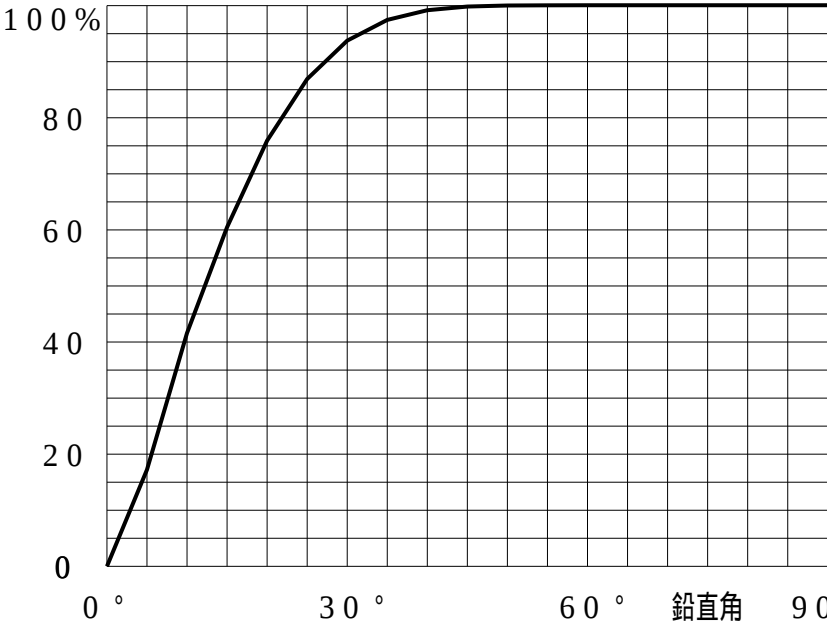

等光度曲線

(αβ座標系)
cd/1000 lm

