


屋内照明器具特性	
品番 (品名)	YYY46024M+YYY96222Z_WI DE
光源	LED4000_70_2965 x1 2965.0 lm
管理番号	K0181311(0)DR1
BZ分類	BZ10

器具効率	100%	反射率	天井	80%				70%				50%				30%				0%			
	上方光束		100%	壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0%		
	下方光束		0%	床	10%				10%				10%				10%				0%		
		室指数	照明率 (X0.01)																				ZCM
保守率	良	0.69	0.6	43	33	26	22	37	28	23	19	25	19	16	13	14	11	9	8	0			
	中	0.67	0.8	51	41	34	29	43	35	30	25	29	24	21	18	17	14	12	11	0			
	否	0.63	1.0	56	47	40	35	48	41	35	31	33	28	24	22	19	16	14	13	0			
			1.25	61	53	47	42	52	46	40	36	36	31	28	26	20	18	16	15	0			
下方投影面積	cm ²		1.5	65	57	51	47	56	49	44	40	38	34	31	28	22	20	18	17	0			
等価発光面積	cm ²		2.0	70	63	58	54	60	55	50	47	41	38	35	33	24	22	21	19	0			
取付高さ	器具間隔最大限		2.5	73	67	63	59	63	58	54	51	43	40	38	36	25	23	22	21	0			
	横方向 (A)	縦方向 (B)	3.0	75	70	66	62	65	61	57	54	44	42	40	38	26	24	23	22	0			
Hm	0.20Hm	0.20Hm	4.0	78	74	71	68	67	64	61	59	46	44	43	41	27	26	25	24	0			
			5.0	80	76	73	71	68	66	64	61	47	46	44	43	27	27	26	25	0			
			7.0	81	79	77	75	70	68	67	65	49	48	46	45	28	28	27	27	0			
			10.0	83	81	80	78	72	70	69	68	50	49	48	47	29	29	28	28	0			

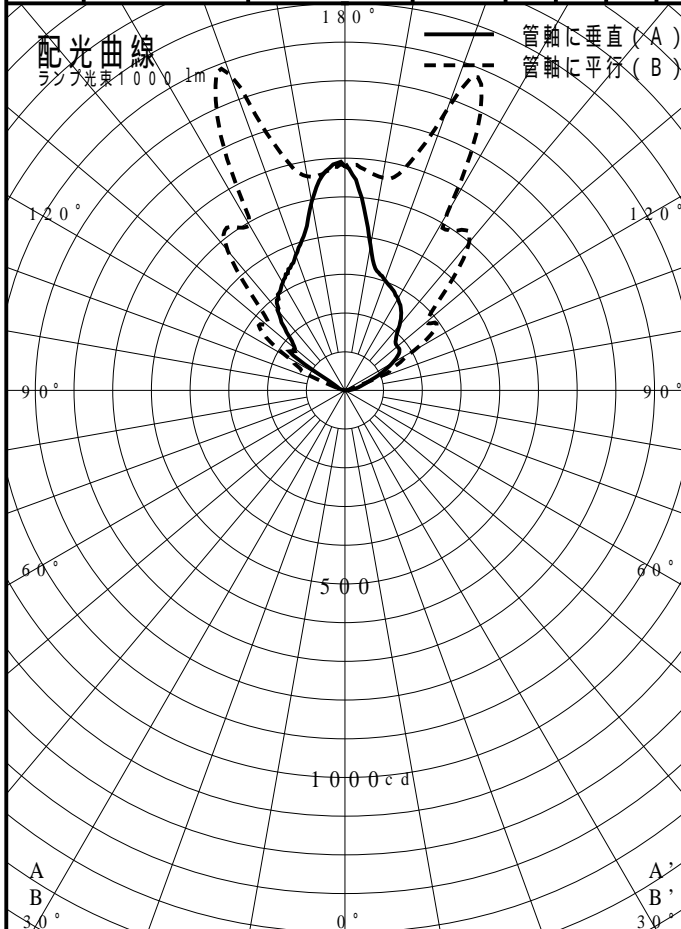

直射水平面照度	80 lx																			
	60																			
	40																			
	20																			
	10																			
	8																			
	6																			
	4																			
	2																			
	.8																			
	.6																			
	.4																			
	.2																			
		A																		
		B																		
			8m	6	4	2	0	2	4	6	8									