
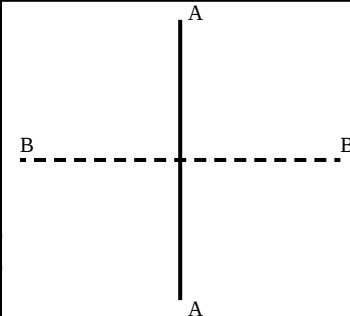


投光照明器具特性		
品名(品番)	NYT1033FK+NYK50003	
光源	LED3000_70_1580 ×1 1580.0 lm	
管理番号	K0168550(0)DR1 TF	



配光の区分・種類	二面对称配光	主ビ - ム効率	%			
器具点灯角度		ビ - ム範囲	I ₀ / 2	I ₀ / 10	I ₀ / 20	
器具効率	100.1 %	ビ - ム効率	53.9%	90.6%	95.9%	
最大光度	1290 cd/1000 lm	ビ - ム角	AA 68.1 BB 35.3	107.9 64.1	122.8 75.1	

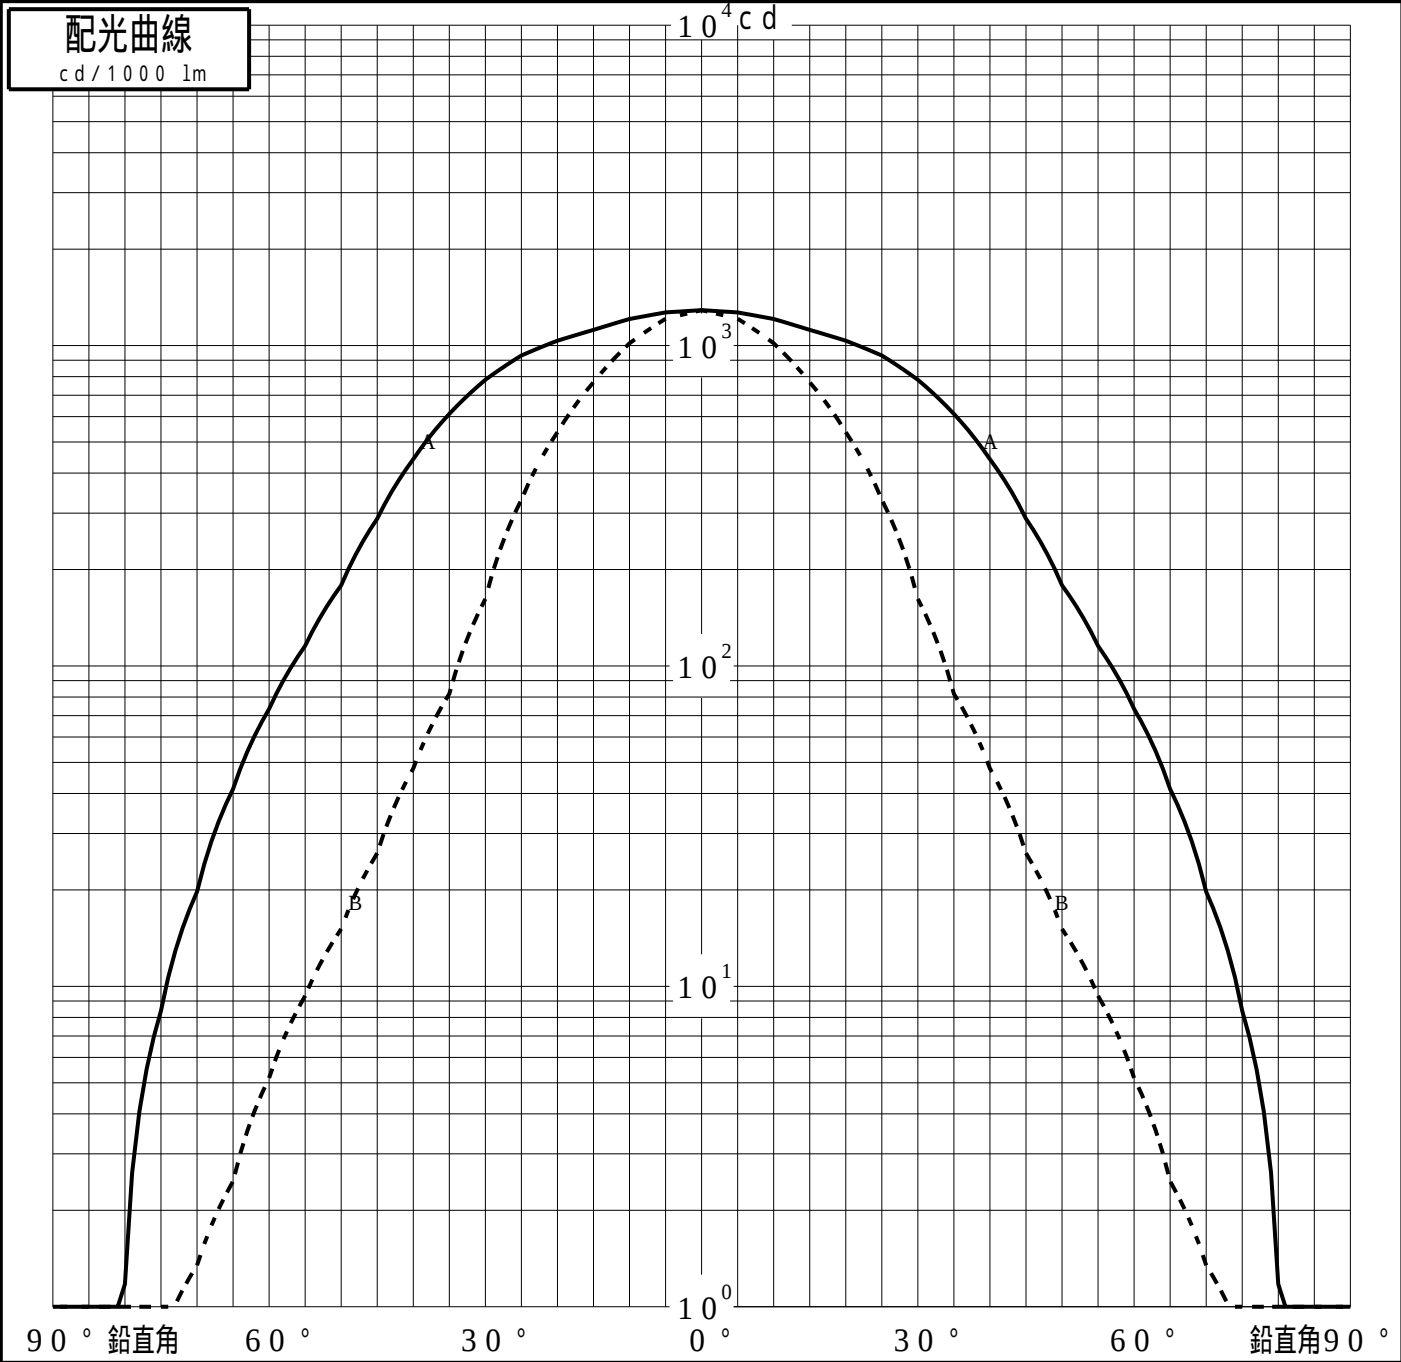

投光照明器具特性

品番 (品名)	NYT1033FK+NYK50003	光源	LED3000_70_1580 ×1
管理番号	K0168550(0)DR1 TF		

累積光束曲線

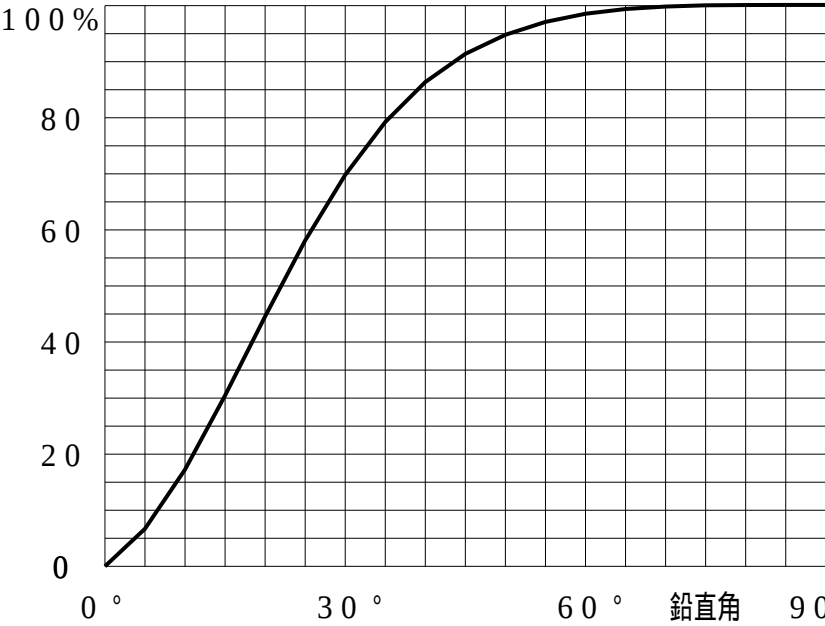

等光度曲線

(αβ座標系)
cd/1000 lm

