
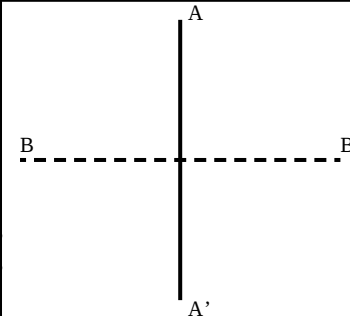


投光照明器具特性					
品名（品番）	NYY65930+NYY91300B+NTS90				
光源	LED5000_70_1980 ×1 1980.0 lm				
管理番号	K0165058(0)DJ1 XY				



配光の区分・種類	非対称配光	主ビ - ム効率	%			
器具点灯角度		ビ - ム範囲	I ₀ / 2	I ₀ / 10	I ₀ / 20	
器具効率	100.0 %	ビ - ム効率	62.9%	93.7%	97.9%	
最大光度	1625 cd/1000 lm	ビ - ム角 AA' 36.6° BB' 57.7°	60.9° 88.5°	69.3° 96.3°		

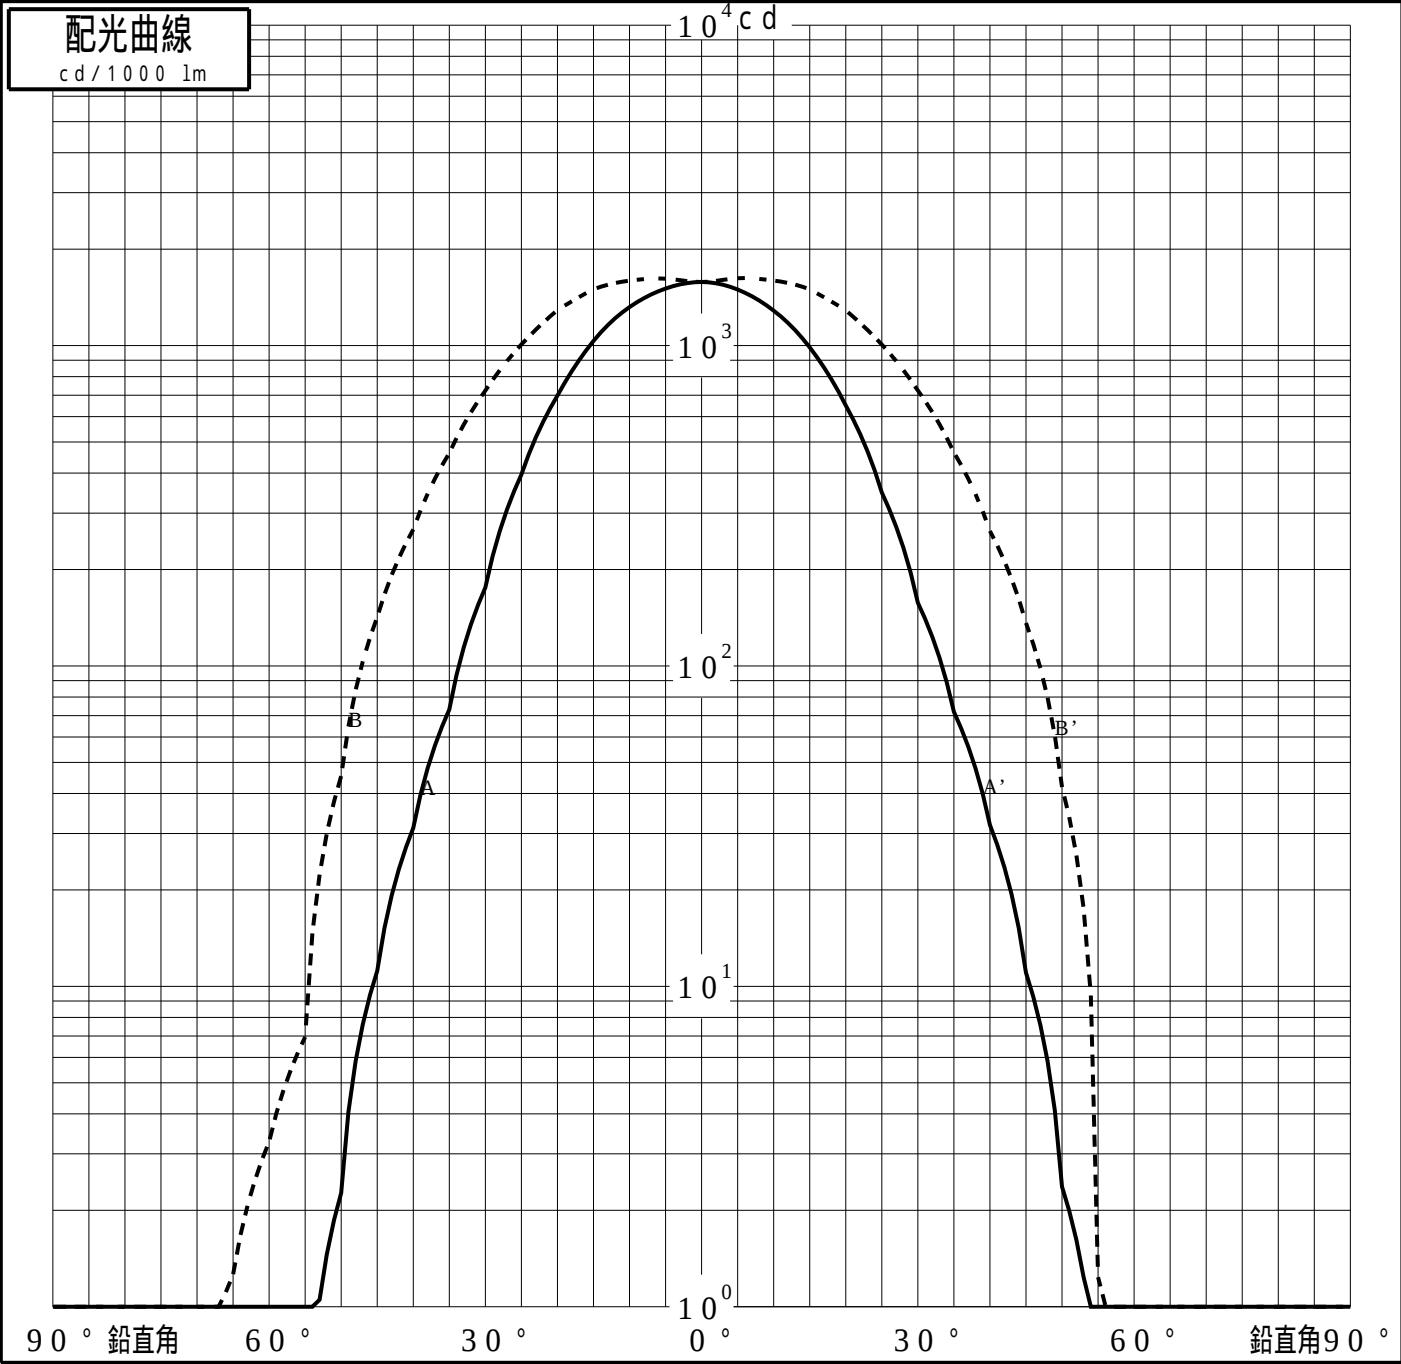

投光照明器具特性

品番 (品名)	NY Y65930+NY Y91300B+NTS90	光源	LED5000_70_1980 ×1
管理番号	K0165058(0)DJ1 XY		

累積光束曲線

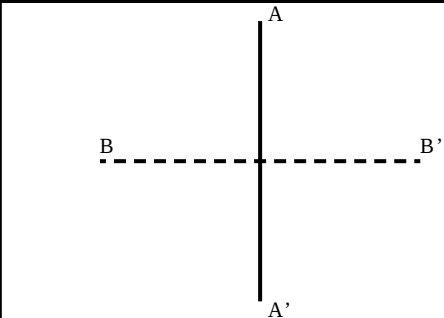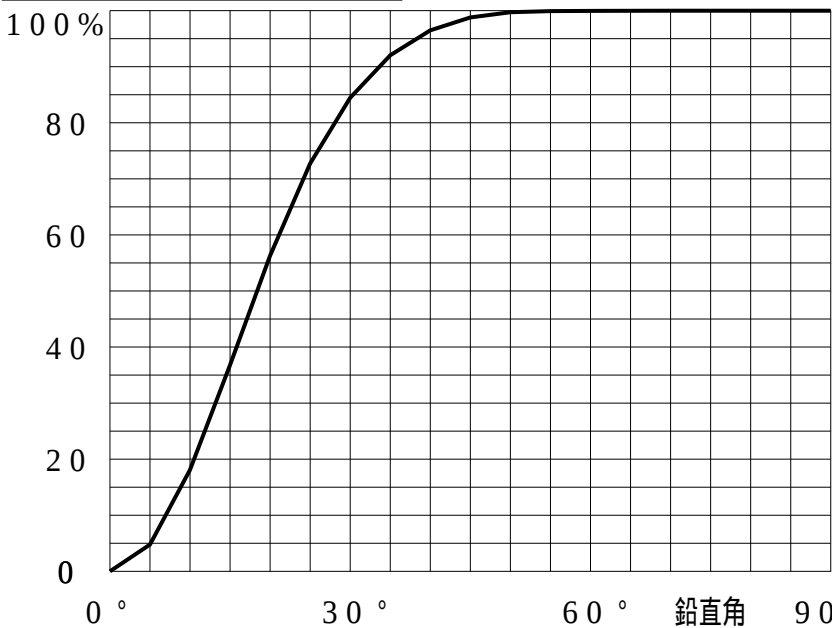

等光度曲線
(αβ座標系)
cd/1000 lm

