



投光照明器具特性		
品名（品番）	NYY65943+NYY96300S+NTS90	
光源	LED3000_70_1400 ×1 1400.0 lm	
管理番号	K0164948(2)DJ1 XY	



配光の区分・種類	非対称配光	主ビ - ム効率	%			
器具点灯角度		ビ - ム範囲	I ₀ / 2	I ₀ / 10	I ₀ / 20	
器具効率	100.0 %	ビ - ム効率	56.7%	94.0%	98.0%	
最大光度	1771 cd/1000 lm	ビ - ム角 AA' 42.6 BB' 42.7	74.5 76.1	83.1 84.6		

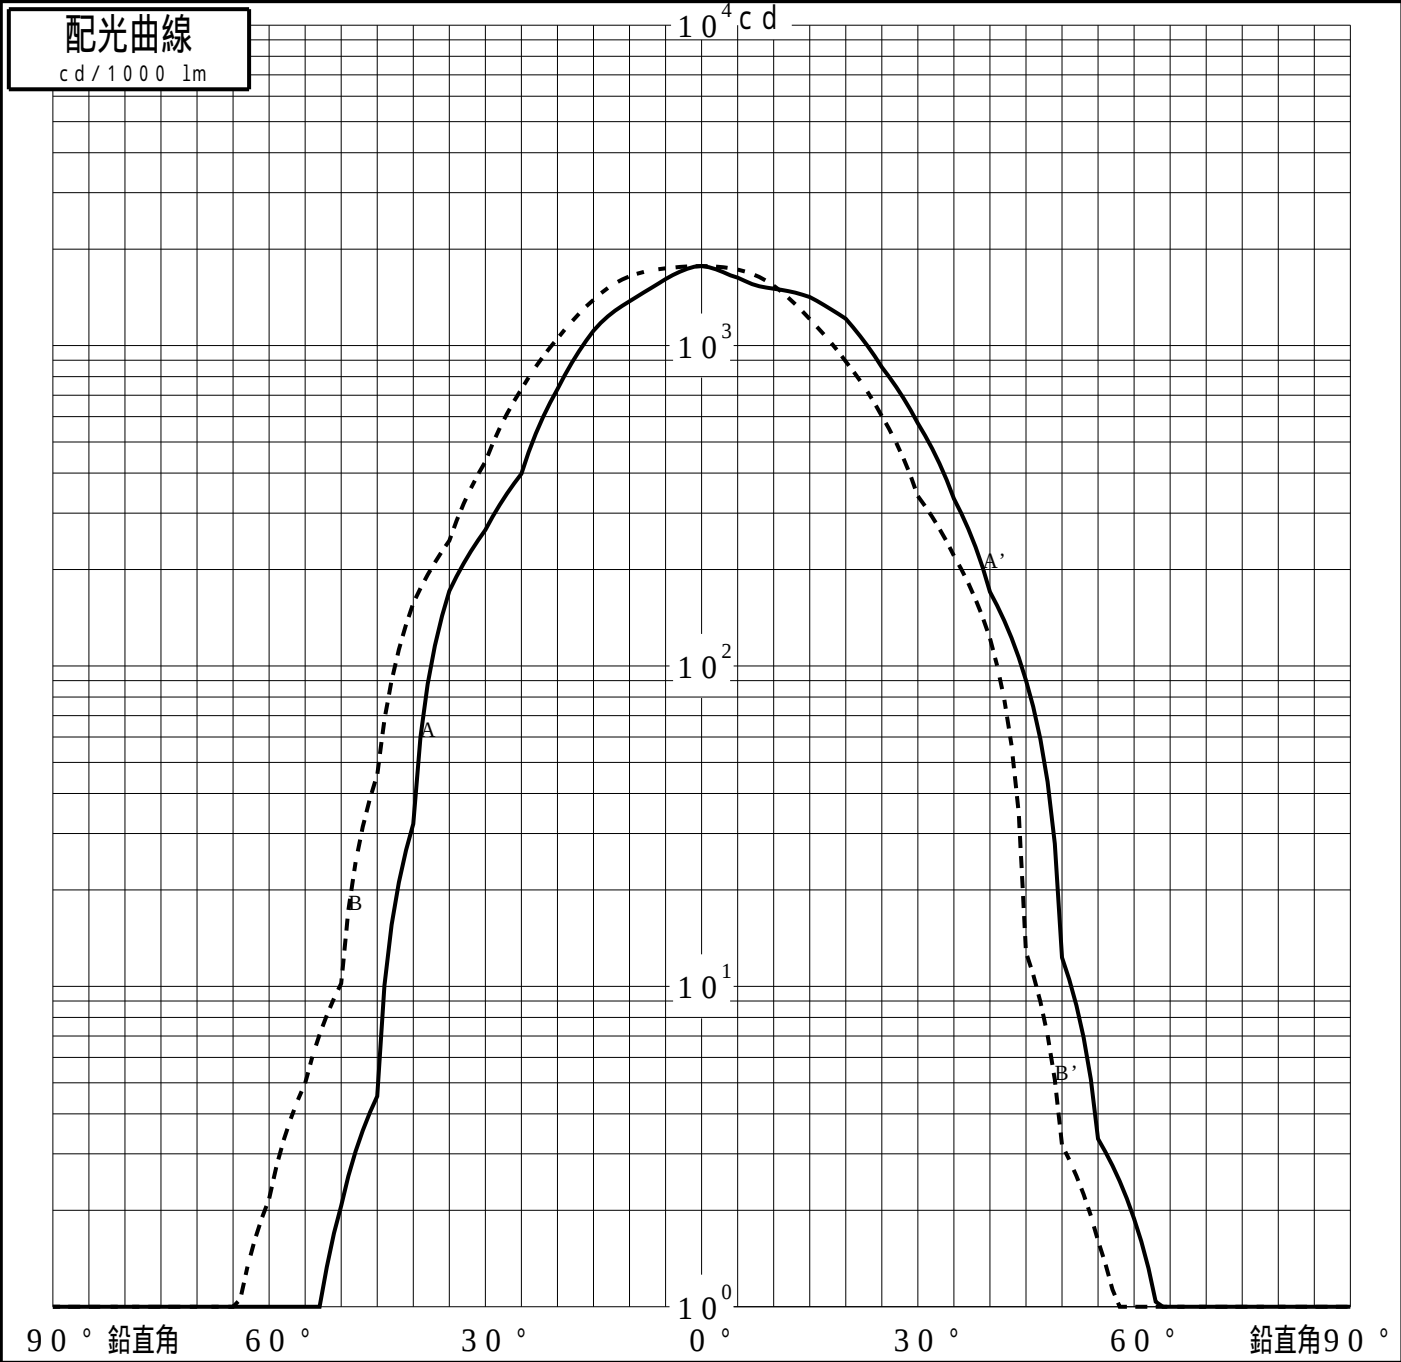

投光照明器具特性

品番 (品名)	NY Y65943+NY Y96300S+NTS90	光源	LED3000_70_1400 ×1
管理番号	K0164948(2)DJ1 XY		

累積光束曲線

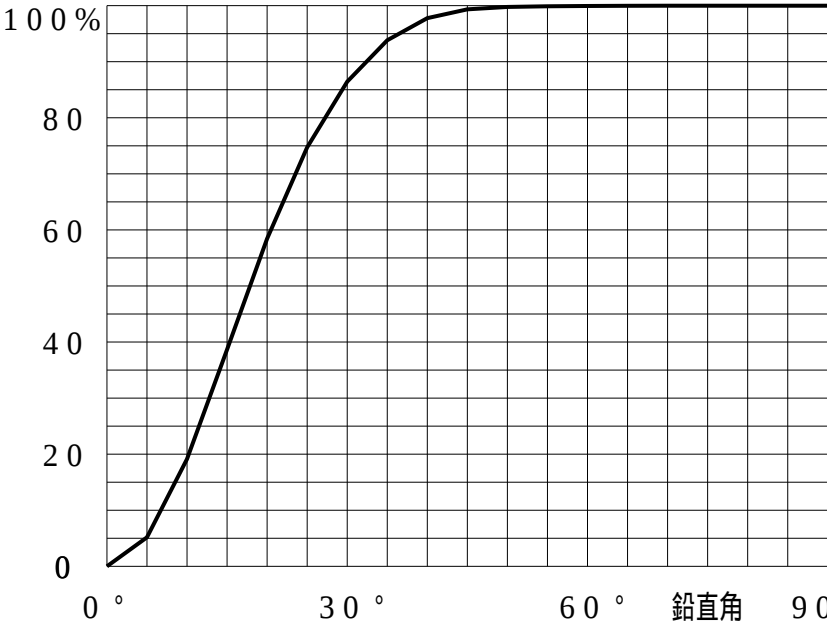

等光度曲線

(αβ座標系)
cd/1000 lm

