

屋内照明器具特性

品番 (品名) S L B 1 6 7 8 1 + S L K 2 2 0 1 4 + S L K 2 9 0

光源 L L D 3 4 1 1 L C B 1 × 1 7 0 0 . 0 l m


管理番号 K 0 1 9 2 4 8 2 (1) D R 1

B Z 分類 B Z 1

器具効率			7 5 %	反 射 率	天井	8 0 %				7 0 %				5 0 %				3 0 %				0 %		
上方光束			0 %		壁	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	0 %		
下方光束			7 5 %		床	1 0 %				1 0 %				1 0 %				1 0 %				0 %		
				室指数	照 明 率 (X 0 . 0 1)																			Z C M
保守率				良 中 否	0 . 6	6 2	5 8	5 5	5 3	6 2	5 8	5 5	5 3	6 1	5 7	5 5	5 3	6 0	5 7	5 4	5 3	5 2		
					0 . 6 3	0 . 8	6 7	6 3	6 1	5 9	6 7	6 3	6 0	5 9	6 6	6 2	6 0	5 8	6 5	6 2	6 0	5 8	5 7	
					0 . 5 6	1 . 0	7 0	6 7	6 4	6 2	6 9	6 6	6 4	6 2	6 8	6 5	6 3	6 2	6 7	6 5	6 3	6 2	6 1	
下方投影面積			c m ²	1 . 2 5	7 2	6 9	6 7	6 5	7 2	6 9	6 7	6 5	7 0	6 8	6 6	6 5	6 9	6 7	6 6	6 4	6 3			
等価発光面積				c m ²	1 . 5	7 4	7 1	6 9	6 7	7 3	7 1	6 9	6 7	7 2	7 0	6 8	6 7	7 1	6 9	6 7	6 6	6 5		
					2 . 0	7 6	7 4	7 2	7 0	7 5	7 3	7 1	7 0	7 4	7 2	7 0	6 9	7 2	7 1	7 0	6 9	6 7		
取付		器具間隔最大限		2 . 5	7 7	7 5	7 3	7 2	7 6	7 4	7 3	7 2	7 5	7 3	7 2	7 1	7 3	7 2	7 1	7 0	6 9			
高さ	横方向 (A)		縦方向 (B)	3 . 0	7 7	7 6	7 5	7 3	7 7	7 5	7 4	7 3	7 5	7 4	7 3	7 2	7 4	7 3	7 2	7 1	7 0			
H m	0 . 7 1 H m		0 . 7 1 H m	4 . 0	7 8	7 7	7 6	7 5	7 8	7 6	7 5	7 5	7 6	7 5	7 4	7 4	7 5	7 4	7 3	7 3	7 1			
				5 . 0	7 9	7 8	7 7	7 6	7 8	7 7	7 6	7 6	7 6	7 6	7 5	7 5	7 5	7 4	7 4	7 3	7 2			
				7 . 0	7 9	7 9	7 8	7 7	7 9	7 8	7 7	7 7	7 7	7 7	7 6	7 6	7 6	7 5	7 5	7 4	7 2			
				1 0 . 0	8 0	7 9	7 9	7 8	7 9	7 9	7 8	7 8	7 7	7 7	7 7	7 6	7 6	7 6	7 5	7 5	7 3			

配光曲線

ランプ光束 1 0 0 0 l m

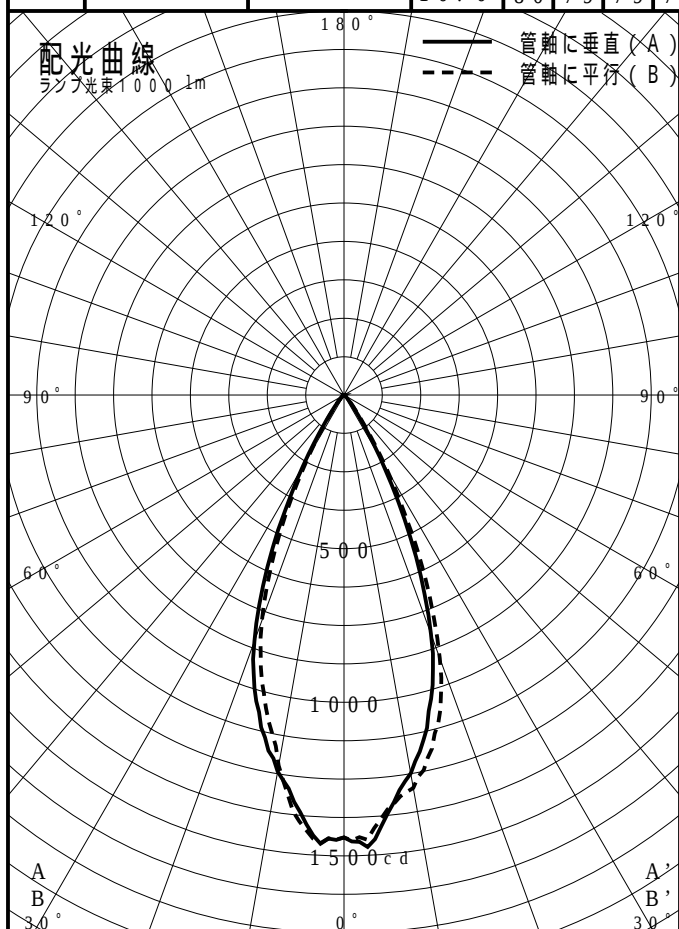

直射水平面照度

ランプ光束 1 0 0 0 l m

