

投光照明器具特性	
品名（品番）	P A K 8 4 0 1 1 C U V V W 3 0 + N T S 9 0 1 0 1
光源	L E D 3 0 0 0 _ 7 0 _ 5 3 0 × 1 5 3 0 . 0 l m
管理番号	K 0 1 7 9 8 0 6 (0) D R 1 T F

PAK84011CUVVW30+NTS90101

LED3000_70_530 x1 530.0 l m

K0179806(0) DR1 TF

軸対称配光 広角形

99.6 %

I 0 / 2 0

100.0 %


96.8%

1997
cd/1000 1m


42.5

66.8

72.4





cd/1000 lm
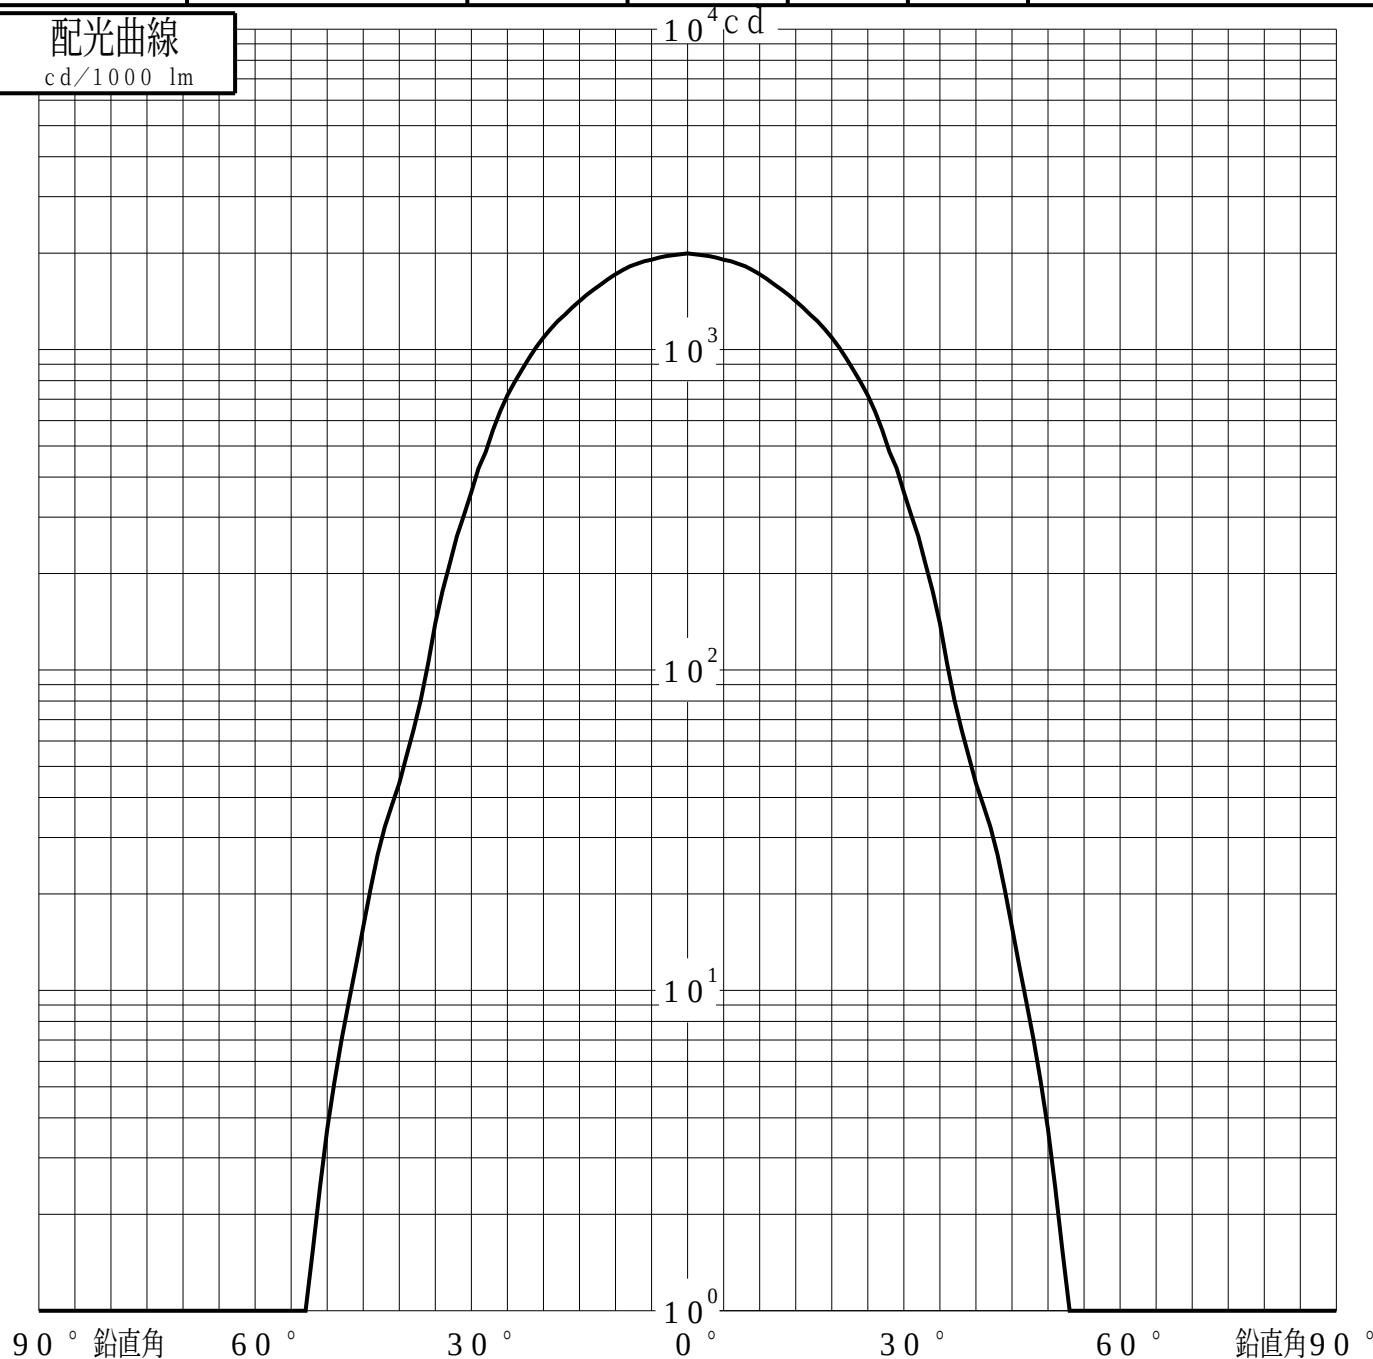
$$\overline{10^4 | c d}$$


投光照明器具特性

品番 (品名)	PAK84011CUVW30+NTS90101	光源	LED3000_70_530 ×1
管理番号	K0179806(0)DR1 TF		

累積光束曲線

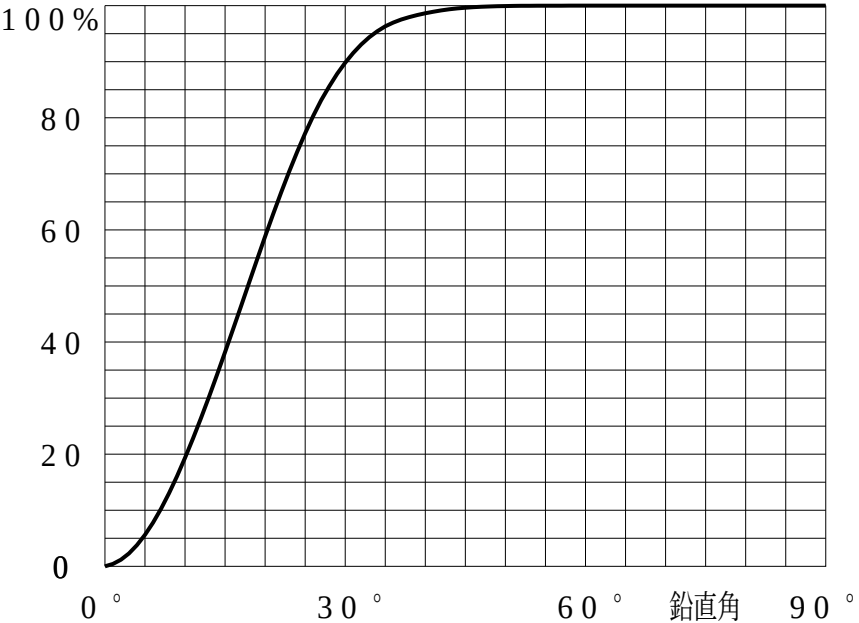

等光度曲線

(αβ座標系)
cd/1000 lm

