

屋内照明器具特性

品番 (品名) P A 1 2 5 4 5 W W W P 4 0 + N T S 9 0 2 5 0


光源 L E D 4 0 0 0 _ 7 0 _ 1 7 4 0 x 1 1 7 4 0 . 0 l m

管理番号 K 0 1 5 3 5 6 9 (4) D B 1

B Z 分類 B Z 1

器具効率		1 0 0 %	反射率	天井	8 0 %				7 0 %				5 0 %				3 0 %				0 %
				壁	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	0 %
上方光束		0 %	室指数	床	1 0 %				1 0 %				1 0 %				1 0 %				0 %
下方光束		1 0 0 %		照明率 (X 0 . 0 1) Z C M																	
保守率		良	0 . 6 3	0 . 6	7 6	6 8	6 3	6 0	7 5	6 8	6 3	6 0	7 4	6 7	6 3	6 0	7 2	6 6	6 2	5 9	5 8
		中	0 . 6	0 . 8	8 4	7 7	7 2	6 9	8 3	7 7	7 2	6 9	8 1	7 6	7 2	6 9	8 0	7 5	7 1	6 8	6 7
		否	0 . 5 6	1 . 0	8 9	8 3	7 8	7 5	8 8	8 2	7 8	7 5	8 6	8 1	7 7	7 4	8 4	8 0	7 7	7 4	7 3
下方投影面積		c m ²	1 . 2 5	9 3	8 8	8 3	8 0	9 2	8 7	8 3	8 0	9 0	8 6	8 2	8 0	8 8	8 4	8 1	7 9	7 7	
			1 . 5	9 6	9 1	8 7	8 4	9 4	9 0	8 7	8 4	9 2	8 9	8 6	8 3	9 0	8 7	8 5	8 3	8 1	
等価発光面積		c m ²	2 . 0	9 9	9 5	9 2	8 9	9 8	9 4	9 1	8 9	9 6	9 3	9 0	8 8	9 4	9 1	8 9	8 7	8 5	
			2 . 5	1 0 1	9 8	9 5	9 3	1 0 0	9 7	9 4	9 2	9 7	9 5	9 3	9 1	9 5	9 3	9 2	9 0	8 8	
取付高さ	器具間隔最大限		3 . 0	1 0 2	9 9	9 7	9 5	1 0 1	9 8	9 6	9 4	9 9	9 7	9 5	9 3	9 7	9 5	9 3	9 2	9 0	
	横方向 (A)	縦方向 (B)	4 . 0	1 0 4	1 0 2	1 0 0	9 8	1 0 3	1 0 1	9 9	9 7	1 0 0	9 9	9 7	9 6	9 8	9 7	9 6	9 5	9 2	
H m	0 . 4 9 H m	0 . 9 5 H m	5 . 0	1 0 5	1 0 3	1 0 1	1 0 0	1 0 4	1 0 2	1 0 0	9 9	1 0 1	1 0 0	9 9	9 8	9 9	9 8	9 7	9 6	9 4	
			7 . 0	1 0 6	1 0 4	1 0 3	1 0 2	1 0 5	1 0 3	1 0 2	1 0 1	1 0 2	1 0 1	1 0 0	1 0 0	1 0 0	9 9	9 9	9 8	9 5	
			1 0 . 0	1 0 7	1 0 6	1 0 5	1 0 4	1 0 5	1 0 4	1 0 3	1 0 3	1 0 2	1 0 2	1 0 1	1 0 1	1 0 0	1 0 0	9 9	9 7		

配光曲線
ランプ光束1000lm

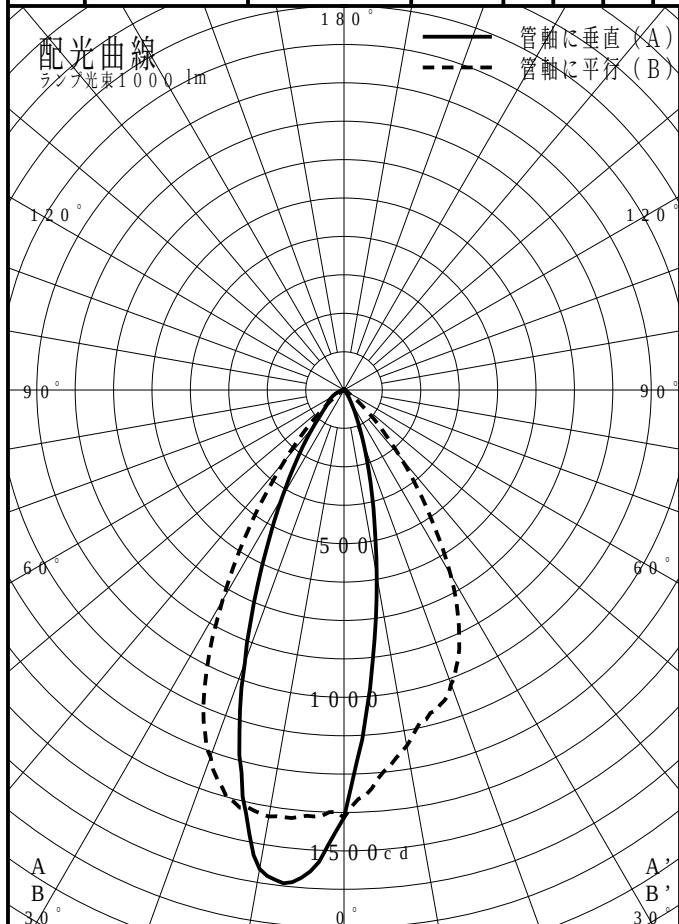

直射水平面照度
ランプ光束1000lm

