

屋内照明器具特性

品番 (品名) SLB15180 + SLK22010 + SLK290

光源 LLD2421LCB1 x1 500.0 lm


管理番号 K0193692 (0) DB1

BZ分類 BZ1/1.1/BZ2/3.5/BZ3

器具効率		93 %	反射率	天井	80 %				70 %				50 %				30 %				0 %			
				壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0 %			
上方光束		9 %		床	10 %				10 %				10 %				10 %				0 %			
下方光束		84 %		室指数	照明率 (X0.01)																			Z C M
保守率		良	0.63	0.6	66	58	53	50	65	58	53	50	63	56	52	49	60	55	51	49	47			
		中	0.6	0.8	73	65	60	57	71	65	60	56	68	63	59	56	66	61	58	55	53			
		否	0.56	1.0	77	70	65	62	75	69	65	61	72	67	63	60	69	65	62	59	57			
下方投影面積		c m ²		1.25	81	75	70	66	79	73	69	66	76	71	67	64	73	69	66	63	60			
				1.5	83	78	73	70	81	76	72	69	78	74	70	68	75	71	69	66	63			
等価発光面積		c m ²		2.0	87	82	78	75	85	80	77	74	81	78	75	72	78	75	72	70	67			
				2.5	89	85	81	78	87	83	80	77	83	80	77	75	80	77	75	73	70			
取付高さ	器具間隔最大限		3.0	90	87	83	81	88	85	82	80	84	82	79	77	81	79	77	75	71				
	横方向 (A)	縦方向 (B)		4.0	92	89	87	84	90	87	85	83	86	84	82	80	83	81	79	78	74			
H m	0.48 H m	0.51 H m	4.0	93	91	88	86	91	89	87	85	87	86	84	82	84	82	81	80	75				
			5.0	95	93	91	89	93	91	89	88	89	87	86	85	85	84	83	82	77				
			7.0	96	94	93	91	94	92	91	90	90	89	88	87	86	85	84	84	79				
			10.0	96	94	93	91	94	92	91	90	90	89	88	87	86	85	84	84	79				

配光曲線

ランプ光束1000lm

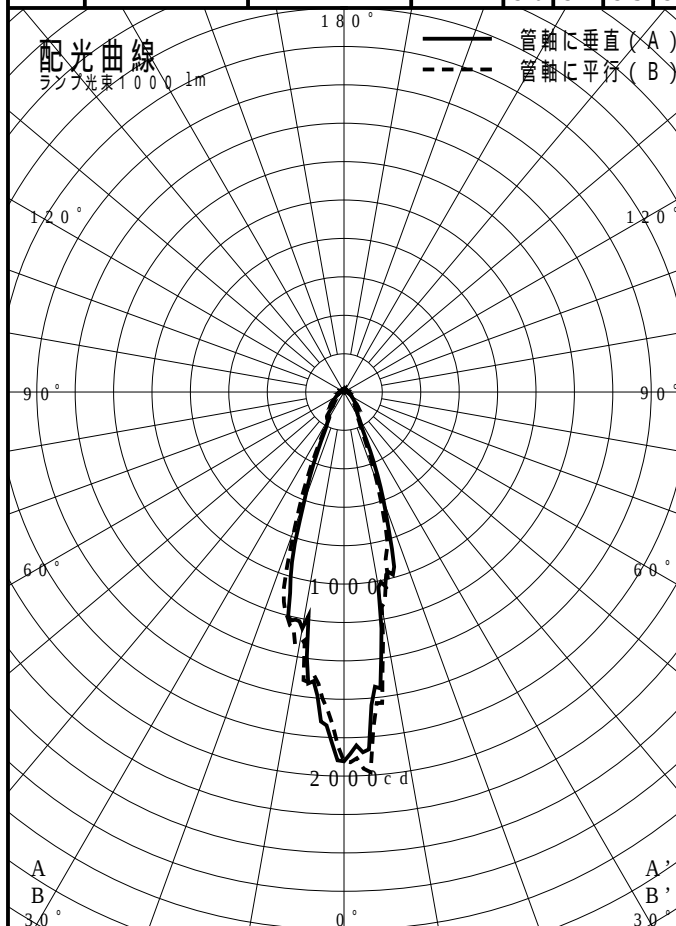

直射水平面照度

ランプ光束1000lm

