

屋内照明器具特性

品番 (品名) SLB15180 + SLK22014 + SLK290

光源 LLD3421LCB1 x1 700.0 lm


管理番号 K0193685 (0) DB1

BZ分類 BZ1/1.8 / BZ2/8.5 / BZ3

器具効率		97 %	反射率	天井壁床	80 %				70 %				50 %				30 %				0 %	
上方光束		11 %			70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0 %	
下方光束		86 %			10 %				10 %				10 %				10 %				0 %	
			室指数	照明率 (X0.01)																	Z C M	
保守率			良 中 否	0.63	0.6	70	62	57	54	69	61	57	53	66	60	56	53	64	58	55	52	50
				0.6	0.8	77	69	65	61	75	68	64	60	72	66	62	59	69	64	61	58	56
				0.56	1.0	81	74	70	66	79	73	69	65	76	71	67	64	73	68	65	63	60
下方投影面積		c m ²	1.25	85	79	74	71	83	77	73	70	79	75	71	68	76	72	69	67	63		
等価発光面積			1.5	87	82	77	74	85	80	76	73	81	77	74	71	78	74	72	69	66		
			2.0	91	86	82	79	89	84	81	78	84	81	78	76	81	78	75	73	70		
取付高さ	器具間隔最大限		2.5	93	89	85	82	91	87	84	81	86	83	81	79	82	80	78	76	72		
	横方向 (A)	縦方向 (B)	3.0	94	91	88	85	92	89	86	84	88	85	83	81	84	82	80	78	74		
H m	0.54 H m	0.54 H m	4.0	96	93	91	88	94	91	89	87	89	87	85	84	85	84	82	81	76		
			5.0	97	95	93	91	95	93	91	89	91	89	87	86	86	85	84	83	78		
			7.0	99	97	95	94	96	95	93	92	92	91	89	88	88	87	86	85	79		
			10.0	100	98	97	96	97	96	95	94	93	92	91	90	89	88	87	86	81		

配光曲線

ランプ光束1000lm

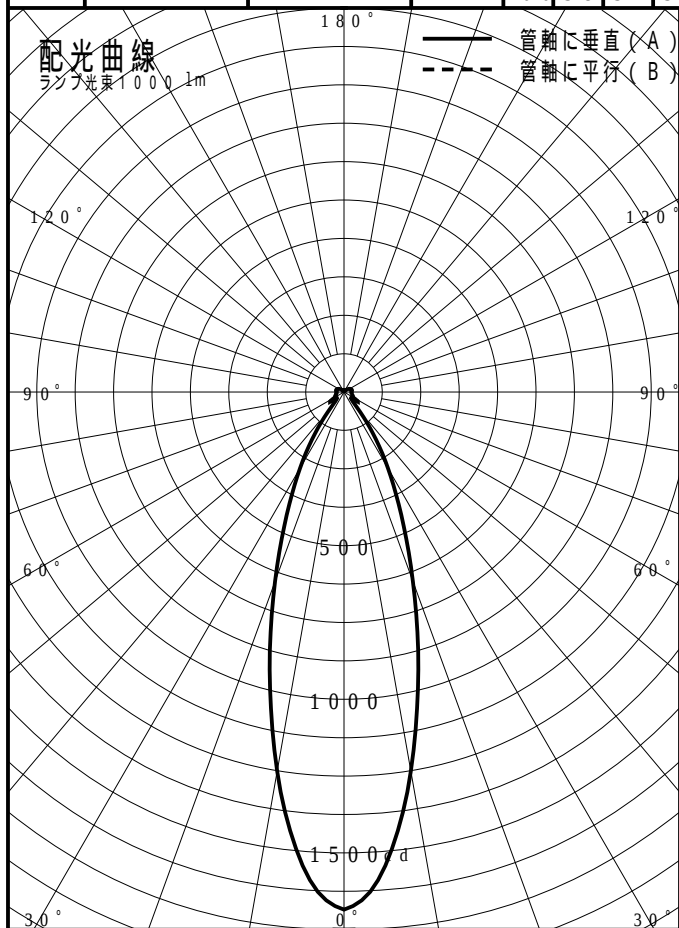

直射水平面照度

ランプ光束1000lm

