

屋内照明器具特性

品番 (品名) S L B 1 5 1 8 1 + S L K 2 2 0 0 3 + S L K 2 9 0

光源 L L D 2 4 1 1 L C B 1 × 1 5 0 0 . 0 l m


管理番号 K 0 1 9 2 4 8 5 (1) D R 1

B Z 分類 B Z 1

器具効率		7 5 %	反射率	天井	8 0 %				7 0 %				5 0 %				3 0 %				0 %
				壁	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	0 %
上方光束		0 %		床	1 0 %				1 0 %				1 0 %				1 0 %				0 %
下方光束		7 5 %		室指数	照明率 (X 0 . 0 1)																Z C M
保守率		良	0 . 6 7	0 . 6	6 3	5 8	5 5	5 3	6 2	5 8	5 5	5 3	6 1	5 8	5 5	5 3	6 0	5 7	5 5	5 3	5 2
		中	0 . 6 3	0 . 8	6 8	6 4	6 1	5 9	6 7	6 3	6 1	5 9	6 6	6 3	6 0	5 9	6 5	6 2	6 0	5 9	5 8
		否	0 . 5 6	1 . 0	7 1	6 7	6 4	6 3	7 0	6 7	6 4	6 2	6 9	6 6	6 4	6 2	6 8	6 5	6 3	6 2	6 1
下方投影面積		c m ²		1 . 2 5	7 3	7 0	6 7	6 6	7 2	6 9	6 7	6 6	7 1	6 8	6 7	6 5	7 0	6 8	6 6	6 5	6 4
				1 . 5	7 4	7 2	7 0	6 8	7 4	7 1	6 9	6 8	7 2	7 0	6 8	6 7	7 1	6 9	6 8	6 7	6 5
等価発光面積		c m ²		2 . 0	7 6	7 4	7 2	7 1	7 5	7 3	7 2	7 0	7 4	7 2	7 1	7 0	7 3	7 1	7 0	6 9	6 8
取付高さ	器具間隔最大限		2 . 5	7 7	7 5	7 4	7 3	7 6	7 5	7 3	7 2	7 5	7 4	7 2	7 1	7 4	7 2	7 2	7 1	6 9	
	横方向 (A)	縦方向 (B)	3 . 0	7 8	7 6	7 5	7 4	7 7	7 6	7 4	7 3	7 6	7 4	7 3	7 3	7 4	7 3	7 2	7 2	7 0	
H m	0 . 7 0 H m	0 . 7 0 H m	4 . 0	7 9	7 8	7 7	7 6	7 8	7 7	7 6	7 5	7 6	7 6	7 5	7 4	7 5	7 4	7 4	7 3	7 1	
			5 . 0	7 9	7 8	7 7	7 7	7 9	7 8	7 7	7 6	7 7	7 6	7 6	7 5	7 5	7 5	7 4	7 4	7 2	
			7 . 0	8 0	7 9	7 9	7 8	7 9	7 8	7 8	7 7	7 8	7 7	7 7	7 6	7 6	7 6	7 5	7 5	7 3	
			1 0 . 0	8 0	8 0	7 9	7 9	8 0	7 9	7 9	7 8	7 8	7 8	7 7	7 7	7 6	7 6	7 6	7 6	7 4	

配光曲線

ランプ光束 1 0 0 0 l m

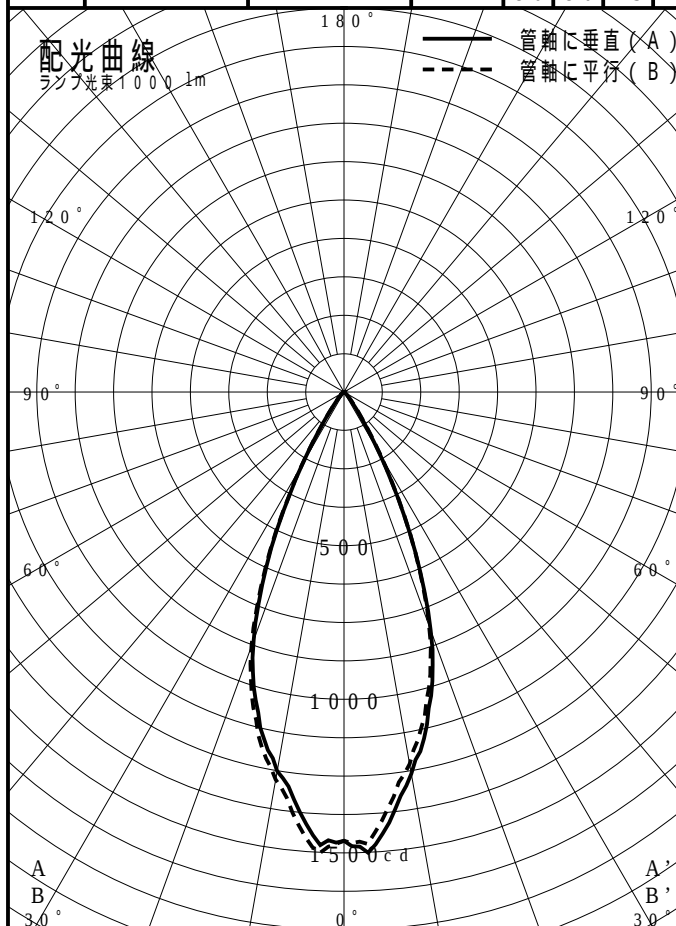

直射水平面照度

ランプ光束 1 0 0 0 l m

