


非常用照明器具特性

配光曲線

ランプ光束1000lm

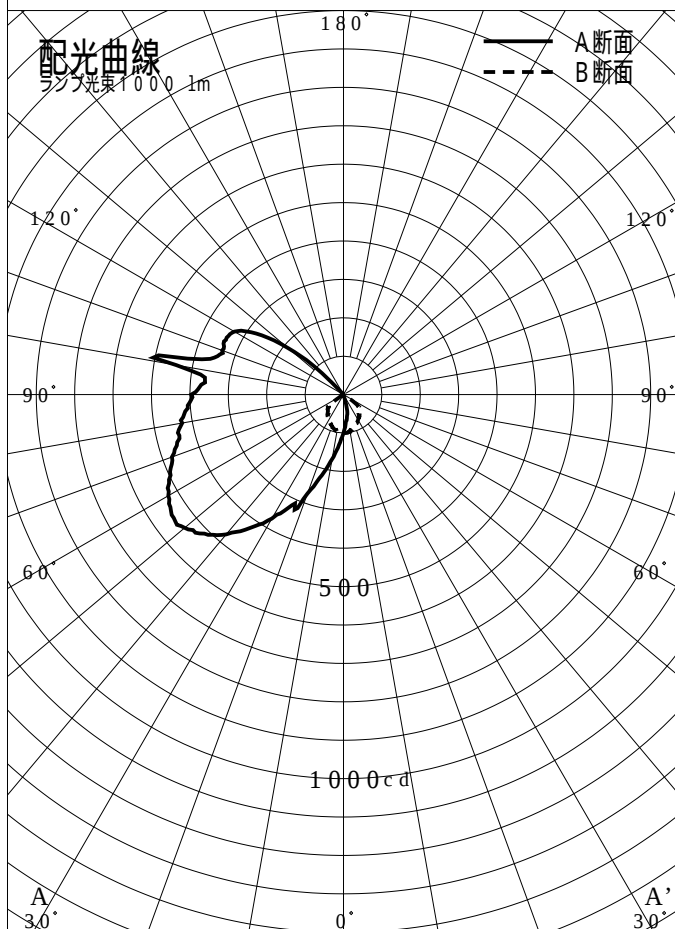

品番 XL F 4 3 6 P T N (W A L L)

名称

光源

管理番号

光束

保守率

適用品番

XL F 4 3 6 P T N (W A L L)

備考

LED5000 / 98 / 480

K0151849(7) DR1

960lm x 1.00

0.93

設計照度Eを得るための読取照度

E = 2.0

E = 1.0

E = 0.5

2.2


1.1

0.6


非常点灯時の照度 (60 分後)

直射水平面照度

ランプ光束1000lm

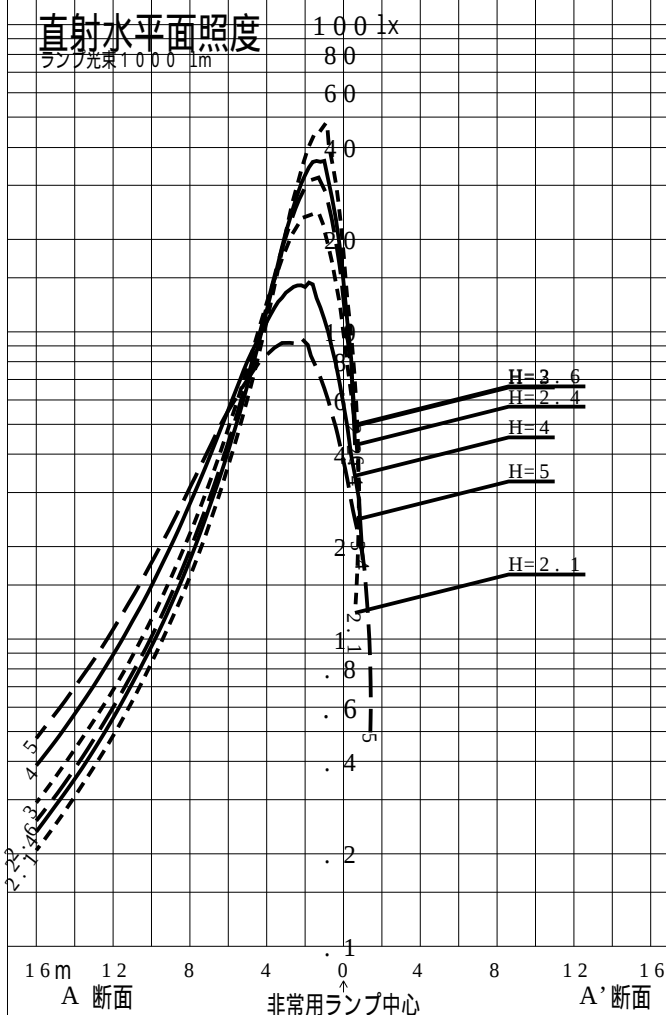

100 lx

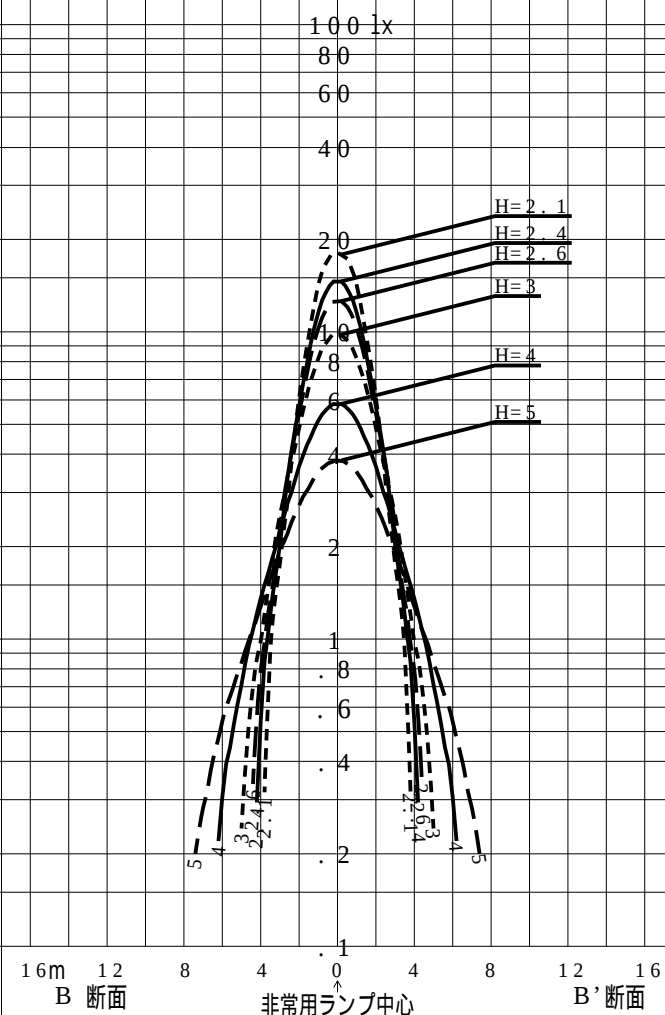

品番	X L F 4 3 6 P T N (W A L L)			
名称				
光源	L E D 5 0 0 0 / 9 8 / 4 8 0			
管理番号	K 0 1 5 1 8 4 9 (7) D R 1			
光束	9 6 0 . 0 l m * 1 . 0 0		備考	非常点灯時の照度 (6 0 分後)
保守率	0 . 9 3			

非常灯配置表

器具取付高さ (m)																
単体配置																
直線配置																
四角配置																
壁からの距離 (最大)																

器具取付高さ (m)																
単体配置																
直線配置																
四角配置																
壁からの距離 (最大)																

器具取付高さ (m)																
単体配置																
直線配置																
四角配置																
壁からの距離 (最大)																

階段配置表

器具取付高さ (m)			1 . 0	1 . 5	2 . 0	2 . 5	3 . 0	4 . 0	5 . 0	6 . 0		
Y = 1 . 0 (m)	2 . 0 L x	X +	5 . 3	6 . 1	6 . 7	7 . 3	7 . 8	8 . 5	9 . 0	9 . 4		
		X -	0 . 3	0 . 4	0 . 5	0 . 6	0 . 7	0 . 8	0 . 6	0 . 2		
	1 . 0 L x	X +	6 . 7	7 . 8	8 . 7	9 . 3	10 . 0	11 . 0	11 . 7	12 . 4		
Y = 1 . 5 (m)	2 . 0 L x	X +	4 . 9	5 . 8	6 . 5	7 . 1	7 . 6	8 . 3	8 . 9	9 . 2		
		X -	0 . 1	0 . 3	0 . 4	0 . 5	0 . 6	0 . 7	0 . 5	0 . 0		
	1 . 0 L x	X +	6 . 5	7 . 6	8 . 4	9 . 2	9 . 8	10 . 8	11 . 6	12 . 3		
Y = 2 . 0 (m)	2 . 0 L x	X +	4 . 5	5 . 4	6 . 2	6 . 8	7 . 3	8 . 1	8 . 7			
		X -	0 . 0	0 . 2	0 . 3	0 . 4	0 . 5	0 . 6	0 . 3			
	1 . 0 L x	X +	6 . 1	7 . 2	8 . 1	8 . 9	9 . 5	10 . 6	11 . 4			