

屋内照明器具特性

品番 (品名) S L B 1 5 7 8 0 + S L K 2 2 0 0 4 + S L K 2 9 0

光源 L L D 3 4 1 1 L C B 1 × 1 7 0 0 . 0 l m


管理番号 K 0 1 9 2 4 8 2 (1) D R 1

B Z 分類 B Z 1

器具効率		75 %	反射率	天井	80 %				70 %				50 %				30 %				0 %		
				壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0 %		
上方光束		0 %		床	10 %				10 %				10 %				10 %				0 %		
下方光束		75 %		室指数	照明率 (X0.01)																		Z C M
保守率		良	0.67	0.6	62	58	55	53	62	58	55	53	61	57	55	53	60	57	54	53	52		
		中	0.63	0.8	67	63	61	59	67	63	60	59	66	62	60	58	65	62	60	58	57		
		否	0.56	1.0	70	67	64	62	69	66	64	62	68	65	63	62	67	65	63	62	61		
下方投影面積		c m ²		1.25	72	69	67	65	72	69	67	65	70	68	66	65	69	67	66	64	63		
等価発光面積		c m ²		1.5	74	71	69	67	73	71	69	67	72	70	68	67	71	69	67	66	65		
				2.0	76	74	72	70	75	73	71	70	74	72	70	69	72	71	70	69	67		
取付	器具間隔最大限			2.5	77	75	73	72	76	74	73	72	75	73	72	71	73	72	71	70	69		
高さ	横方向 (A)		縦方向 (B)	3.0	77	76	75	73	77	75	74	73	75	74	73	72	74	73	72	71	70		
H m	0.71 H m		0.71 H m	4.0	78	77	76	75	78	76	75	75	76	75	74	74	75	74	73	73	71		
				5.0	79	78	77	76	78	77	76	76	76	76	75	75	75	74	74	73	72		
				7.0	79	79	78	77	79	78	77	77	77	77	76	76	76	75	75	74	72		
				10.0	80	79	79	78	79	79	78	78	77	77	77	76	76	76	75	75	73		

配光曲線

ランプ光束 1 0 0 0 l m

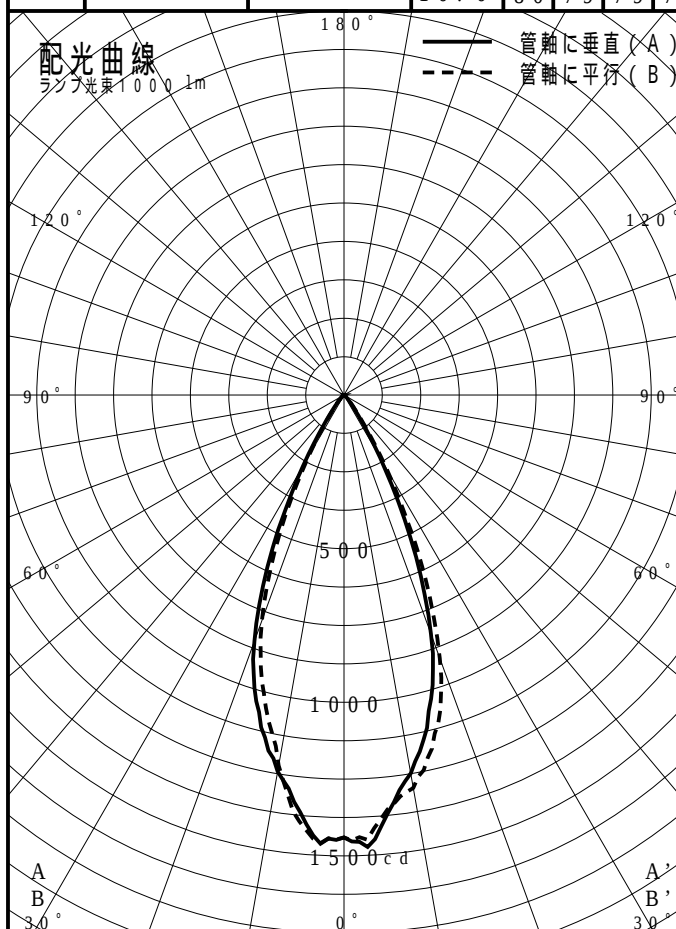

直射水平面照度

ランプ光束 1 0 0 0 l m

