

屋内照明器具特性

品番 (品名) SLB15781 + SLK22002 + SLK290

光源 LLD3411LCB1 × 1 700.0 lm


管理番号 K0193684 (0) DB 1

B Z 分類 BZ1

器具効率		9 8 %	反 射 率	大 井	8 0 %				7 0 %				5 0 %				3 0 %				0 %		
				壁	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	0 %		
				床	1 0 %				1 0 %				1 0 %				1 0 %				0 %		
上方光束		7 %	室 指 数	照 明 率 (X 0 . 0 1)																		Z C M	
下方光束		9 1 %																					
保守率		良 中 否	0 . 6 3	0 . 6	8 3	7 7	7 4	7 2	8 2	7 7	7 4	7 1	8 0	7 6	7 3	7 1	7 8	7 5	7 2	7 0	6 9		
			0 . 6	0 . 8	8 7	8 2	7 9	7 6	8 6	8 1	7 8	7 6	8 4	8 0	7 7	7 5	8 2	7 9	7 6	7 4	7 3		
			0 . 5 6	1 . 0	9 0	8 5	8 2	8 0	8 9	8 4	8 1	7 9	8 6	8 3	8 0	7 8	8 4	8 1	7 9	7 7	7 5		
下方投影面積		c m ²	1 . 2 5	9 2	8 8	8 5	8 3	9 1	8 7	8 4	8 2	8 8	8 5	8 3	8 1	8 6	8 3	8 1	8 0	7 7			
			1 . 5	9 4	9 0	8 7	8 5	9 3	8 9	8 6	8 4	9 0	8 7	8 5	8 3	8 7	8 5	8 3	8 1	7 9			
等価発光面積		c m ²	2 . 0	9 6	9 3	9 0	8 8	9 5	9 2	8 9	8 7	9 2	8 9	8 7	8 6	8 9	8 7	8 5	8 4	8 1			
取付	器具間隔最大限		2 . 5	9 8	9 5	9 3	9 0	9 6	9 4	9 1	8 9	9 3	9 1	8 9	8 8	9 0	8 8	8 7	8 6	8 2			
	横方向 (A)	縦方向 (B)	3 . 0	9 9	9 6	9 4	9 2	9 7	9 5	9 3	9 1	9 4	9 2	9 0	8 9	9 1	8 9	8 8	8 7	8 3			
H m	0 . 7 5 H m	0 . 7 5 H m	4 . 0	1 0 0	9 8	9 6	9 4	9 8	9 6	9 5	9 3	9 5	9 3	9 2	9 1	9 2	9 1	8 9	8 9	8 5			
			5 . 0	1 0 1	9 9	9 7	9 6	9 9	9 7	9 6	9 5	9 6	9 4	9 3	9 2	9 2	9 1	9 0	9 0	8 6			
			7 . 0	1 0 2	1 0 0	9 9	9 8	1 0 0	9 9	9 8	9 6	9 6	9 5	9 5	9 4	9 3	9 2	9 2	9 1	8 7			
			1 0 . 0	1 0 2	1 0 1	1 0 0	1 0 0	1 0 1	1 0 0	9 9	9 8	9 7	9 6	9 6	9 5	9 4	9 3	9 3	9 2	8 8			

配光曲線

ランプ光束1000lm

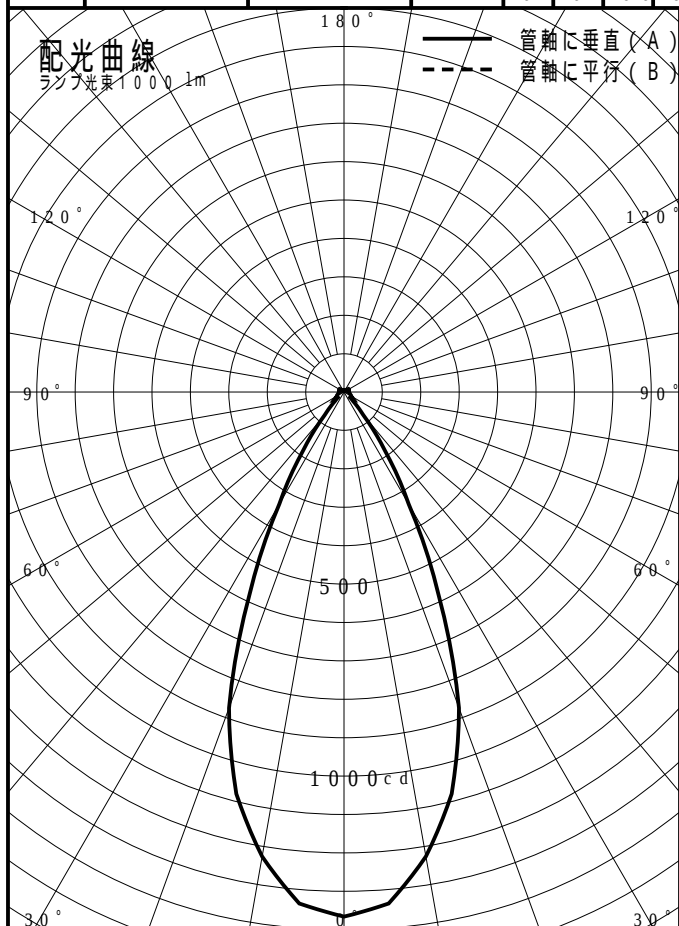

直射水平面照度

ランプ光束1000lm

