

屋内照明器具特性

品番 (品名) S L B 1 5 7 8 1 + S L K 2 2 0 0 3 + S L K 2 9 0

光源 L L D 2 4 2 1 L C B 1 × 1 5 0 0 . 0 l m

管理番号 K 0 1 9 3 6 9 2 (0) D B 1


B Z 分類 B Z 1 / 1 . 1 / B Z 2 / 3 . 5 / B Z 3

器具効率	93 %	反射率	天井	80 %				70 %				50 %				30 %				0 %
			壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0 %
			床	10 %				10 %				10 %				10 %				0 %
			室指数	照明率 (X 0 . 0 1)																Z C M
上方光束	9 %																			
下方光束	84 %																			

保守率	良	0.63	0.6	66	58	53	50	65	58	53	50	63	56	52	49	60	55	51	49	47	
	中	0.6	0.8	73	65	60	57	71	65	60	56	68	63	59	56	66	61	58	55	53	
	否	0.56	1.0	77	70	65	62	75	69	65	61	72	67	63	60	69	65	62	59	57	
方投影面積			cm ²	1.25	81	75	70	66	79	73	69	66	76	71	67	64	73	69	66	63	60
等価発光面積			cm ²	1.5	83	78	73	70	81	76	72	69	78	74	70	68	75	71	69	66	63
				2.0	87	82	78	75	85	80	77	74	81	78	75	72	78	75	72	70	67
寸	器具間隔最大限			2.5	89	85	81	78	87	83	80	77	83	80	77	75	80	77	75	73	70
寸	横方向 (A)		縦方向 (B)	3.0	90	87	83	81	88	85	82	80	84	82	79	77	81	79	77	75	71
mm	0.48H mm		0.51H mm	4.0	92	89	87	84	90	87	85	83	86	84	82	80	83	81	79	78	74
				5.0	93	91	88	86	91	89	87	85	87	86	84	82	84	82	81	80	75
				7.0	95	93	91	89	93	91	89	88	89	87	86	85	85	84	83	82	77
				10.0	96	94	93	91	94	92	91	90	90	89	88	87	86	85	84	84	79

配光曲線

ランプ光束1000lm

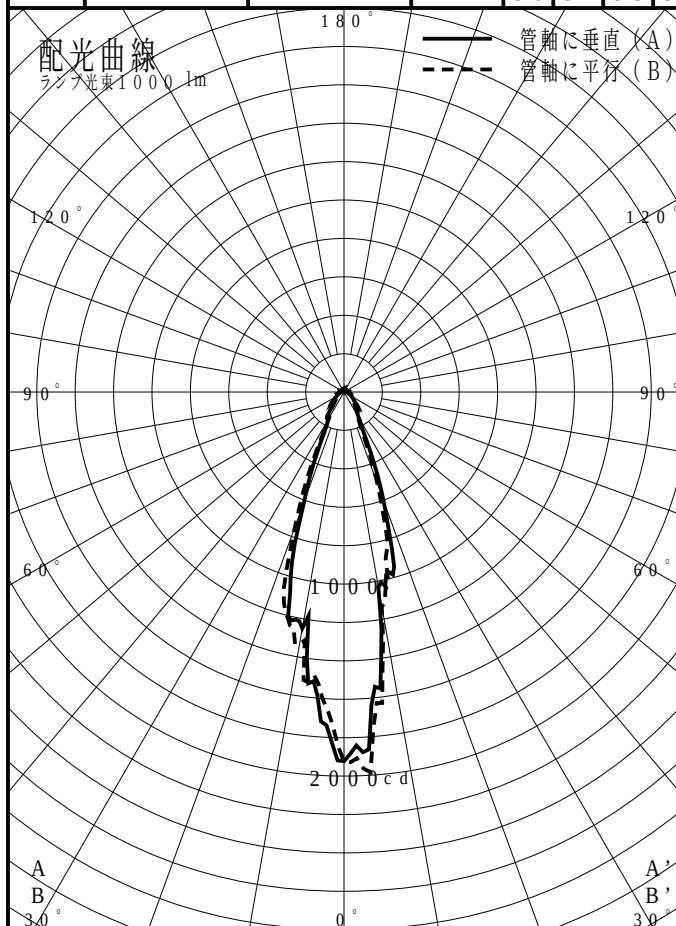

直射水平面照度

ランプ光束1000lm

