

屋内照明器具特性

品番 (品名) S L B 1 5 7 8 1 + S L K 2 2 0 0 8 + S L K 2 9 0

光源 L L D 3 4 1 1 L C B 1 × 1 7 0 0 . 0 l m


管理番号 K 0 1 9 3 6 8 4 (0) D B 1

B Z 分類 B Z 1

器具効率		98 %	反射率	天井	80 %				70 %				50 %				30 %				0 %	
				壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0 %	
				床	10 %				10 %				10 %				10 %				0 %	
上方光束		7 %	室指数	照明率 (X0.01)																		Z C M
下方光束		91 %																				
保守率		良	0.63	0.6	83	77	74	72	82	77	74	71	80	76	73	71	78	75	72	70	69	
		中	0.6	0.8	87	82	79	76	86	81	78	76	84	80	77	75	82	79	76	74	73	
		否	0.56	1.0	90	85	82	80	89	84	81	79	86	83	80	78	84	81	79	77	75	
下方投影面積		c m ²		1.25	92	88	85	83	91	87	84	82	88	85	83	81	86	83	81	80	77	
				1.5	94	90	87	85	93	89	86	84	90	87	85	83	87	85	83	81	79	
等価発光面積		c m ²		2.0	96	93	90	88	95	92	89	87	92	89	87	86	89	87	85	84	81	
				2.5	98	95	93	90	96	94	91	89	93	91	89	88	90	88	87	86	82	
取付高さ	器具間隔最大限		3.0	99	96	94	92	97	95	93	91	94	92	90	89	91	89	88	87	83		
	横方向 (A)	縦方向 (B)																				
H m	0.75 H m	0.75 H m	4.0	100	98	96	94	98	96	95	93	95	93	92	91	92	91	89	89	85		
			5.0	101	99	97	96	99	97	96	95	96	94	93	92	92	91	90	90	86		
			7.0	102	100	99	98	100	99	98	96	96	95	95	94	93	92	92	91	87		
			10.0	102	101	100	100	101	100	99	98	97	96	96	95	94	93	93	92	88		

配光曲線

ランプ光束 1 0 0 0 l m

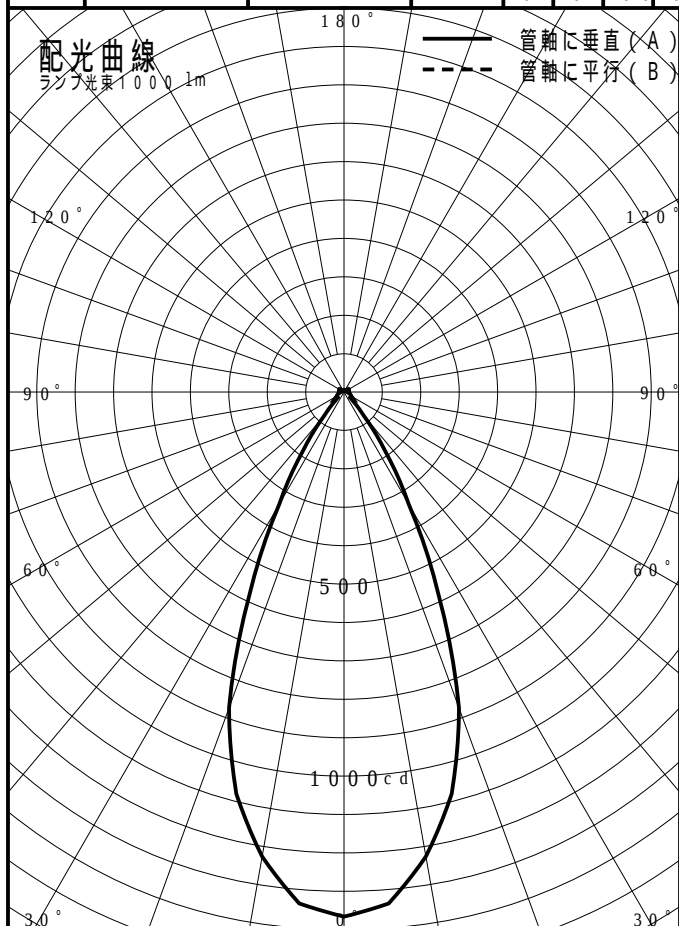

直射水平面照度

ランプ光束 1 0 0 0 l m

