

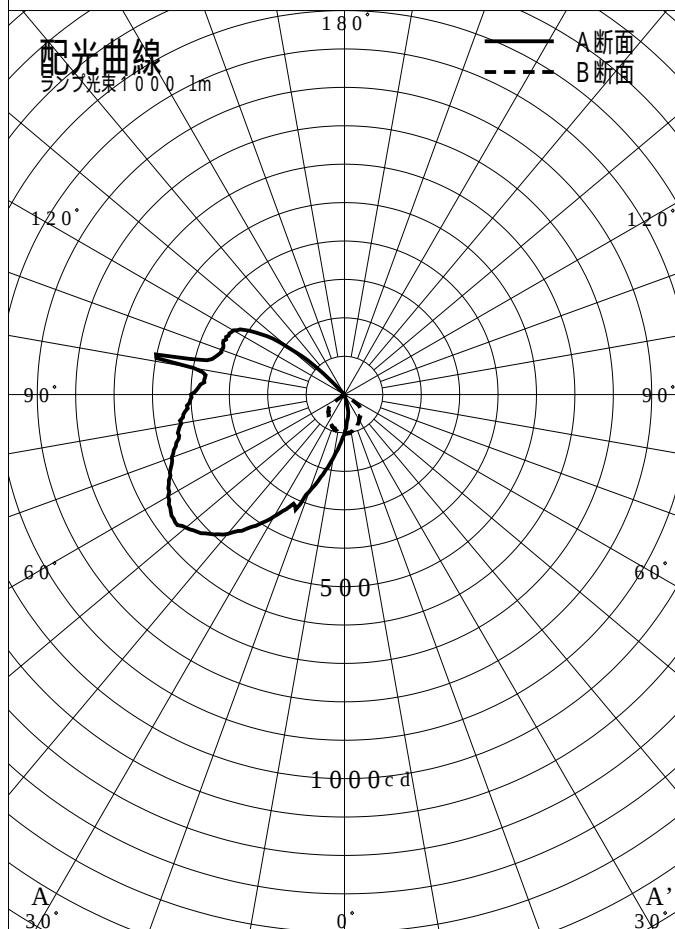


非常用照明器具特性

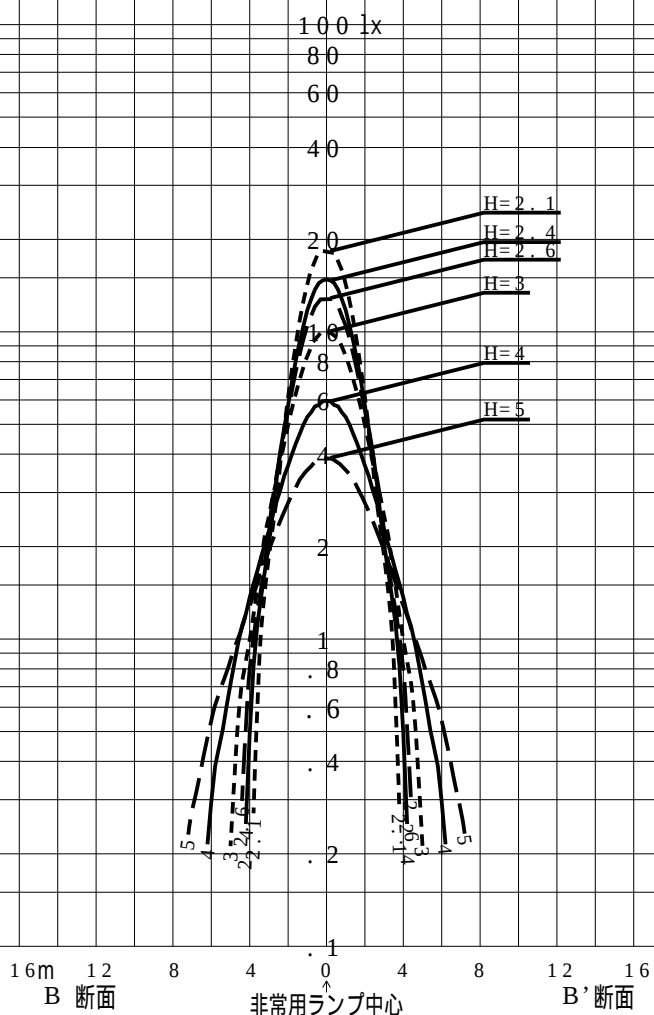

品番	XL F 4 3 3 DTN(WALL)		
名称			
光源	LED5000 / 98 / 480		
管理番号	K0151852(7) DR1		
光束	960lm x 1.00		
保守率	0.93		
適用品番	設計照度Eを得るための読取照度		
	E = 2.0	E = 1.0	E = 0.5
XL F 4 3 3 DTN(WALL)	2.2	1.1	0.6
備考	非常点灯時の照度 (30 分後)		

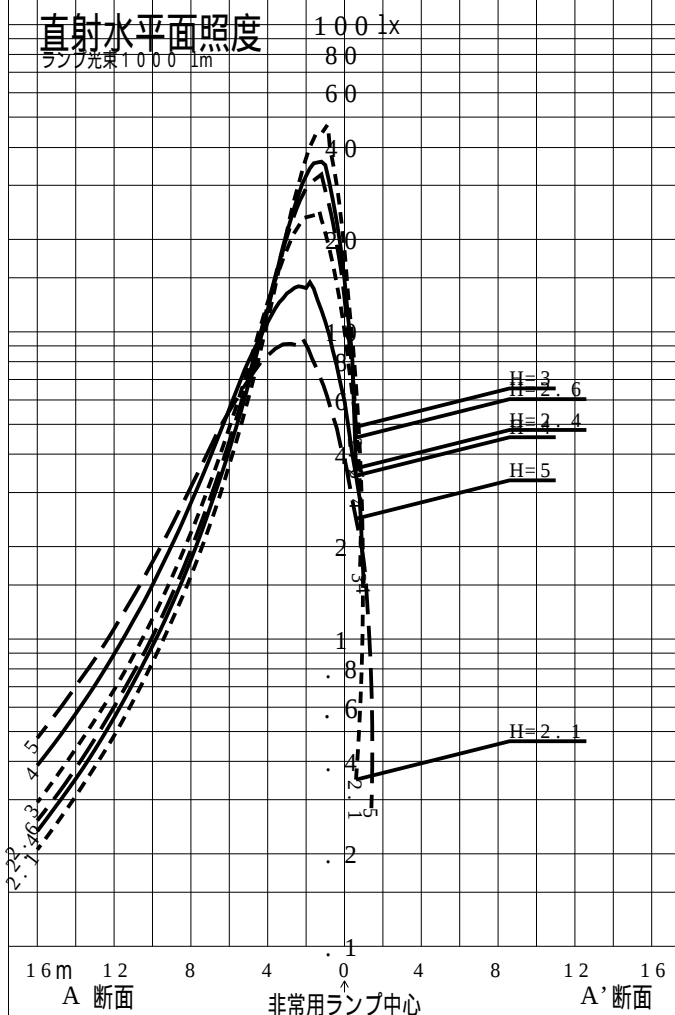

品番	XLF 4 3 3 DTN(WALL)				
名称					
光源	LED5 0 0 0 / 9 8 / 4 8 0				
管理番号	K0 1 5 1 8 5 2 (7) DR 1				
光束	9 6 0 . 0 l m * 1 . 0 0			備考	非常点灯時の照度 (3 0 分後)
保守率	0 . 9 3				

非常灯配置表

器具取付高さ (m)																
単体配置																
直線配置																
四角配置																
壁からの距離 (最大)																

器具取付高さ (m)																
単体配置																
直線配置																
四角配置																
壁からの距離 (最大)																

器具取付高さ (m)																
単体配置																
直線配置																
四角配置																
壁からの距離 (最大)																

階段配置表

器具取付高さ (m)			1. 0	1. 5	2. 0	2. 5	3. 0	4. 0	5. 0	6. 0		
Y=1. 0 (m)	2. 0 L x	X+	5. 3	6. 1	6. 7	7. 3	7. 8	8. 5	9. 0	9. 4		
		X-	0. 3	0. 3	0. 5	0. 6	0. 7	0. 8	0. 6	0. 2		
	1. 0 L x	X+	6. 7	7. 8	8. 7	9. 4	10. 0	11. 0	11. 8	12. 4		
Y=1. 5 (m)	2. 0 L x	X+	4. 9	5. 8	6. 5	7. 1	7. 6	8. 4	8. 9	9. 2		
		X-	0. 1	0. 3	0. 4	0. 5	0. 6	0. 7	0. 5	0. 1		
	1. 0 L x	X+	6. 5	7. 6	8. 4	9. 2	9. 8	10. 8	11. 6	12. 3		
Y=2. 0 (m)	2. 0 L x	X+	4. 5	5. 4	6. 2	6. 8	7. 3	8. 1	8. 7			
		X-	0. 0	0. 2	0. 3	0. 4	0. 5	0. 6	0. 3			
	1. 0 L x	X+	6. 1	7. 2	8. 1	8. 9	9. 5	10. 6	11. 5			