

屋内照明器具特性

品番 (品名) S L B 1 5 7 8 1 + S L K 2 2 0 1 3 + S L K 2 9 0

光源 L L D 3 4 2 1 L C B 1 × 1 7 0 0 . 0 l m


管理番号 K 0 1 9 3 6 8 5 (0) D B 1

B Z 分類 B Z 1 / 1 . 8 / B Z 2 / 8 . 5 / B Z 3

器具効率		97 %	反射率	天井	80 %				70 %				50 %				30 %				0 %		
				壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0 %		
上方光束		11 %		床	10 %				10 %				10 %				10 %				0 %		
下方光束		86 %		室指数	照明率 (X0.01) ZCM																		
保守率		良	0.63	0.6	70	62	57	54	69	61	57	53	66	60	56	53	64	58	55	52	50		
		中	0.6	0.8	77	69	65	61	75	68	64	60	72	66	62	59	69	64	61	58	56		
		否	0.56	1.0	81	74	70	66	79	73	69	65	76	71	67	64	73	68	65	63	60		
下方投影面積		cm ²		1.25	85	79	74	71	83	77	73	70	79	75	71	68	76	72	69	67	63		
等価発光面積		cm ²		1.5	87	82	77	74	85	80	76	73	81	77	74	71	78	74	72	69	66		
				2.0	91	86	82	79	89	84	81	78	84	81	78	76	81	78	75	73	70		
取付	器具間隔最大限			2.5	93	89	85	82	91	87	84	81	86	83	81	79	82	80	78	76	72		
高さ	横方向 (A)		縦方向 (B)	3.0	94	91	88	85	92	89	86	84	88	85	83	81	84	82	80	78	74		
H _m	0.54 H _m		0.54 H _m	4.0	96	93	91	88	94	91	89	87	89	87	85	84	85	84	82	81	76		
				5.0	97	95	93	91	95	93	91	89	91	89	87	86	86	85	84	83	78		
				7.0	99	97	95	94	96	95	93	92	92	91	89	88	88	87	86	85	79		
				10.0	100	98	97	96	97	96	95	94	93	92	91	90	89	88	87	86	81		

配光曲線

ランプ光束 1 0 0 0 l m

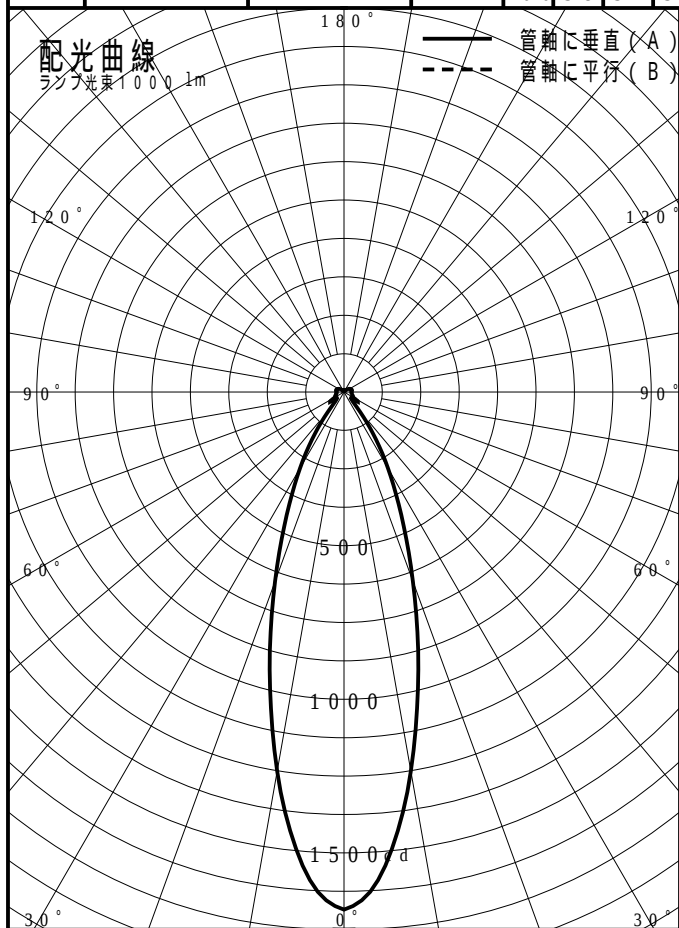

直射水平面照度

ランプ光束 1 0 0 0 l m

